


RADIO

JANUARY, 1945

Design • Production • Operation

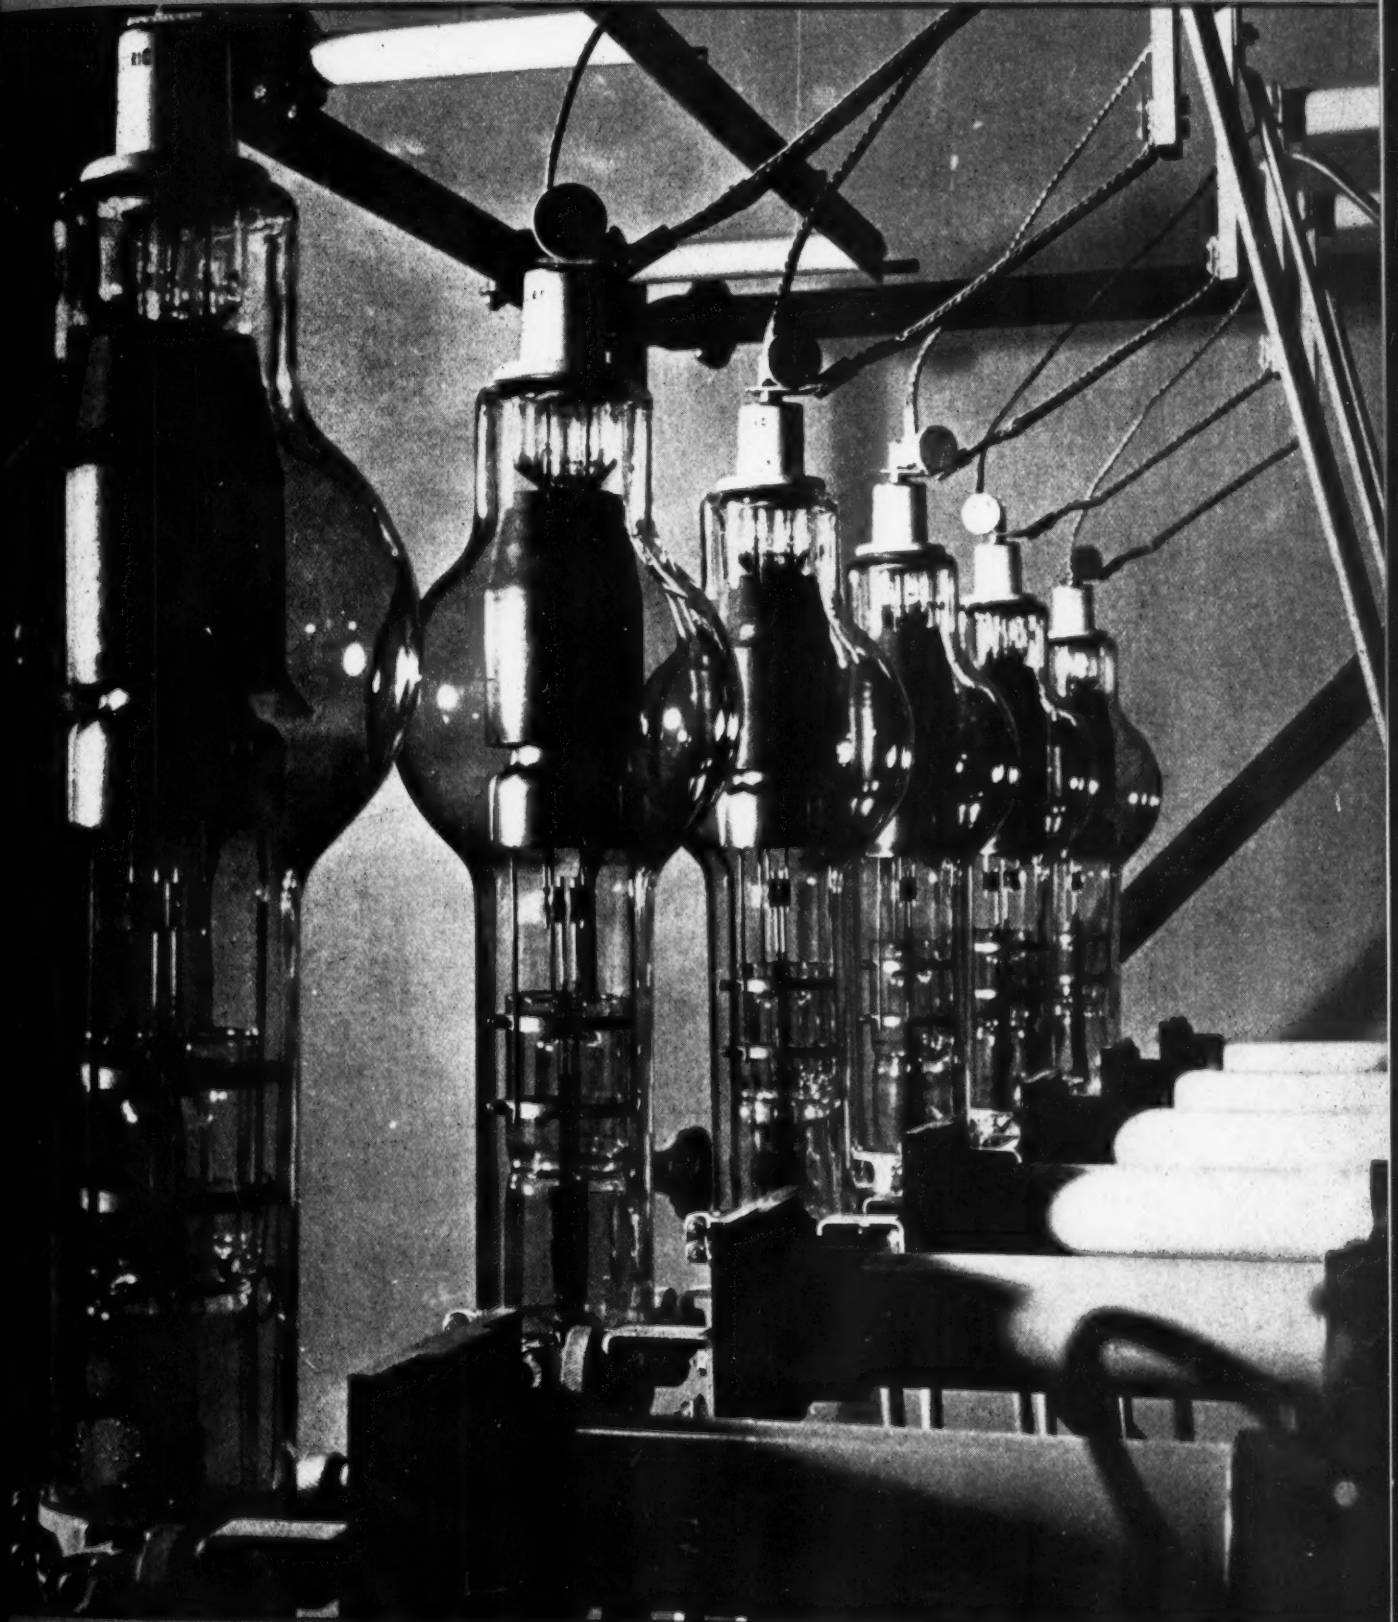

The Journal for Radio & Electronic Engineers

"Meet Your Navy"




DEVOTED TO RESEARCH AND THE MANUFACTURE OF TUBES AND EQUIPMENT FOR THE NEW ERA OF ELECTRONICS

WHAT THE WELL DRESSED TUBES ARE WEARING

MYKROY

PERFECTED MICA CERAMIC INSULATION

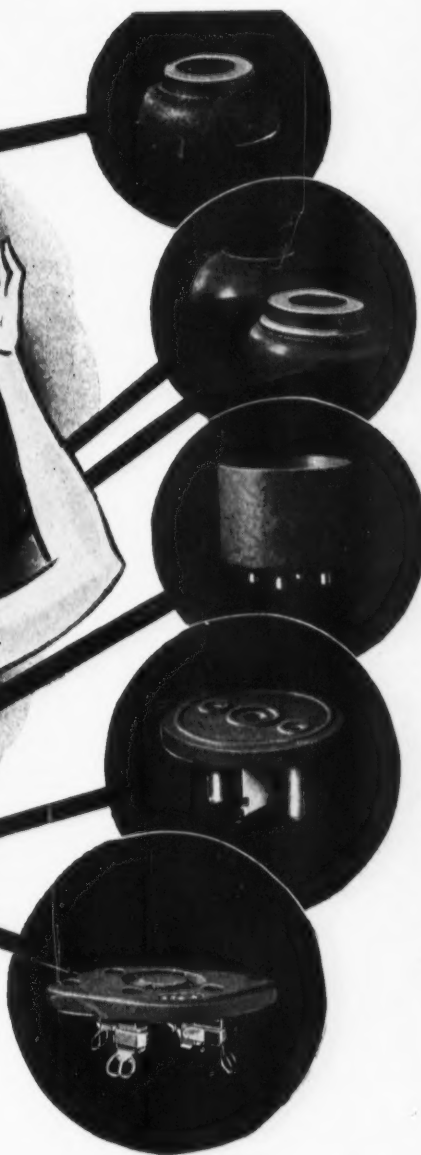

In their design considerations leading Tube Manufacturers are now specifying MYKROY because it provides the ideal combination of essential insulation characteristics . . . low-loss — dimensional stability — high strength and heat resistance.

Through advanced engineering ideas utilizing improved materials and better techniques, modern radio tubes achieve a high degree of efficiency. Complete vacuums within the tubes provide the perfect low-loss inter-electrode insulation; externally, however, insulation of lower dielectric properties is often used, considerably reducing tube efficiency.

The external leaks that occur at plate, grid, filament, tube base and socket terminals due to poor insulation, seriously reduce power output. To reduce these external power losses to a negligible minimum, you can now obtain tube accessories and parts made of MYKROY . . . the perfected mica ceramic insulation.

Write for full information today. Ask for your copy of the MYKROY Bulletin #104 — containing the scientific facts about this vastly improved Radio Tube Insulator.



MADE EXCLUSIVELY BY

ELECTRONIC MECHANICS
INC.

70 CLIFTON BLVD. CLIFTON, N. J.
CHICAGO 47, 1917 N. Springfield Ave., Tel. Albany 4310
EXPORT OFFICE: 89 Broad Street, New York 4, New York

MYKROY IS SUPPLIED IN SHEETS AND RODS — MACHINED OR MOLDED TO SPECIFICATIONS

MECHANICAL PROPERTIES*

MODULUS OF RUPTURE	18000-21000psi
HARDNESS	
Mohs Scale 3-4 BHN. BHN 500 K9 Load. 63-74	
IMPACT STRENGTH	ASTM Charpy .34-.41 ft. lbs.
COMPRESSION STRENGTH	42000 psi
SPECIFIC GRAVITY	2.75-3.8
THERMAL EXPANSION	.000006 per Degree Fahr.
APPEARANCE	Brownish Grey to Light Tan


ELECTRICAL PROPERTIES*

DIELECTRIC CONSTANT	6.5-7
DIELECTRIC STRENGTH (1/2")	630 Volts per Mil
POWER FACTOR	.001-.002 (Meets AWS L-4)

*THESE VALUES COVER THE VARIOUS GRADES OF MYKROY

- GRADE 8. Best for low loss requirements.
- GRADE 38. Best for low loss combined with high mechanical strength.
- GRADE 51. Best for molding applications.

Special formulas compounded for special requirements.

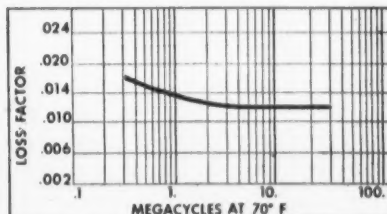

Based on Power Factor Measurements made by Boonton Radio Corp. on standard Mykroy stock.

THE Right Cable FOR THE JOB
NOT BY ACCIDENT... BUT BY DESIGN

Federal Telephone and Radio Corporation

TABLE I—SINGLE BRAID TYPES

Designation	Impedance, ohms	Capacity, p.f./ft.	Attenuation, db/100 ft.	Weight, lb./100 ft.
10-1	50	1.5	1.5	1.5
10-2	50	1.5	1.5	1.5
10-3	50	1.5	1.5	1.5
10-4	50	1.5	1.5	1.5
10-5	50	1.5	1.5	1.5
10-6	50	1.5	1.5	1.5
10-7	50	1.5	1.5	1.5
10-8	50	1.5	1.5	1.5
10-9	50	1.5	1.5	1.5
10-10	50	1.5	1.5	1.5

TABLE II—DOUBLE BRAID TYPES

Designation	Impedance, ohms	Capacity, p.f./ft.	Attenuation, db/100 ft.	Weight, lb./100 ft.
20-1	50	1.5	1.5	1.5
20-2	50	1.5	1.5	1.5
20-3	50	1.5	1.5	1.5
20-4	50	1.5	1.5	1.5
20-5	50	1.5	1.5	1.5
20-6	50	1.5	1.5	1.5
20-7	50	1.5	1.5	1.5
20-8	50	1.5	1.5	1.5
20-9	50	1.5	1.5	1.5
20-10	50	1.5	1.5	1.5

TABLE III—ARMORED TYPES

Designation	Impedance, ohms	Capacity, p.f./ft.	Attenuation, db/100 ft.	Weight, lb./100 ft.
30-1	50	1.5	1.5	1.5
30-2	50	1.5	1.5	1.5
30-3	50	1.5	1.5	1.5
30-4	50	1.5	1.5	1.5
30-5	50	1.5	1.5	1.5
30-6	50	1.5	1.5	1.5
30-7	50	1.5	1.5	1.5
30-8	50	1.5	1.5	1.5
30-9	50	1.5	1.5	1.5
30-10	50	1.5	1.5	1.5

TABLE IV—AIR SPACED LOW CAPACITANCE TYPES

Designation	Impedance, ohms	Capacity, p.f./ft.	Attenuation, db/100 ft.	Weight, lb./100 ft.
40-1	50	1.5	1.5	1.5
40-2	50	1.5	1.5	1.5
40-3	50	1.5	1.5	1.5
40-4	50	1.5	1.5	1.5
40-5	50	1.5	1.5	1.5
40-6	50	1.5	1.5	1.5
40-7	50	1.5	1.5	1.5
40-8	50	1.5	1.5	1.5
40-9	50	1.5	1.5	1.5
40-10	50	1.5	1.5	1.5

TABLE V—DUAL CONDUCTOR (TWINAX) TYPES

Designation	Impedance, ohms	Capacity, p.f./ft.	Attenuation, db/100 ft.	Weight, lb./100 ft.
50-1	50	1.5	1.5	1.5
50-2	50	1.5	1.5	1.5
50-3	50	1.5	1.5	1.5
50-4	50	1.5	1.5	1.5
50-5	50	1.5	1.5	1.5
50-6	50	1.5	1.5	1.5
50-7	50	1.5	1.5	1.5
50-8	50	1.5	1.5	1.5
50-9	50	1.5	1.5	1.5
50-10	50	1.5	1.5	1.5

ANTENNAE LEAD IN WIRE

Designation	Impedance, ohms	Capacity, p.f./ft.	Attenuation, db/100 ft.	Weight, lb./100 ft.
60-1	50	1.5	1.5	1.5
60-2	50	1.5	1.5	1.5
60-3	50	1.5	1.5	1.5
60-4	50	1.5	1.5	1.5
60-5	50	1.5	1.5	1.5
60-6	50	1.5	1.5	1.5
60-7	50	1.5	1.5	1.5
60-8	50	1.5	1.5	1.5
60-9	50	1.5	1.5	1.5
60-10	50	1.5	1.5	1.5

TABLE VI—DUAL COAXIAL TYPES

Designation	Impedance, ohms	Capacity, p.f./ft.	Attenuation, db/100 ft.	Weight, lb./100 ft.
70-1	50	1.5	1.5	1.5
70-2	50	1.5	1.5	1.5
70-3	50	1.5	1.5	1.5
70-4	50	1.5	1.5	1.5
70-5	50	1.5	1.5	1.5
70-6	50	1.5	1.5	1.5
70-7	50	1.5	1.5	1.5
70-8	50	1.5	1.5	1.5
70-9	50	1.5	1.5	1.5
70-10	50	1.5	1.5	1.5

To assist the equipment designer Federal offers comprehensive data on high frequency cables.

This technical information sheet provides the design-engineer with pertinent electrical and physical characteristics...including impedance, capacitance, attenuation, diameter, materials, and weight... for Federal's wide variety of high-frequency cables.

Single and double braid, armored, dual con-

ductor and dual coaxial, air-spaced, low capacitance lines, and antenna lead-in wire... there's a right type for your job, backed by the built-in superiority that's a tradition with Federal.

Special developments in flexible low-loss cables by Federal have resulted in superior cables for all types of transmission. For a better job, see Federal first.

Write for your cable information sheet today.



Federal Telephone and Radio Corporation

Newark 1, N. J.



RADIO

Published by RADIO MAGAZINES, INC.

John H. Potts.....Editor
Sanford R. Cowan.....Publisher

JANUARY 1945

Vol. 29, No. 1

CONTENTS

COVER

The Western Electric rectifying tubes shown are used in the 50-kw WHN transmitter at East Rutherford, N. J. They provide an output of 18,000 volts

ARTICLES

- Problems in Locating Broadcast Transmitters—*Harold E. Ennes*... 17
An analysis of conditions which must be taken into consideration in selecting the best location for a broadcast transmitter
- Factors Involved in Choosing Insulating Materials—*P. H. Albert* 22
A discussion of the characteristics of various insulating materials, and recommendations regarding their applications to meet specific conditions in radio and electronic apparatus
- An Unbalanced Bridge RC Oscillator—*E. M. McCormick* 27
A new type of resistance-capacity oscillator to cover a frequency range of from 0.8 to 860,000 cycles
- Preparing Component Specifications—*A. C. Matthews* 30
Practical data regarding the specification of tests, materials, and requirements to be met for radio components to be used in production
- Radio Bibliography: 17—Aircraft Radio, Part 5—*F. X. Rettenmeyer* 34
- Radio Design Worksheet: No. 32—Push-Pull Circuit Fundamentals; Simple Solution of Half-Wave and Full-Wave Rectifiers 37
- The Terminology of Electromagnetic Theory, Part 7 39
Definitions of terms commonly used in microwave theory

MISCELLANEOUS

- Transients 5
- TECHNICANA
- Negative Feedback 7
- Audio-Frequency Oscillator 14
- Resistors 68
- Effect of High-Temperature Solders on Copper Wire 68
- Chart—*Bridging Loss Between Impedance* 26
- This Month 36
- New Products 41
- Chart—*Loss Due to Impedance Mismatch* 42
- Advertising Index 74

John H. Potts.....President
Sanford R. Cowan.....Sec'y-Treas.
Charles H. Farrell.....Adv. Manager
Ann Limberg.....Adv. Production
Miriam Birnbaum.....Circ. Manager

PACIFIC COAST REPRESENTATIVE

Loyd B. Chappell,
427 West 5th St., Los Angeles, Cal.



OHIO-PENNA. REPRESENTATIVE

A. Hawley & H. Stuart
Buikley Bldg., Cleveland, Ohio


GREAT BRITAIN REPRESENTATIVE

Radio Society of Great Britain,
New Ruskin House, Little Russell St.,
London, W.C. 1, England

RADIO Magazine (title registered U. S. Pat. Off.) is published monthly at Boston Post Road, Orange, Connecticut, by Radio Magazines, Inc. Executive and Editorial Offices at 342 Madison Avenue, New York 17, N. Y. Subscription rates—United States and Possessions, \$3.00 for 1 year, \$5.00 for 2 years; elsewhere \$4.00 per year. Single copies 15c. Printed in U.S.A. All rights reserved, entire contents Copyright 1945 by Radio Magazines, Inc. Entered as Second Class Matter October 31, 1943, at the Post Office at East Stroudsburg, Pa., under the Act of March 3, 1879. Permit for Second Class entry pending at Orange, Connecticut.

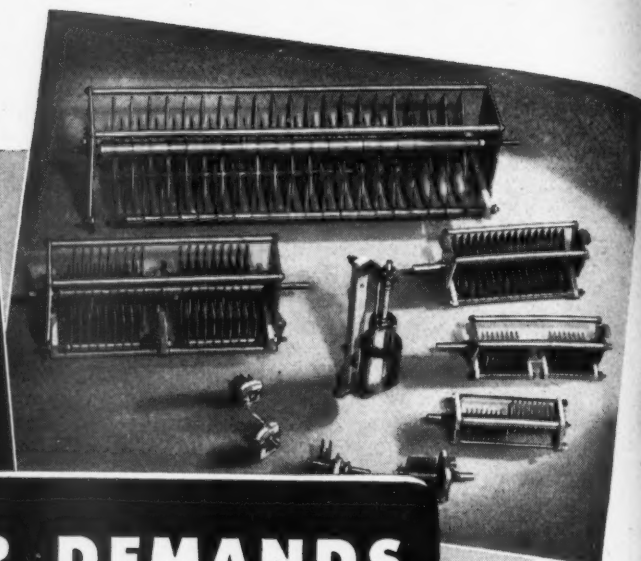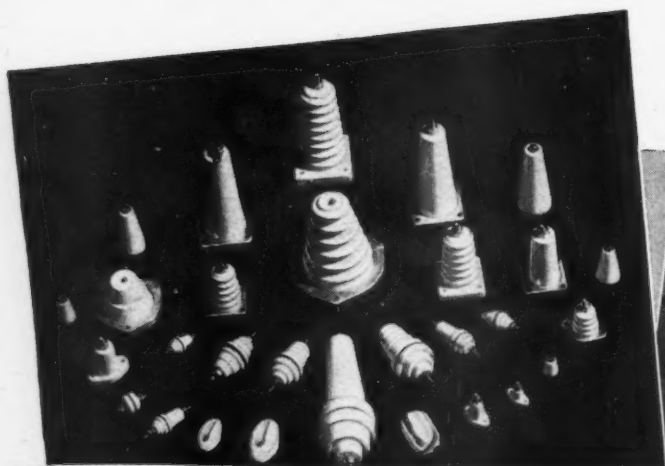

GEARED TO WAR DEMANDS

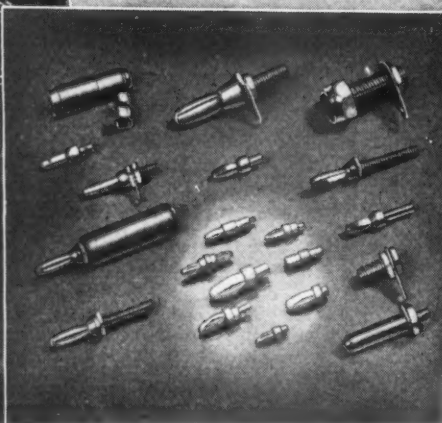

Johnson production facilities are flexible - -
10 or 10,000 - - standard specifications or
special - - repeat items or new - - any plating
- - any metal or alloy - - any insulation. If it's
metal or insulation or a combination of both,
try Johnson first.

Ask for Catalog 968 (K)

SPECIALISTS IN

- Fixed and Variable Condensers
- Porcelain and Steatite Insulators
- Plugs, Jacks, Clips and Connectors
- Fixed and Variable Inductors
- Radio Frequency Chokes
- Flexible and Rigid Insulated Couplings
- Antenna Systems and Equipment
- Mycalex Machining and Parts
- Special Insulated Assemblies
- Broadcast Station Equipment



JOHNSON

a famous name in Radio

E. F. JOHNSON COMPANY • WASECA • MINNESOTA

JANUARY, 1945 ★

RADIO

**FCC
ALL**

★As
issued
bands
25-
30-

40-
42-

44-
50-

60-
84-
102-

108-

118-
132-
144-
148-
162-
180-

216-
420-
450-
460-

470-
480-

960-
1126-
1225-
1325-
1450-
1500-
1550-
1650-
1900-

If
the w
who
und
arou
upsta
omm
reaso
wave
patin

RAT

Transients

FCC PROPOSED FREQUENCY ALLOCATIONS

★As we go to press, we learn that the FCC has just issued its report on proposed frequency allocations for bands from 25,000 to 30,000 kc as tabulated below:

25-30 mc.	Fixed and mobile operations
30-40	Fixed and mobile operations, except for aeronautical services.
40-42	Fixed and mobile operations.
42-44	Fixed and mobile operations, except aeronautical, and to be used temporarily by FM
44-50	The No. 1 television channel
50-60	Amateurs 50-54, and television channel No. 2 from 54 to 60
60-84	Television, channels 3, 4, 5 and 6.
84-102	FM
102-108	Not allocated. Reserved for future assignment to FM or other services.
108-118	Air navigation (dropping out former amateur band)
118-132	Aeronautical mobile service
132-144	Government
144-148	Amateur services
148-162	Police, fire, forestry and railroad services
162-180	Government services and navigation aids
180-216	Television, government services, and non-governmental fixed and mobile services.
216-420	Government and amateurs
420-450	Amateurs and air navigation
450-460	Air navigation, temporarily
460-470	Citizens radiocommunication service ("walkie-talkies")
470-480	Experimental facsimile broadcasting
480-960	Experimental Broadcast services, including television
960-1125	Navigation aids
1126-1225	Amateurs
1225-1325	Television relay experimentation
1325-1450	Government
1450-1500	Air navigation
1500-1550	Meteorological service
1550-1650	Experimental aeronautical mobile services
1650-1900	Government
1900-30,000	Governmental and non-governmental services

If approved, these allocations are to take effect after the war. A short period has been allotted so that those who wish to file objections to the report may do so, and undoubtedly some will. FM receives its usual kicking around, being deprived of its present band and moved upstairs to the 84-102 mc region, in defiance of the recommendations of panels 2 and 5 of the RTPB. The reason given is that the new band will eliminate sky-wave effects, and will provide more channels. Anticipating objections that this frequency shift will render

obsolete most FM broadcast receivers now in service, it is pointed out that the RTPB recommendations for a wider band in the present segment would necessitate changes, too. The FCC standpoint seems to be that half a loaf is worse than none. And it would seem that the sky-wave effects present on lower frequency f-m bands should be certainly less objectionable than similar effects on equivalent television bands which are retained.

As for television, 12 channels below 225 mc have been proposed as at present, and an additional band between 480 and 920 mc is allotted for color and high-definition systems. This gives advocates of both schools of thought on the subject an opportunity to show what they can do. For television relay experimentation, the band from 1225 to 1325 mc has been chosen.

Amateurs are assigned the 144-148 mc band, part of the 420-450 band, and frequencies from 1125 to 1225 mc. These offer interesting possibilities for development.

Unquestionably the most interesting of all proposals is that assigning a band from 460 to 470 kc for "citizens radiocommunication service". It is intended that this band be used for such applications as two-way "walkie-talkie" service, for the doctor who wants to keep in touch with his office, for farmers and others who want to contact individuals at work in fields, and for the host of other applications of similar nature which immediately are bound to occur to any imaginative person.

For the hiker, camper, and others on the go, self-propelled or otherwise, the "walkie-talkie" should soon become a necessity, with but little encouragement from advertising copy-writers. For manufacturers of this type of apparatus, and for the hundreds of thousands of people employed by them, reconversion may become something to be longed for, not a specter of despair. And this applies likewise to the manufacturers of crystals, who have been wondering what may become of them in the postwar period, and to the host of makers of component parts who have viewed glumly the constant emphasis on high-unit-cost apparatus proposed for postwar marketing, with its inevitable low sales volume prospects.

Of course, the frequency band provided for "walkie-talkies" is relatively small, but it can be enlarged. The vital point is that, for the first time, unlicensed individuals may use radio apparatus to communicate with each other. Here, indeed, is an FCC action which transcends a purely routine function and becomes an act of statesmanship. For many it will appear almost as an act of Providence!

—J. H. P.

SYLVANIA NEWS

ELECTRONIC EQUIPMENT EDITION

JANUARY

Published in the Interests of Better Sight and Sound

1945

Electronic Devices Broaden Sylvania's Service to Industry

The manufacture of electronic equipment for certain specialized communications and industrial applications is an important phase of Sylvania service. Manufacture of this type of equipment is carried



An electronic device undergoes test in the laboratories of Sylvania's Industrial Apparatus Plant.

on in a separate Industrial Apparatus Plant located at Williamsport, Pa.

This aspect of Sylvania's activities is a natural outgrowth of the company's intensive experience in the design and application of electron tubes.

DID YOU KNOW...

That Sylvania Tungsten Lamps are standard equipment for signaling purposes on many telephone switchboards? They are made in a range of electrical characteristics for use in any type of switchboard.

* * *

That Sylvania Near Ultra-Violet Lamps activate the fluorescent dials on airplane instrument panels? Lamps are small, compact, designed to operate from a 24-28 volt direct current source.

Sylvania Begins Survey of Public Interest in Television Receivers

Findings Will Assist Manufacturers in Gaging Markets, Determining Price Range

Thousands of personal interviews and an intensive advertising campaign in the pages of leading consumer publications form the twin phases of a comprehensive survey which Sylvania is launching to gage the interest of consumers in the purchase of television sets, and to learn the extent of the

LOCK-IN TUBES IDEAL FOR UHF

The trend toward the use of ultra-high frequencies brings to the fore the outstanding advantages of Sylvania's Lock-In Tubes. While the name of this line of tubes has tended to emphasize the physical details of mounting, one of the chief motivating forces in their design was the desire of Sylvania engineers to improve the electrical characteristics of tubes, particularly at the higher frequencies.

The Lock-In feature itself has been responsible for the extensive use of these tubes, particularly in automobile radios; electrical features point to wide utilization in television and FM.


SYLVESTER SURVEY



"I wonder if I could have your views on what the postwar radio will be like."

potential market for receivers in various selling price ranges. The results of this survey are expected to be of great value in guiding the planning of the manufacturers of television sets.

Television, moreover, is but one of the aspects which will be covered in this

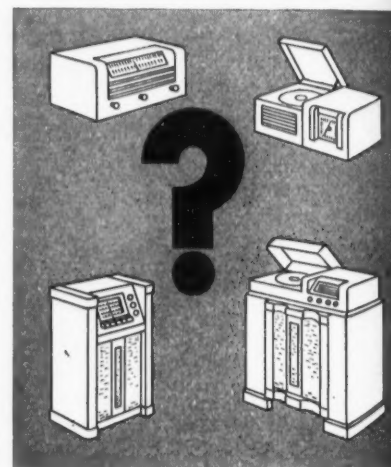

The type of set people prefer—floor or table model, radio only or radio-phonograph combination—will also be studied in the Sylvania survey.

nation-wide poll. Consumers will also be queried on such points as their interest in FM; the desirability of short-wave bands; reaction to push button tuning. The reasons why people decide on new set purchases will also come in for scrutiny.

As the survey progresses, findings will be reported from time to time in future issues of SYLVANIA NEWS.

SYLVANIA ELECTRIC

SYLVANIA ELECTRIC PRODUCTS INC., Radio Division, Emporium, Pa.

MAKERS OF RADIO TUBES, CATHODE RAY TUBES, ELECTRONIC DEVICES, FLUORESCENT LAMPS, FIXTURES, ACCESSORIES, INCANDESCENT LAMPS

TECHNICANA

NEGATIVE FEEDBACK

★ It is customary to employ inverse feedback in audio amplifier design to improve frequency response. This is particularly necessary when the output tube is a pentode or beam power tetrode having high plate resistance and the load is a loudspeaker having an impedance which varies with frequency.

Negative feedback, if excessive, may result in extreme cutback of high frequency response so that an unnatural quality is obtained from the speaker.

Some of the factors to be considered in amplifier design are discussed by S. W. Amos in the December 1944 issue of *Wireless World*. The article is entitled "Feedback and the Loudspeaker."

The equivalent electrical circuit of a dynamic loudspeaker speech coil is shown in Fig. 1, in which R and L

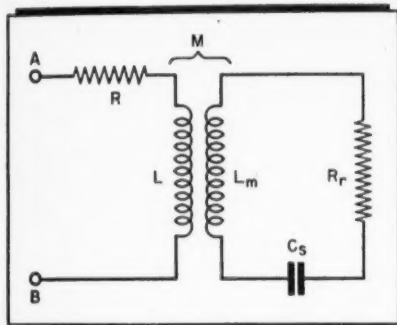


Figure 1

represent the resistance and inductance of the speech coil, L_m denotes the mass, C_s the compliance of the diaphragm and air load, and R_r is the radiation resistance representing the resistive component of the actual power radiated from the speaker.

The impedance characteristic of a typical loudspeaker is shown in Fig. 2.

The usual matching rule for triodes

(Continued on page 9)


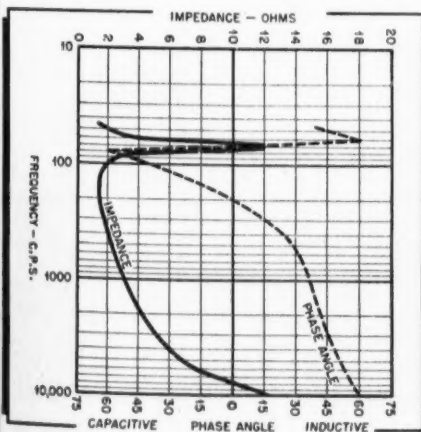


Figure 2

FAST, RELIABLE SOURCE FOR

Leading Makes of

INDUSTRIAL ELECTRONIC INSTRUMENTS

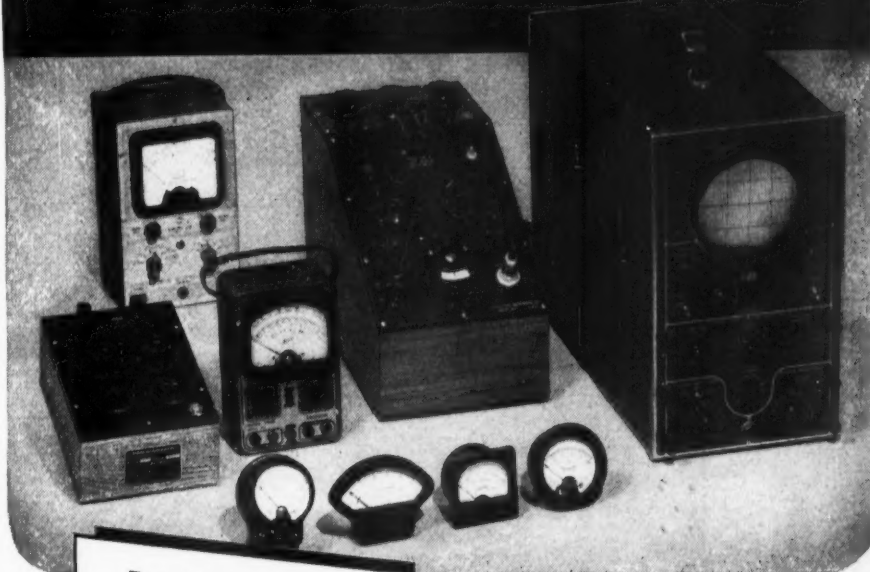

*For Measurement,
Inspection,
Testing and Control*

Allied's concentration of leading makes *under one roof* means you can obtain the type of instrument you want . . . *in the shortest time possible*. This specialized service to industry, government, and research laboratories

simplifies procurement . . . increases efficiency . . . saves hours, days, and effort. Such well known makes as RCA, Dumont, G.E., Industrial Instruments, Hickok, Radio City, Triplet and others. Many on hand for immediate delivery.

EVERYTHING IN ELECTRONICS AND RADIO

It's faster, simpler to get all your electronic and radio supplies from this one central source. We carry the largest and most complete stocks of parts and equipment under one roof . . . ready for immediate shipment. Besides, our procurement experts are in constant contact with all leading manufacturers to speed supplies.

*Save time and work . . . Call Allied First!
Write, Wire or Phone Haymarket 6800*

Helpful
BUYING
GUIDE
Available
on Request
Write for it!

ALLIED RADIO

CORPORATION

833 W. Jackson Blvd. Dept. 14-A-5 Chicago 7, Illinois

SUPPLIERS OF ELECTRONIC PARTS AND EQUIPMENT TO INDUSTRIAL AMERICA

Electronic Tubes, Rectifiers, Power Supplies, Intercommunicating Systems, Sound Systems, Photo-Cell Equipment, Batteries, Chargers, Converters, Generators, Supplies for Resistance Welders, Fuses, Test Instruments, Meters, Broadcast Station Equipment, Relays, Condensers, Capacitors, Resistors, Rheostats, Transformers, Switches, Coaxial Cable, Wire, Soldering Irons, Microphones, Speakers, Technical Books, etc.

Bring Your Electronic Projects to NATIONAL UNION




LET'S GET YOUR POST-WAR PRODUCT READY NOW

Now you don't have to postpone that important electronic research job your company may have shelved for lack of engineering manpower or equipment. National Union Laboratories offer you something you couldn't buy for "love nor money" these days . . . completely equipped modern electronic research laboratories, staffed by an outstanding group of experienced engineers.

You can strengthen your whole development program by making use of National Union facilities. You'll find National Union engineers trained in every science allied with electronics: physics, chemistry, metallurgy, mechanical and electrical engineering, glass technology. That's why National Union can provide you with a *complete* electronic service . . . from laboratory to final production . . . your own Electronic Research Department!

Let us start working with you *now*, whether on a single project or your entire research program. Arranging a consultation with National Union involves no obligation, whatever. Just write to Department I —today!

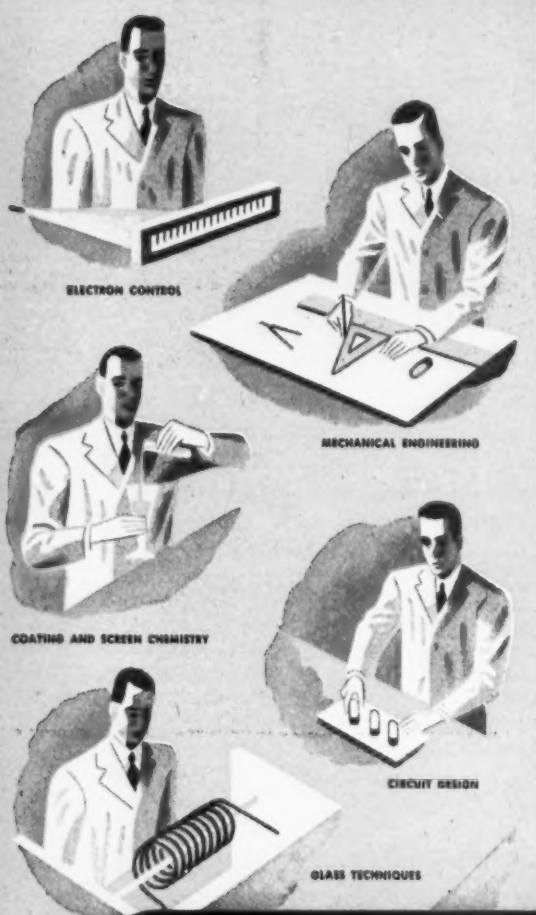

ELECTRON CONTROLS

MECHANICAL ENGINEERING

COATING AND SCREEN CHEMISTRY


CIRCUIT DESIGN

GLASS TECHNIQUES

NATIONAL UNION RESEARCH LABORATORIES

NATIONAL UNION RADIO CORPORATION

NEWARK 2, NEW JERSEY



J. F. MACENULTY, President
Pressed Steel Car Company, Inc.

"As manufacturers of transportation equipment we are constantly alert for the new developments that mean advancement and progress. We look for factors of efficiency, safety and comfort, and any development that provides these factors is a definite step forward. It would seem that..."



"VIBRATOR POWER SUPPLIES MAKE A VITAL CONTRIBUTION TO PROGRESS"


Mr. MacEnulty, Vibrator Power Supplies are truly contributing not only to the transportation industry but to many other industries as well. Wherever direct current must be changed in voltage, or to alternating current, for fluorescent lighting or other applications they have proved their advantages. They offer efficiency, versatility and economy in current conversion; and as they are now serving the armed forces with dependability, so in the electronic and electrical era of tomorrow, they will benefit many fields: Transit, railroad, aviation, marine, radio, electronic and electrical, and will have many individual applications within those fields for power outputs of up to 1000 watts.

Electronic Laboratories are pioneers in the field of vibrator conversion of current, and have developed many exclusive advantages in the heavy and light-duty power supply field. For radio telephone, aircraft radio, fluorescent lighting and electrical appliance operation and other specialized applications, Vibrator Power Supplies are the superior type of current conversion unit. . . . Consult with E-L engineers concerning your power supply problem.

E-L STANDARD POWER SUPPLY MODEL S-1050

Model S-1050 is a typical military model Vibrator Power Supply which may easily be adapted for peacetime mobile radio transmitters. Input voltage: 12 or 24 volts DC. Output voltage: 475 volts DC at 200 MA, 8 volts DC at 4.5 MA. Dimensions: 9 1/2 x 8 3/4 x 13 13/16 inches. Weight: 52 pounds.

Write for further information of this and other models.



Electronic



LABORATORIES INC.

INDIANAPOLIS

VIBRATOR POWER SUPPLIES FOR LIGHTING, COMMUNICATIONS, AND ELECTRIC MOTOR OPERATION • ELECTRIC, ELECTRONIC AND OTHER EQUIPMENT



Here all similarity ends...

from this point on, it's craftsmanship!

In one important respect there is a striking similarity between the millions of Bliley crystals which we now produce and the mere handful of custom made units that constituted our annual production when radio was still young.

In those early days of radio, when each quartz crystal was painstakingly cut and ground by hand, a tradition was born. It was a tradition of craftsmanship that has grown with the years—a tradition that Bliley engineers have successfully translated into the more intricate techniques of volume production.

Etched crystals are an outstanding discovery and development of Bliley research engineers. This technique, by means of which crystals are finished to frequency by acid action rather than abrasive action, was an established part of Bliley production long before Pearl Harbor. It has since proven to be an essential element in the manufacture of crystals that have the dependable characteristics necessary for military communication in global warfare.

We have been called upon to solve

some knotty problems. But that is nothing new at Bliley. It has been our habit to parallel new developments in radio with the right crystal for each application.

Things will be different soon. Peacetime projects will again come first. But our engineers and craftsmen will be ready, as always, with the right answer to your requirements. Don't fail to include Bliley crystals in the component specifications for your peacetime equipment.

Do more than before...

buy extra War Bonds



A new star has been added

Bliley
CRYSTALS

BLILEY ELECTRIC COMPANY UNION STATION BUILDING • ERIE, PENN.

is that
plate i
pentode
transfo
mately
pedanc
The
Fig. 3.

The
tions
Table
across
ure o
curren
is the

Tab
the co
cycles
400-c
crease
simila
a tric
The
is acc
to de
of th
radiat
along
In
quenc
with
curre
Wi
optim

RA

TECHNICANA

[Continued from page 7]

is that the load should be twice the tube plate impedance at 400 cycles. For pentodes the plate resistance, at the transformer secondary, will be approximately five times the loudspeaker impedance.

The output circuit will be similar to Fig. 3.

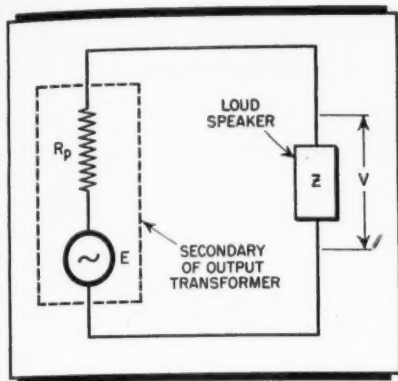


Figure 3

The author calculates circuit conditions for different frequencies as in Table I, in which V is the voltage across the voice coil which is the measure of loudspeaker output, I is the current through the voice coil, and W is the radiated power.

TABLE 1

TRIODES			
	400 cycles	10,000 cycles	70 cycles
V	$2E/3$	E	$12E/13$
I	$E/3$	$E/12$	$E/13$
Z	2	12	12
W	$2E^2/9$	$E^2/12$	$E^2/13$
PENTODES			
V	$E/6$	$3E/4$	$E/2$
I	$E/12$	$E/16$	$E/22$
Z	2	12	12
W	$E^2/72$	$3E^2/64$	$E^2/44$


Table I shows that at 10,000 cycles the coil voltage is $3/2$ times that at 400 cycles, for a triode, but $4\frac{1}{2}$ times the 400-cycle value for a pentode. The increase at bass resonant frequency is similarly greater for a pentode than for a triode.

The output at the high frequencies is accentuated by the fact that L_m tends to decrease, since only the center part of the diaphragm remains an effective radiator, and the sound is concentrated along the axis of the speaker.

In the case of pentodes at high frequencies, L_m is too small compared with the tube resistance to reduce the current to the right proportion.

With negative feedback there is an optimum value, placed by the author

[Continued on page 12]

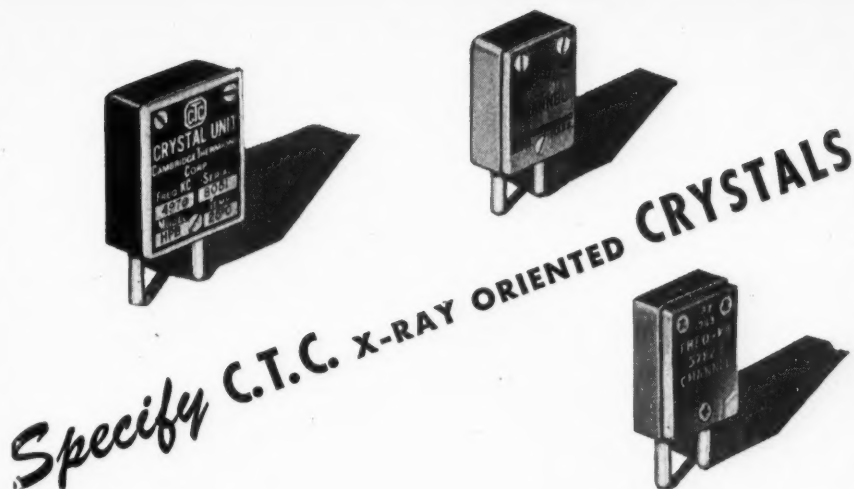

You'll find that X-RAY ORIENTATION — predetermination of the crystallographic axes of the Crystals to permit accurate cutting — insures constant frequency over a wide temperature range in every C.T.C. Crystal.


Multiple mechanical lapping operations; dimensioning by edge lapping; finishing to final frequency by etching, are among the other important operations that guarantee high activity and constant frequency throughout the long life of C.T.C. Crystals.

For prices, delivery dates etc., get in touch with

CAMBRIDGE THERMIONIC CORPORATION

454 CONCORD AVENUE


CAMBRIDGE 38, MASSACHUSETTS

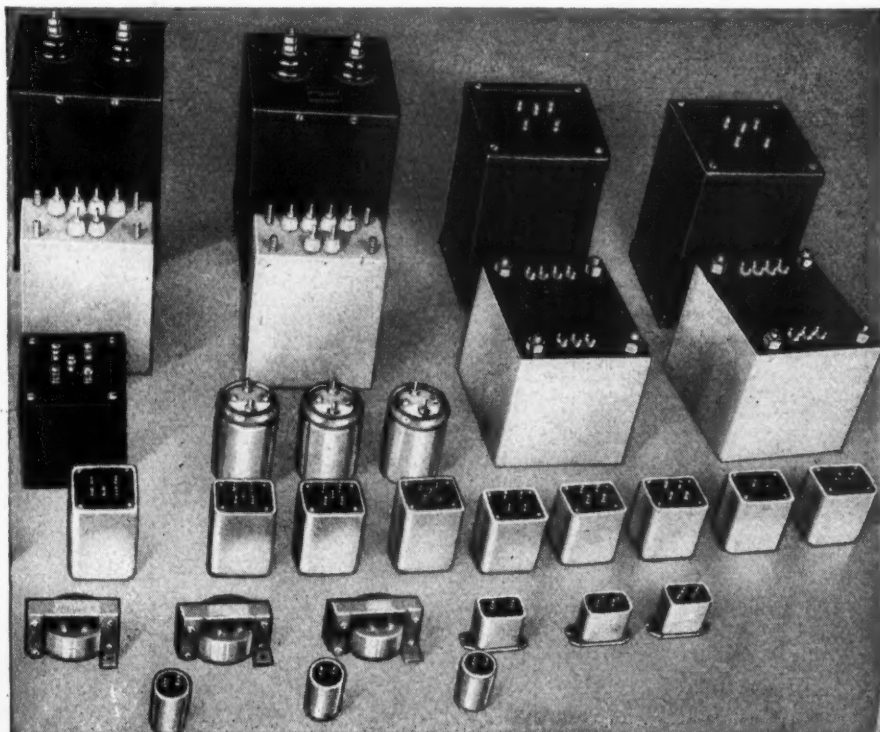

Performance Engineered Electronic Transformers
THE ACME ELECTRIC & MANUFACTURING CO. • CUBA, N. Y. • CLYDE, N. Y.

Acme  Electric

how high is my high?

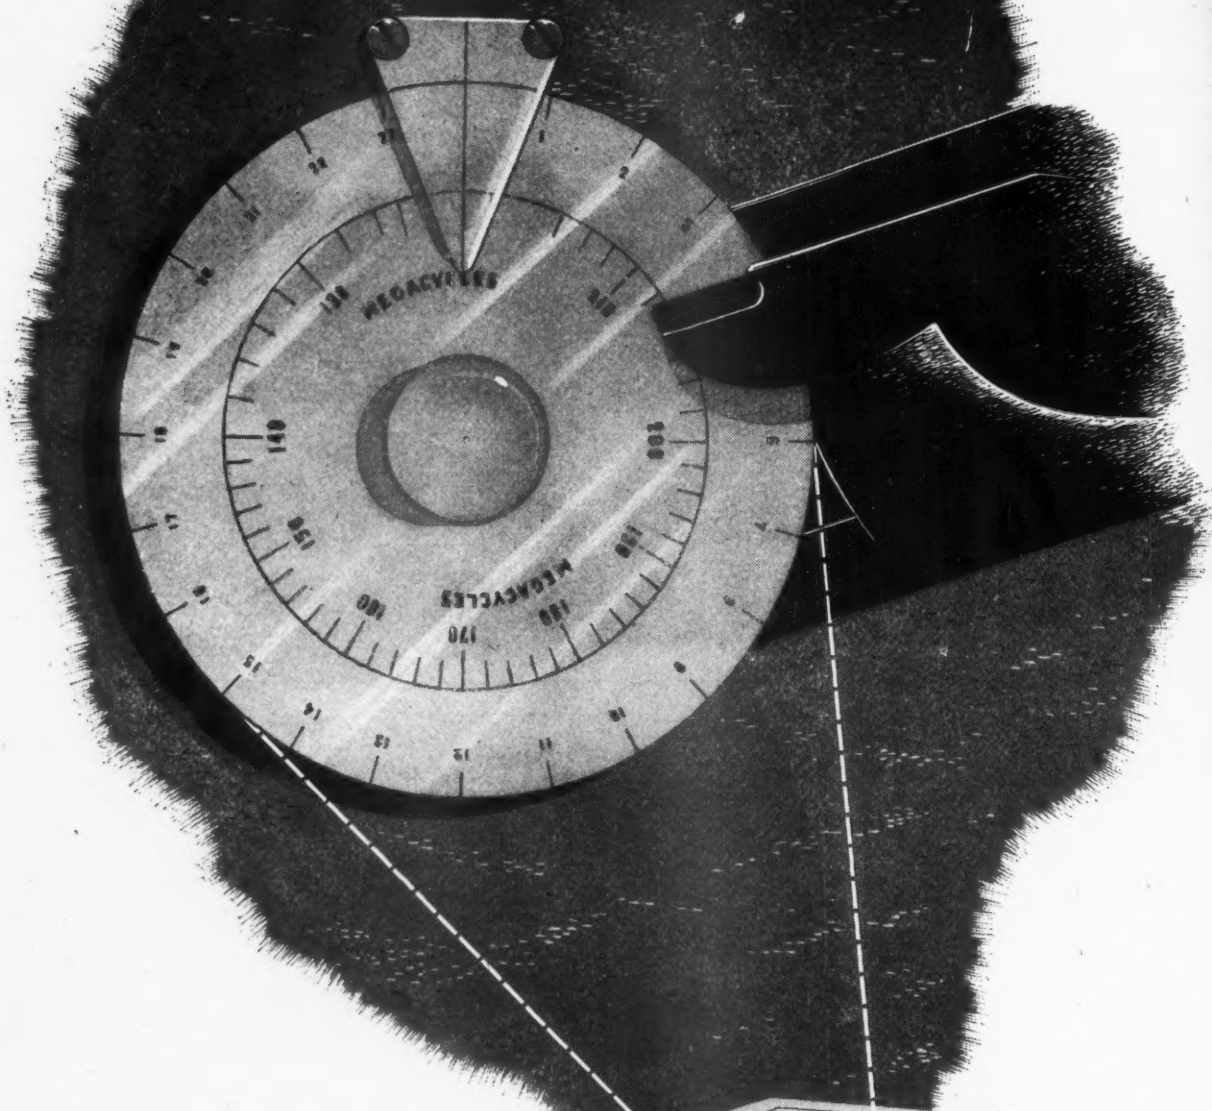

★ Engineers at Hallicrafters are continually striving for new heights of perfection in high frequency development work. The Model S-37 is one example of the progress they have made. This is the first and only set of its kind — covering both AM and FM and operating in the range of 130 to 210 Mc. Two r.f. stages are used and in conjunction with an intermediate frequency of 18 Mc., assure an amazingly high ratio of image rejection. It is becoming a valuable instrument in the hands of all exploring the upper reaches of the high frequency ranges.



Model S-37. The highest frequency range of any continuous tuning commercial type receiver.

hallicrafters RADIO

THE HALLICTRAFTERS CO., MANUFACTURERS OF RADIO AND ELECTRONIC EQUIPMENT, CHICAGO 16, U. S. A.



Buy a War Bond Today!





QUADRUPLLED *Capacity* ... AND THE LAST WORD IN EQUIPMENT...

War expansion quadrupled Formica's capacity both for production and machining of laminated plastics. It brought about the installation of the latest modern equipment, and the revision of procedure throughout the plant.



Now this giant capacity—by far the largest in the industry—this up-to-date equipment, and the trained man power to operate it, is ready for the service of industry in general. It will make possible prompt delivery in quantity—flexible service, a high level of uniformity and accuracy in the material produced.

Among the new features of equipment: vertical treating machines with heat applied by infra-red lights; even cure of thick material by application of high frequency electronic heat; new types of tube rolling machines and many others.

THE FORMICA INSULATION COMPANY
4670 SPRING GROVE AVENUE
CINCINNATI 32, OHIO

FORMICA

3 Views OF THE FUTURE



DUPLEX SPEAKER

The Speaker that
Revolutionizes the
Methods of Sound
Reproduction!

SEND FOR BULLETINS

ALTEC

LANSING CORPORATION

1210 TAFT BLDG., HOLLYWOOD 28, CALIF.

TECHNICANA

[Continued from page 9]

at that value which reduces the plate resistance of the pentode to that of a typical triode. If the feedback exceeds this value "top cut" will occur. There is no limit on the feedback so far as the bass response is concerned, since the bass response is very large for pentodes.

The plate resistance of a tube is reduced by feedback so that $R_p/R_p^1 = 1 + \mu\beta$ where R_p is the plate resistance without feedback and the R_p^1 the plate resistance with feedback, M is the amplification without feedback, and β is the feedback fraction. For a pentode

$R_p = 50,000$ ohms, and the desired value with feedback is 2,000 ohms, typical plate resistance of a triode. For the circuit of Fig. 4, used by the author, $M = 4,000$ and β , calculated from above formula = .006. This permits the calculation of feedback resistor value for R_1 and R_2 .

Voltage feedback can be accomplished from the secondary of the output transformer. In this case the optimum feedback ratio is 1/5, for above values, and a calculated gain of 113.

Excessive feedback can also be controlled by the application of top boost by tone control, or by the introduction of frequency discrimination in the feedback circuit. The author illustrates with sample circuits.

[Continued on page 14]

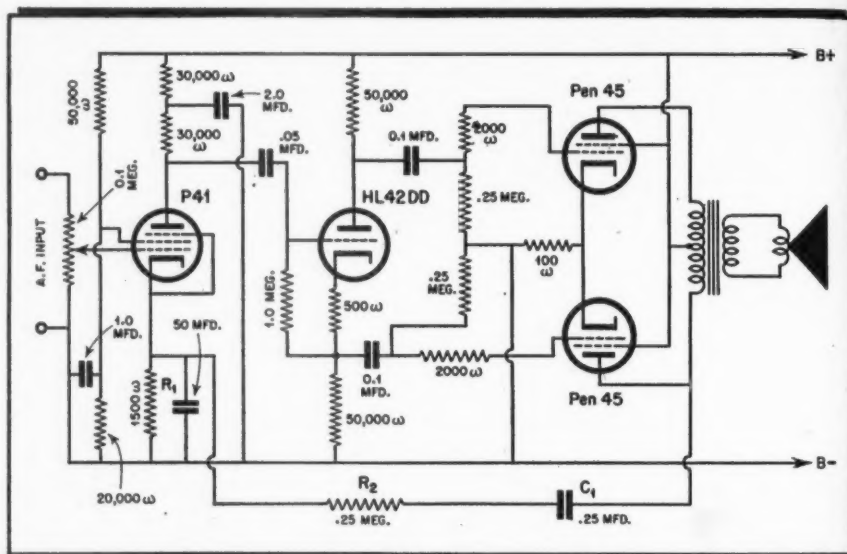


Fig. 4 Negative feedback amplifier


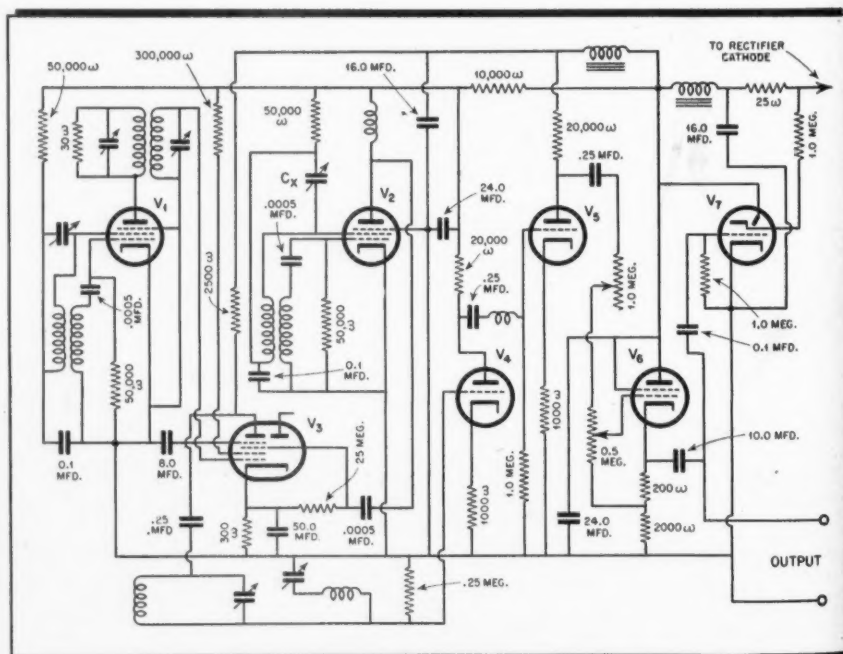


Fig. 5 Audio frequency oscillator

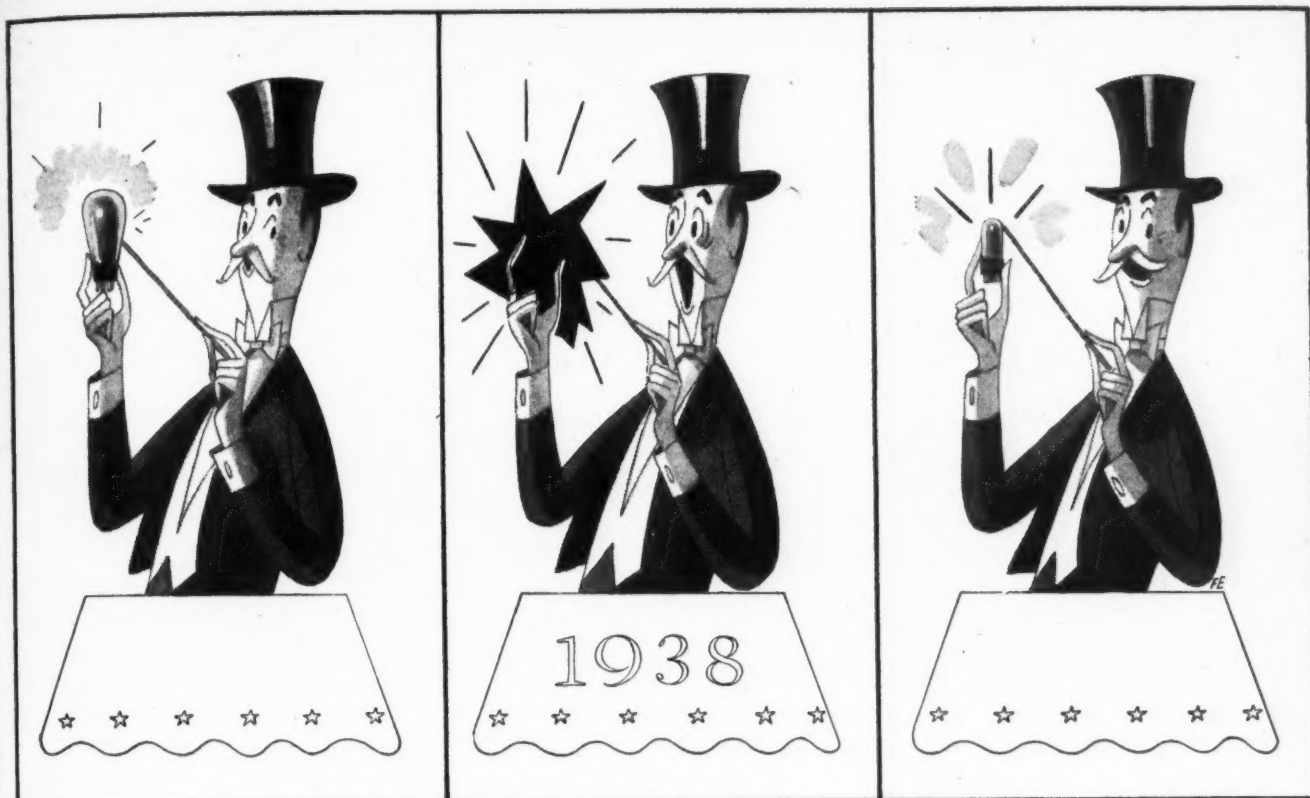

THEY SAID IT COULDN'T BE DONE!

Back in 1938, Hytron began designing new dies and converting production machinery for the first BANTAM GT tubes. The industry said in effect: "You're crazy; it won't work. You can't telescope standard glass tubes to BANTAM size and get the same results." Beam tetrodes, such as the 50L6GT, particularly were considered impossibilities. The intense heat developed during normal operation would warp the elements and crack the small glass bulb.

But Bruce A. Coffin, originator of the BANTAM GT, stuck to his guns. In a few short years, Hytron developed over fifty GT types. The GT became the most popular receiving tube.* Short leads, low capaci-

ties, advantages of shorter bombardment at lower temperatures, ruggedness of compact construction plus both top and bottom mica supports, smaller size, standardized envelopes and bases — all contributed to that popularity.

The BANTAM GT permitted new space economies in pre-war receivers. Only its universal acceptance as standard by all manufacturers makes possible fulfillment of the Services' demands for receiving tubes. In increasing numbers, as this war draws to its ultimate conclusion, Hytron will continue to supply you with the popular BANTAM GT tubes which everyone said just couldn't be made.

*1941 industry production figures: GT—52,000,000; metal—27,000,000; standard glass, G, and local—56,000,000.



OLDEST EXCLUSIVE MANUFACTURER OF RADIO RECEIVING TUBES
HYTRON
 SALEM AND NEWBURYPORT, MASS.



BUY ANOTHER WAR BOND

Basic Design

makes the difference!

Smudge-voice

While these two columns read identically, word for word, the smudged column is a visual representation of an acoustical condition when background noise interferes with transmitted speech.

The words may be readable, but effort and concentration are required for accuracy. And so with reproduced sound: with general purpose microphones, articulation is lowered even though ambient noises do not completely override speech. The Electro-Voice Differential is specifically designed to erase interfering background noise. Speech is clean, clear, crisp... unadulterated by stray pickup or distracting background.

Electro-Voice

While these two columns read identically, word for word, the smudged column is a visual representation of an acoustical condition when background noise interferes with transmitted speech.

The words may be readable, but effort and concentration are required for accuracy. And so with reproduced sound: with general purpose microphones, articulation is lowered even though ambient noises do not completely override speech. The Electro-Voice Differential is specifically designed to erase interfering background noise. Speech is clean, clear, crisp... unadulterated by stray pickup or distracting background.



Electro-Voice DIFFERENTIAL MICROPHONES

Electro-Voice engineers have years of experience in the elimination of ambient noise. We designed and developed the now-famous "Lip-Mike," the first successful Differential microphone. Our new Model 205-S for aircraft, railroad, industrial and police applications is another Differential achievement. Soon there will be Electro-Voice Differential microphones for all communication services. Watch for them.

If any of your limited quantity needs can be met by standard model Electro-Voice microphones, with or without minor modifications, contact your local radio parts distributor.



BLOOD DONORS ARE URGENTLY NEEDED... SEE YOUR LOCAL RED CROSS

Electro-Voice MICROPHONES

ELECTRO-VOICE CORPORATION • 1239 SOUTH BEND AVENUE • SOUTH BEND 24, INDIANA

Export Division: 13 East 40th Street, New York 16, N. Y., U. S. A. Cables: Arlab

50

**YEARS OF DEPENDABLE
TRANSFORMER
SERVICE!**

THORDARSON

TRANSFORMER DIVISION
THORDARSON ELECTRIC MFG. CO.
500 WEST HURON STREET, CHICAGO, ILL.

Transformer Specialists Since 1895

... ORIGINATORS OF TRU-FIDELITY AMPLIFIERS

TECHNICANA

[Continued from page 12]

AUDIO FREQUENCY OSCILLATOR

★ A wide band beat frequency oscillator employing electron coupling and making use of a suitable capacity network to cover the entire range from 0 to 15,000 cycles is described in the November 1944 issue of *Electronics Engineering* by C. E. Cooper.

The author points out that there are several considerations in the design of a good beat frequency oscillator:

1. Good output waveform is desired. This means that one of the beating oscillators must be harmonic-free.

2. Frequency drift due to temperature variations must be avoided. If the two oscillators are identical in design, including physical construction, drift can be minimized.

3. Detector distortion must be avoided. When the signal amplitudes are

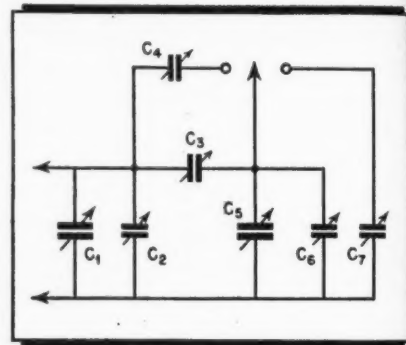


Figure 6

in the ratio of approximately 10-to-1 distortion is less likely.

4. Oscillator frequencies must be properly selected. The author recommends a fixed oscillator frequency of 10 times the highest audio frequency desired as the best compromise. With higher frequencies filtering from the audio beat frequency will be simplified, but temperature drift will be greater. It is also recommended that the variable oscillator operate above the fixed oscillator in frequency.


5. The audio frequency output from the detector should be held constant, by operating at constant variable frequency oscillator output amplitude.

In the circuit shown in Fig. 5 tube V_1 is the fixed frequency oscillator and V_2 the variable frequency oscillator. Oscillations in each are generated by the cathode, grid, and screen electrodes and electron coupled by their respective plates to the detector mixer, V_3 , which is a triode-hexode, the triode section not being used.

[Continued on page 68]

AMPHENOL

... Ready to Contribute
to the Age of Electronics

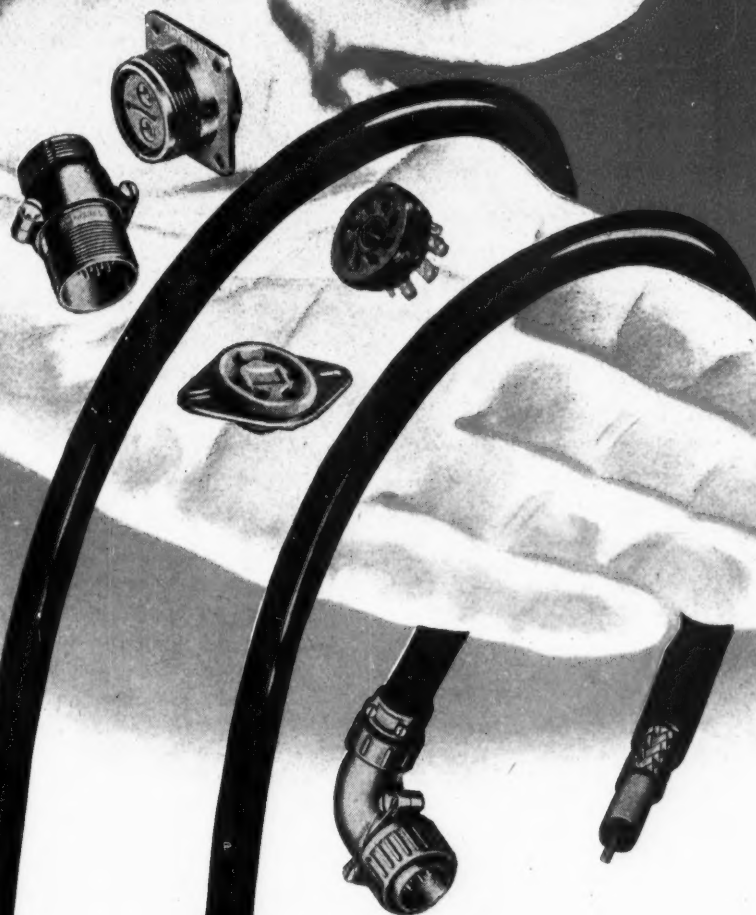

Depend upon

AMPHENOL

Quality

• Amphenol offers highly developed ability to design and produce electrical components of the most critically engineered type. This skill is based on many years of experience in radio since its pioneering stages—now deepened and strengthened by the extreme demands of war production.

Fortunately Amphenol's great capacity is available at a time when the whole science of Electronics is coming into its own. Amphenol is ready to play as big a part in its own phase of the Electronic Industry, as Electronics will play in the post-war world.

AMERICAN PHENOLIC CORPORATION • Chicago 50, Illinois
In Canada • AMPHENOL LIMITED • Toronto

Connectors — AN, British, U. H. F. • Fittings
Conduit • Cable Assemblies • U. H. F. Cable
Radio Parts • Plastics for Industry

An Important Statement

BY MYCALEX CORPORATION OF AMERICA

Issued in an Effort to Clear up and to Avoid Continued Confusion in the Trade

IT has come to our attention that in some quarters electronic engineers and purchasing executives are under the erroneous impression that the MYCALEX CORPORATION OF AMERICA is connected or affiliated with others manufacturing glass-bonded mica insulation, and that genuine "MYCALEX" and products bearing similar names are all "the same thing" . . . are "put out by the same people" . . . and "come from the same plant."

THESE ARE THE FACTS:

- 1** The MYCALEX CORPORATION OF AMERICA is not connected or affiliated with any other firm or corporation manufacturing glass-bonded mica insulating materials. It is 100% American in ownership and operation.
- 2** The word "MYCALEX" is a registered trade-mark owned by MYCALEX CORPORATION OF AMERICA, and identifies glass-bonded mica insulating materials manufactured by MYCALEX CORPORATION OF AMERICA.
- 3** The General Electric Company, by virtue of a non-exclusive license it had under a MYCALEX patent through the MYCALEX (PARENT) COMPANY LTD., has been permitted use of the trade-mark "MYCALEX" on its glass-bonded mica insulating materials.
- 4** The MYCALEX CORPORATION OF AMERICA has behind it over 20 years of research leadership, dating back to work done by the original MYCALEX (PARENT) COMPANY, LTD. of Great Britain, from which it obtained its American patents. MYCALEX CORPORATION OF AMERICA owns U. S. patents and patent applications on improved glass-bonded mica insulation marketed under the trade-mark "MYCALEX."
- 5** The products of MYCALEX CORPORATION OF AMERICA are: (a) "MYCALEX 400"—the most highly perfected form of MYCALEX insulation, approved by the Army and Navy as Grade L-4 insulation. MYCALEX 400 is sold in sheets, rods and fabricated form. (b) "MYCALEX K"—an advanced capacitor dielectric with a dielectric constant of 10 to 15, which can be fabricated to specifications. (c) MOLDED MYCALEX available to specifications in irregular shapes and into which metal inserts may be incorporated.
- 6** "MYCALEX" in the forms described above is made by exclusive formulae and exclusive patented processes. It is utterly impossible for any one other than the MYCALEX CORPORATION OF AMERICA to offer any product, similar in appearance, as "the very same thing."

MYCALEX CORPORATION of AMERICA

"Owners of 'MYCALEX' Patents"

Executive Offices: 30 ROCKEFELLER PLAZA, NEW YORK 20, N. Y.

Plant and General Offices: Clifton, N. J.



Problems in Locating BROADCAST TRANSMITTERS

HAROLD E. ENNES

Station WIRE

**A discussion of the factors involved in choosing the proper location
for a broadcast station**

THE selection of a proper site for radio broadcast transmitting plants is one of the most important engineering problems of the radio field. It is far from being an exact science, and can only be carried out properly by experienced radio engineers. A discussion, however, of the problems involved in the choice of a new transmitter location proves to be of considerable interest, and will be presented briefly in this paper with an analysis of the more fundamental points involved.

Basic Considerations

In contrast to the requirements of the general field of communications, it is the primary objective of a broadcast station to deliver not just an "understandable" signal, but an interference-free and distortionless signal to the receiver. This kind of service is rendered by a station in what is defined as the primary coverage area of the transmitter. Primary service is the result of the ground wave at the surface of the earth, which must have a carrier-to-noise ratio of at least 18 db, and a field strength of at least several times the strength of the sky wave.

The so-called "secondary coverage" area of the transmitter is that area outside the primary service area supplied through the medium of the sky wave, and therefore subject to selective fading and resultant distortion. Since the sky wave (at broadcast frequencies) is almost entirely absorbed during the daytime, the secondary service area of any appreciable importance appears

only at night. Fig. 1 illustrates the attenuation curve of the sky-wave through the sunset period.

The field strength required for satisfactory coverage depends on the interference level which, of course, is dependent upon the orientation and conditions at the receiving point. In general, the interference level is greatest in the business section of large cities, less in the residential areas, still less in small towns and least of all in rural areas.

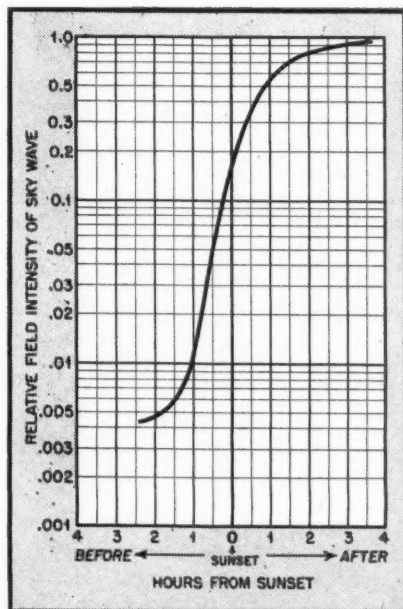


Fig. 1 Attenuation curve of sky wave through the sunset period

Table 1 shows the approximate field strengths necessary for adequate coverage under various conditions. In locations where conditions are more favorable than average, primary coverage will be obtained with weaker field strengths than those indicated in the table, and of course coverage of an intermittent nature prevails at times in localities which experience an hour-to-hour variation of interference intensity.

When it is contemplated to build or move a broadcast station to a new location, an application for approval of the transmitter site must be submitted to the Federal Communications Commission. Included with this report is a map having a scale of not less than one inch to the mile, showing the 250, 25 and 5 mv/m contours and the population residing within the 250 mv/m contour (blanket area). This map must also show by various symbols the proposed location, character of each area (business, manufacturing, residential, etc.), heights of tall buildings or other obstructions, density and distribution of population and location of airports and airways. The desirability of any particular site may be judged primarily by field strength contours which would be produced by a transmitter at that location, considering the population within each contour, and the areas where the signal might be subject to nighttime fading and interference. It is obvious, then, that propagation data that will permit prediction of signal attenuation in all directions from a proposed site is a primary

requisite for choosing a transmitter location.

Ground-Wave Propagation Data

The primary service-area resulting from a transmitter of a given power depends upon earth conductivity, frequency of operation and directivity of the antenna system. The distance at which the ground wave can provide this primary coverage will be affected greatly by the frequency as illustrated in Fig. 2.

The effect of the soil conductivity on the signal attenuation is shown in the graph of Fig. 3. This type of graph, giving the ground-wave field intensity curve plotted against distance for various conductivity values, is published by the FCC. It is plotted for a block of frequencies as shown, and some 20 graphs are necessary to cover the standard broadcast band.

The approximate and average soil conductivity values in the United States are shown on the map of Fig. 4, also published by the FCC. The protected service contours and permissible interference signals on the same channel for various classes of broadcast stations are shown in Table 2. Table 3 shows the permissible interference signals for adjacent channels.

These various curves and tables form the nucleus for coordinating necessary information in selecting the location of a broadcast transmitter.

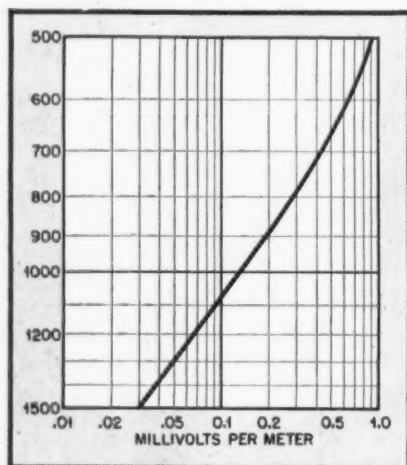


Fig. 2 Ground wave primary coverage

Use of Propagation Data

As an example of the use of the above propagation data, assume that it is desired to find the approximate interference that a 5 kw class 2 station on 980 kc may cause to a 1 kw class 2 station on 990 kc. Also assume that the stations are separated by a distance of 175 miles, and use non-directional antennas of such height as to produce an effective field (for 1kw) of 175

Area	Field Intensity Ground Wave
City business or factory areas	10 to 50 mv/m
City residential areas	2 to 10 mv/m
Rural-all areas during winter or northern areas during summer	0.1 to 0.5 mv/m
Rural-southern areas during summer	0.25 to 1.0 mv/m

—From Standards of Good Engineering Practice: FCC.

Class of station	Class of channel used	Permissible power	Signal intensity contour of area, protected from objectionable interference ¹		Permissible interfering signal on same channel ²	
			Day ³	Night	Day ⁴	Night ⁵
Ia	Clear	50 kw	SC 100 uv/m AC 500 uv/m	Not duplicated	5 uv/m	Not duplicated
Ib	Clear	10 kw to 50 kw	SC 100 uv/m AC 500 uv/m	500 uv/m (50% sky wave)	5 uv/m	25 uv/m
II	Clear	0.25 kw to 50 kw	500 uv/m	2500 uv/m ⁶ (ground wave)	25 uv/m	125 uv/m ⁶
III-A	Regional	1 kw to 5 kw	500 uv/m	250 uv/m (ground wave)	25 uv/m	125 uv/m
III-B	Regional	0.5 to 1 kw night and 5 kw day	500 uv/m	4000 uv/m (ground wave)	25 uv/m	200 uv/m
IV	Local ⁴	0.1 kw to 0.25 kw	500 uv/m	4000 uv/m (ground wave)	25 uv/m	200 uv/m

SC = Same channel.
AC = Adjacent channel.

¹ When it is shown that primary service is rendered by any of the above classes of stations, beyond the normally protected contour, and when primary service to approximately 90% of the population (population served with adequate signal) of the area between the normally protected contour and the contour to which such station actually serves, is not supplied by any other station or stations, the contour to which protection may be afforded in such cases will be determined from the individual merits of the case under consideration. When a station is already limited by interference from other stations to a contour of higher value than that normally protected for its class, this contour shall be the established standard for such station with respect to interference from all other stations.

² For adjacent channels, see Table V.

³ Sky wave field intensity for 10% or more of the time.

⁴ Ground wave.

⁵ These values are with respect to interference from all stations except Class Ib, which stations may cause interference to a field intensity contour of higher value. However, it is recommended that Class II stations be so located that the interference received from Class Ib stations will not exceed these values. If the Class II stations are limited by Class Ib stations to higher values, then such values shall be the established standard with respect to protection from all other stations.

⁶ Class IV stations may also be assigned to regional channels according to Section 3.29.

—From Standards of Good Engineering Practice: FCC.

Channel Separation Between Desired and Undesired Station	Maximum Ground Wave Field Intensity of Undesired Station
10 kc	0.25 mv/m
20 kc	5.0 mv/m
30 kc	25 mv/m

mv/m. From Fig. 4 it is determined that the terrain around each station falls within an estimated conductivity of 6×10^{-14} e.m.u. From Table 2 it is seen that the protection to class 2 during daytime is to the 500 uv/m contour. Since the curves as shown in Fig. 3 are plotted for 100 mv/m at a mile, to find the distance to the 500 uv/m contour of the 1 kw station we determine the distance on the appropriate curve to the

$$\frac{100 \times 500}{175} = 285$$

285 uv/m contour. Thus we may observe from the graph of Fig. 3 and the curve marked 6 (for 6×10^{-14} e.m.u.), that the estimated radius of the service area of the 1 kw station is about 40 miles. Since $175 - 40 = 135$, we have 135 miles for the interfering signal to travel. Again from the appropriate

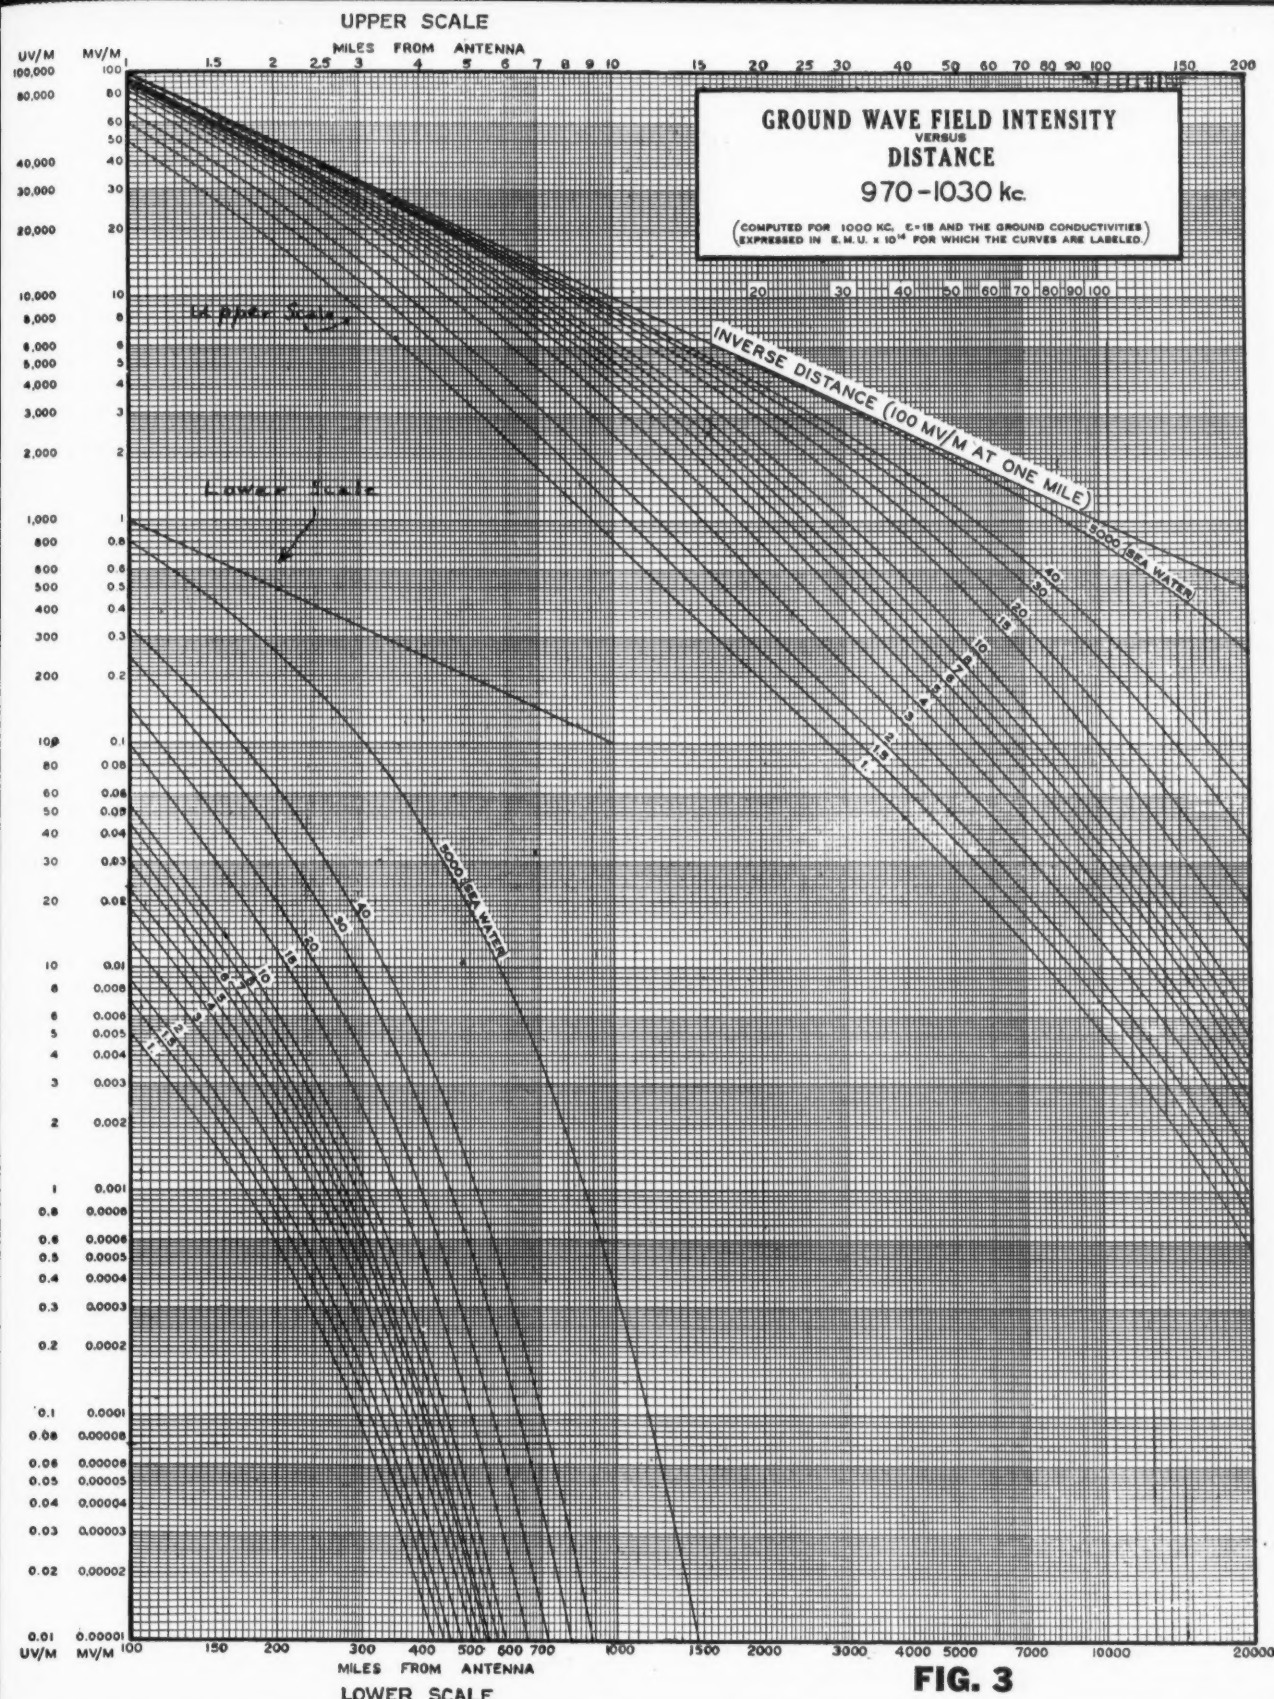


FIG. 3

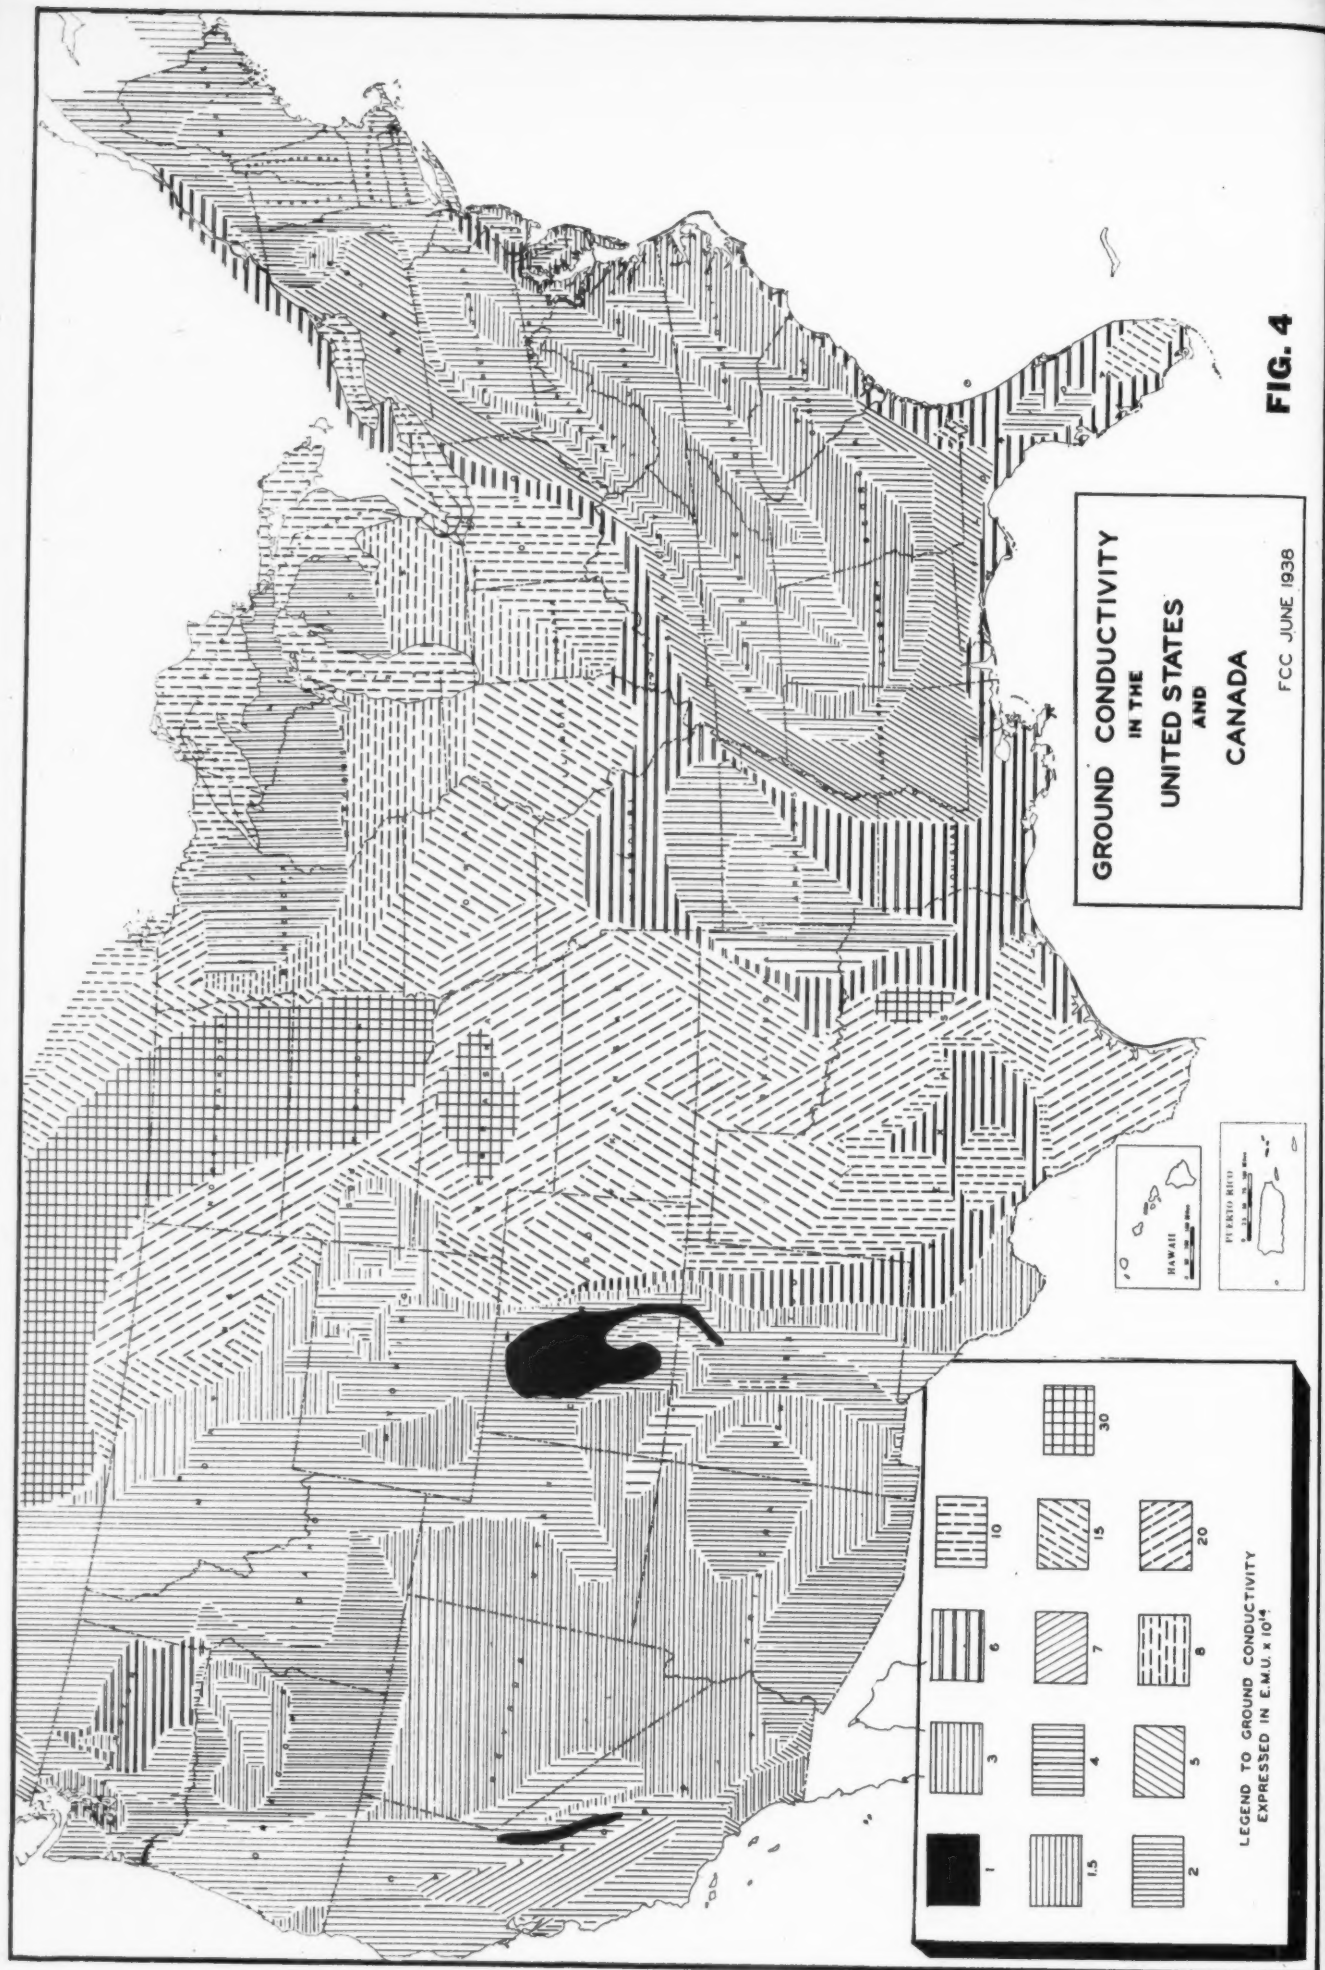


FIG. 4

curve
from
would
separa
it is
may
out a
FCC.

The
when
desire
the d
the ti
is 10
then
on th
the p
be us
curve

Other

In
ulated
that
ground
the ac
to en
such
apart
up of
cont
is the
ing th
in m
comp
broad
the a
the f
trans

Alt
anten
tenua
ground
tors m
site
condu
desira
certain
direct
used
the c
mitter
east
high
preva
locate
where
power
where
apt to
becau
locali
receiv
tivity
other
system
instal
of lo
full r
plain
is in

curve of Fig. 3 we find that the signal from the 5 kw station at 135 miles would be 62.5 $\mu\text{v}/\text{m}$. The stations are separated by 10 kc and from Table 3 it is observed that the undesired signal may have a value up to 250 $\mu\text{v}/\text{m}$ without a declaration of interference by the FCC.

The above principles do not apply when a sky-wave signal for the undesired station is in excess of 5 times the desired signal for 10% or more of the time when the frequency separation is 10 kc. If this condition prevails, then the interference must be estimated on the basis of the sky wave also, and the propagation curve of Fig. 5 must be used rather than the ground-wave curves of Fig. 3.

Other Considerations

In actual practice, in cities and populated areas, the effective conductivity that must be used in determining ground-wave propagation is less than the actual conductivity of the earth due to energy losses in buildings framework such as exist in business, industrial and apartment-house districts. The setting up of a test transmitter and plotting the contours of the resultant field strengths is the most reliable means of determining the effective conductivity, although in most instances today this may be computed effectively by means of broadcast stations already existing in the area and converting the results to the frequency of the proposed new transmitter.

Although it is well known that high antenna efficiency and low signal attenuation result from a site where high ground conductivity prevails, other factors may determine that a less desirable site from the standpoint of ground conductivity might actually be far more desirable to achieve good coverage in certain localities. If, for example, a directional antenna system must be used to cut down on the signal west of the city to be served, then the transmitter should obviously not be located east of the city regardless of a much higher ground conductivity that might prevail there. It is also inadvisable to locate the transmitter in old sections where a great amount of overhead power and telephone lines exist and where house wiring and plumbing is apt to be old and outmoded. This is so because high signal intensities in these localities cause cross modulation in the receiver due to the non-linear conductivity between contacts of wiring and other conductors such as plumbing systems. The FCC will not allow installation of a transmitter in this type of locality unless the station assumes full responsibility of adjusting all complaints. Since this type of interference is independent of receiver selectivity,

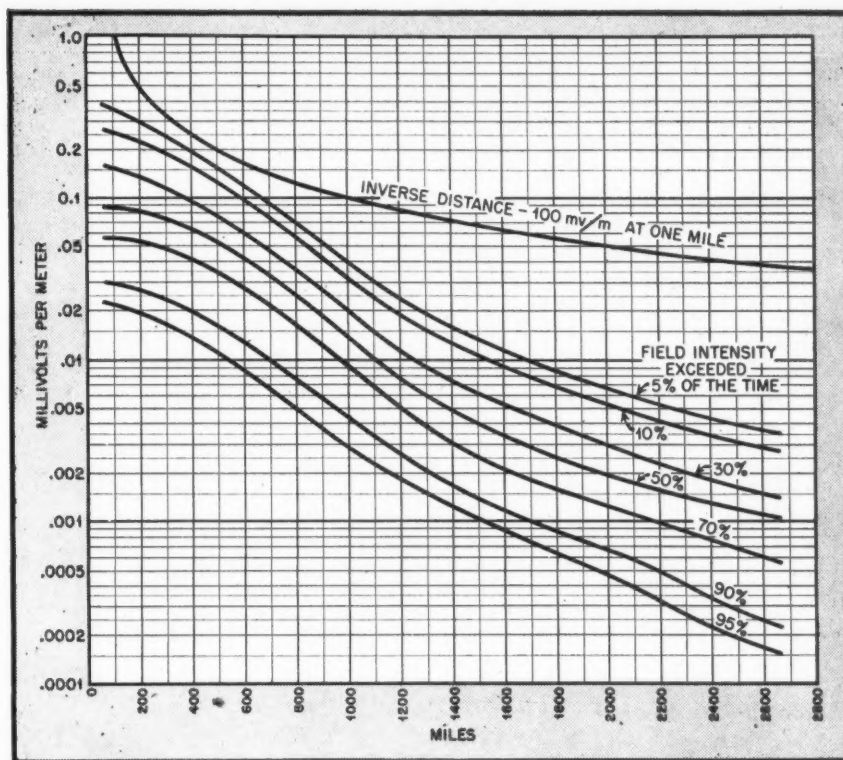


Fig. 5 Propagation curves of sky wave

it can usually be eliminated only by correction of the poor conditions causing the trouble. Consequently, it is apparent that an expense of several thousand dollars might be incurred by a licensee locating a transmitter in this type of locality. Other considerations in the choice of a site are:

1. Location of airports and airways.
2. Availability of power sources.
3. Availability of telephone and program circuits.
4. Flood levels.
5. Accessibility of building.
6. Acreage of land available and cost of same.

Table 4 has been offered by the FCC as a general guide to be used in determining the approximate site of a broadcast transmitter. It is seen that at low powers in larger cities it is advisable to locate the transmitter as near the center of the area to be served as possible. When this is necessary, the building selected should be large enough to accommodate an adequate ground or counterpoise system. It is also well to keep in mind that the height of the building should not be near a quarter-wavelength of the op-
[Continued on page 70]

TABLE 4
BROADCAST TRANSMITTER DATA

Power of Station	Population of City or Metropolitan Area	Approximate Radius of Blanket Area 250 mv/m** (Miles)	Site-Distance From Center of City. (Business or Geographical) (Miles)	Maximum Percentage of Total Population in Blanket Area (Percent)
100 watts	5,000 - 50,000	0.15	1	1
100 watts	50,000 or more	.15	*	—
250-500 watts	5,000 - 150,000	0.3 - .5	1-3	1
250-500 watts	150,000 or more	.3 - .5	*	—
1 kilowatt	5,000 - 200,000	.6 - .9	2-5	1
1 kilowatt	200,000 or more	.6 - .9	*	—
5-10 kilowatts	All	1.5 - 2.5	5-10	1
25-50 kilowatts	All	3.0 - 4.5	10-15	1

*In these instances it is usually necessary to locate the station within the city in order to render satisfactory service.

**These radii are only approximate

and the actual blanket area (area within the 250 mv/m contour) may be materially different.

Factors Involved in Choosing Insulation

P. H. ALBERT

An analysis of the properties of dielectric materials, how their characteristics are affected by various operating conditions, and suggestions regarding their selection to meet specific requirements

SUITABILITY of an insulating material is not determined by any one isolated factor, but by a series of factors intimately related.

Since it is impossible to select an insulation correct for any possible set of conditions, certain guideposts must be established to aid the radio designer in the proper selection of material.

Among the qualities which can determine a material's usefulness are three broad qualities: dielectric, physical, and mechanical. Each of these headings is exceptionally and purposely broad, so that further elaboration is necessary.

Properties

The dielectric properties of a material are those responses to an electrical stimulus of either alternating or direct current. They include, among others, the dielectric strength, the insulation resistance, the dielectric constant, the dissipation or power factor, and the arc resistance.

The physical properties are defined in terms of the mechanical stresses the material will accept, the mechanical or structural response to certain ambient conditions, and its reaction to heat and burning. The mechanical properties are limited to the ability to be formed by molding, machining, or other manu-

facturing operations.

Basically, the mechanical and physical properties of a material would appear to be sidelights on the more important properties of the material's dielectric behavior, since it is ultimately intended as a dielectric. However, other limitations of the material in terms of the mechanical and physical shortcomings often limit its final utility.

The multiplicity of electrical condi-

tions which an insulating material can be expected to meet causes an almost immediate grouping of such materials into low-loss materials and medium-loss materials. Further considerations can compel a distinction between a solid, gas, or liquid dielectric.

The important dielectric properties are the following:

Dielectric Strength
Insulation Resistance

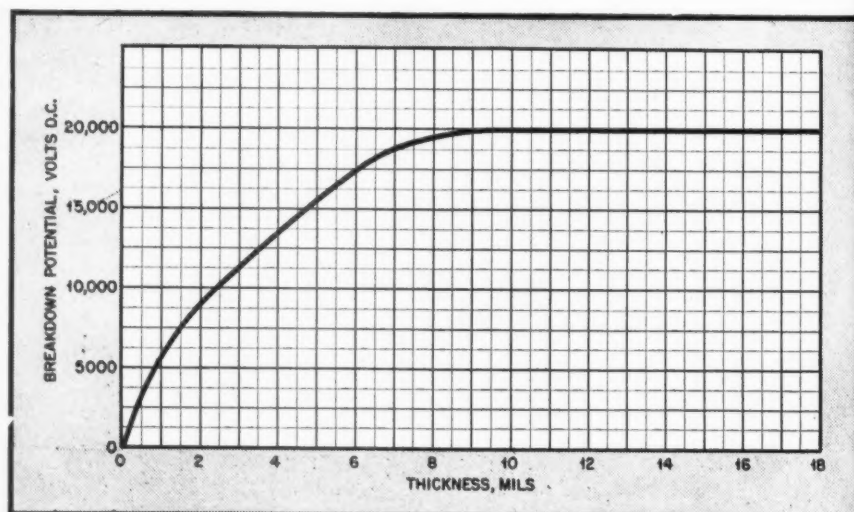


Fig. 1 Breakdown potential is a function of thickness

INSULATING MATERIALS

*Dielectric Constant
Dissipation or Power Factor
Arc Resistance*

Dielectric Strength

The dielectric strength is defined as the maximum permissible voltage gradient without the electrical failure of the material. From a testing source, arbitrary data is developed which represents the average of a number of puncture tests, with the results expressed in volts per mil. Such data is arbitrary in the sense that it is a laboratory approach to actual operating conditions.

Several factors influence the dielectric strength as a mathematical and real quality: size and shape of electrode, thickness of material, frequency applied, method of application (short vs. step-by-step), relative ambient conditions of humidity, temperature, and pressure, and the time of application, among others.

The size of the electrode is a factor for several reasons. As the size becomes smaller, i.e., pin point in nature, the voltage stress becomes focused on a smaller area, causing in many cases a more rapid deterioration of the dielectric medium. The second factor is the inclusion of conducting particles in most dielectric media. As the space occupied by the electrodes increases, there is more possibility that a conducting particle will appear in the voltage path. If such particles recur infrequently and can be eliminated in quality control testing, the test cannot be considered indicative of the material's behavior under true operating conditions.

The shape of the electrode imposes other restrictions on the usefulness of such data obtained. It has already been pointed out that the shape will tend to focus the voltage stress if the electrode is pin-pointed. At the same time, a rectangular electrode will present

certain edge effect problems. This problem can be defined in terms of the necessity for maintaining a uniform field during the stress testing.

Two equally different influences obtain in the response of a material of different thicknesses to dielectric stress. When a material becomes increasingly thin, the conducting particles discussed previously have more effect than in a thicker section. After the thickness of the material is sufficiently greater than the thickness of any combination of conducting particles, the separate condition obtains that the dielectric strength (expressed in volts per mil) decreases with thickness.

Fig. 1 shows an idealized approach to the problem of predicting dielectric strength as a function of thickness. Certain formulae have been developed in the literature to explain mathematically this variation, but no formula has been found to be applicable to any given number of materials, even assuming certain arbitrary constants.


The state of the art of dielectrics is perhaps the clue to the inability to put into mathematical expression dielectric strength as a function of thickness. The additional unknowns which enter into such measurements also prohibit such an idealized formula.

As a whole, the electrical industry has learned to analyze the insulation problem with clarity. The capacitor and transformer industry, as a whole, discard one insulation thickness in considering the proper dielectric stress which can be safely applied to an insulation. At first glance this appears to be a safety factor added because of the instability of certain insulations; actually, it is part of the awareness of foreign materials in even the best dielectrics.

Test Factors

Important also are the method and time of testing. These are important

Fig. 2. Breakdown as a function of time

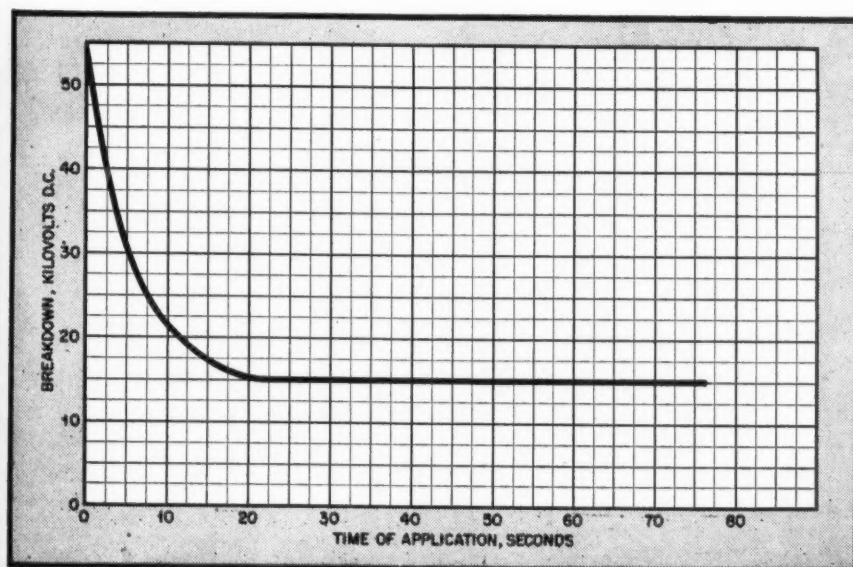

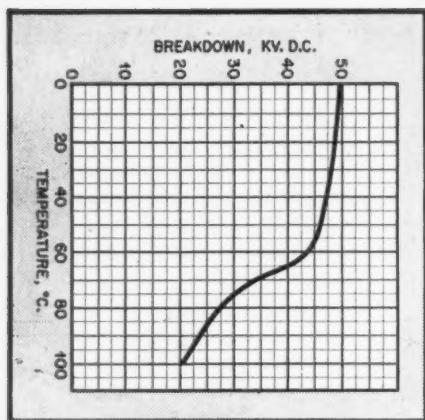


Fig. 3 Breakdown as a function of temperature. (Organic-base material)

because they are analogous to mechanical tests such as when shear testing is compared to loaded shear testing or to some other material properties. It has been found electrically, as well as mechanically, that a continuously loaded specimen will fail at a much sooner point than a specimen placed under shock conditions. Table One shows the step-by-step (loaded ratings of certain insulating materials compared with the short time (shock) ratings of the same materials.

Perhaps, it could be pointed out that the loaded condition is more indicative of the material's eventual behavior than any shock condition of testing—although the latter is useful in predicting the material's behavior under dielectric surge stress conditions.

Any such curve as will show the time-breakdown relationship of an insulation will tend to level off at the steady state voltage stress. Such a curve, as produced in Fig. 2, shows that there is the expected exponential relationship between time of application and voltage breakdown.

Several other influences should be noted in analyzing the dielectric

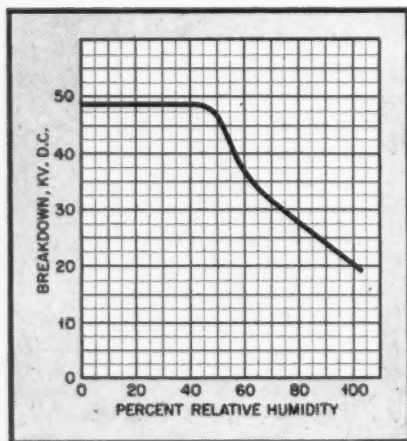


Fig. 4 Breakdown as a function of humidity

strength of a material: ambient conditions of temperature, humidity, and pressure. Curves illustrating the effect of temperature and humidity are presented in Figs 3 and 4, respectively. No data is presented on the effect of altitude, since the data in connection with typical insulating materials is limited.

Temperature, as an influence in dielectric behavior, is perhaps the most serious single deteriorating effect. Whatever the source of the temperature increase, be it internal or external, the end results are the weakening of the material's chemical structure to some degree, carbonization or complete deterioration if the temperature rise is sufficient.

Moisture as a damaging influence on electrical insulation arises from two sources: absorption and formation of a water coating. Since the former is part of the phenomena of dielectric strength and acts as a series of conducting particles through the electrical medium, it is the form of moisture most important in this discussion.

That moisture and pressure decrease the effective surface creepage conditions is another dielectric phenomena, unrelated to dielectric strength, per se. It is known that the failure of electrical insulation can manifest itself into two ways: puncture or flashover. Decrease of the effective surface path will result in the latter type of dielectric failure.

Variation of the insulation resistance under a number of ambient conditions is also a governing influence on insulation. Insulation resistance, as the term is commonly employed, consists of the volume-resistivity and the effective surface resistance. Since the two are inseparably related, it is virtually impossible to reduce the effect of the other.

The conditions of temperature and of humidity effect the true insulation resistance of a material. It is understood that the voltage strength also has an effect, but this quantity has not been reported subjectively as yet. The temperature resistance characteristics of typical polyvinyl chloride wire insulation and typical capacitor mineral oil behavior are presented in Fig. 5; humidity effects on the insulation resistance of the former is presented in Fig. 6.

Since these conditions exist, radio design must include a "fudge factor" for the worst possible set of conditions of temperature, humidity, and pressure. To predict such a fudge factor will involve a complete knowledge of the circuit's application and of the material to be employed.

The former properties can be considered indicative of the insulating properties of a material; the proper-

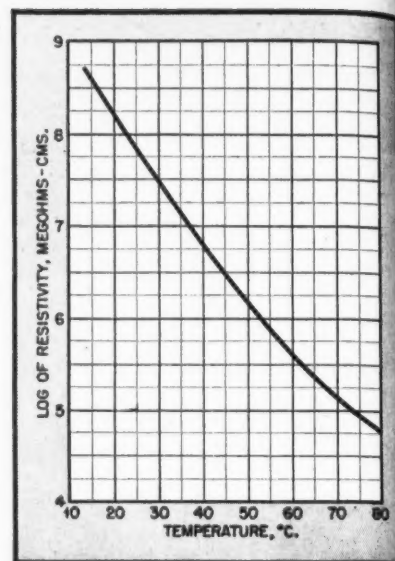


Fig. 5 Temperature insulation resistance characteristics of polyvinyl chloride

ties to be discussed can be considered indicative of the dielectric properties of a material. These properties include the dielectric constant, the dissipation or power factor, and the dielectric loss factor.

Dielectric Constant

Dielectric constant is commonly defined as the quality which determines the maximum change a dielectric will accept per unit volume. This constant is expressed as a ratio using air's dielectric constant as 1. Completely related to the dielectric constant is the dissipation or power factor. Fig. 7 shows the mathematical relationship of these factors.

It is interesting to note that these two factors, i.e., the dissipation factor and the power factor differ less than .0005 when the dissipation factor is less than 0.1. This results mathematically from the fact that the cotangent of the phase angle and the cosine of the same angle are approximately the same.

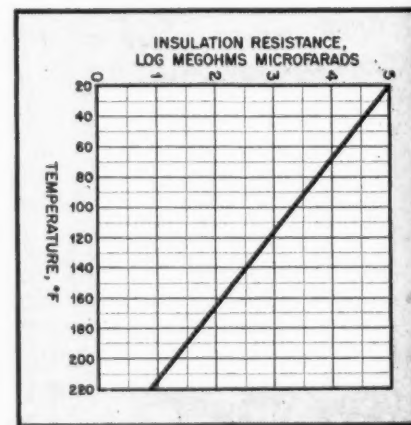


Fig. 6 Insulation resistance-temperature characteristics of mineral oil capacitors from American War Standard C75.16)

The product of the dielectric constant and of the dissipation factor is called the dielectric loss factor. It is the direct measure of the watts loss in a material, as related by the following formula:

$$P = cG^2etf$$

where P = power loss in watts
 c = constant of measurement
 G = voltage gradient
 e = dielectric constant
 t = dissipation factor
 f = frequency

It is generally and correctly assumed that heat is the end point of all insulation. The AIEE has set up certain codes which define the ability of an insulation to withstand high temperatures. These high temperatures are damaging whether the heat is internally produced or externally reproduced. Here the difference between a low loss material and a high loss material enters our considerations. For low frequency, usage such as power or audio frequencies, the electrical loss factor, as expressed by the dielectric loss factor, can be relatively high. For high and ultra high frequencies, the loss must be consistently low. Certain ceramic and plastic forms with loss factors less than .016 measured at 1 megacycle have been deemed suitable.

Again, certain ambient conditions will affect the life of an insulation by deleteriously affecting the dielectric loss factor. Some of these conditions include, as before, temperature, moisture content, frequency, and magnitude of the applied voltage. Since it becomes impossible to reproduce curves showing dielectric behavior under any combination of conditions, Fig. 8 selects a typical liquid impregnant and shows its dielectric behavior with temperature.

It should be noted that conventional insulation materials have a wide variation in dielectric response. This accounts for restricted uses of many of these materials.

Arc Resistance

One remaining dielectric property remains: arc resistance. This quality is defined as the ability of a surface of an insulating material to withstand surges of high current density.

Several materials can be accepted as having high arc resistance. Ceramics and melamines in general are quite useful in these applications.

It has been suggested that certain physical or mechanical properties of a material can make the insulation unuseable, although it has desirable electrical properties.

Analogous to the dielectric strength of a material are certain other physical qualities which define the pressure

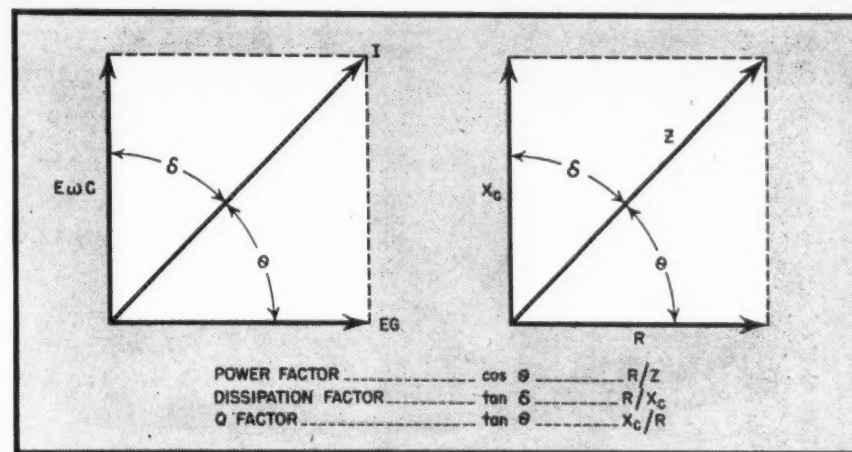


Fig. 7. Vector relationships of a parallel circuit of a capacitor and its impedance relationships

gradient a material will accept. Several strengths are variously related, but differ to the extent that each load is differently applied.

Consider tensile, shear, compression, and impact strength as qualities of a typical material. These and such other factors as hardness, resiliency, and abrasion resistance are indicative of a material's response to mechanical loading. Not all materials, obviously, can be expected to possess the ability to respond exceptionally well in all types of mechanical loading.

The tensile strength of a material represents the "stretch" a material will accept. The compression strength is the converse. Rubber used for electrical wire insulation must be "stretchable," i.e., must have a high tensile strength; rubber used for standoff insulation, vibration insulation, or for gasketing must be compressible.

Impact strength, as defined, represents the shock condition of a force

applied against a material. It differs from shear strength in that it is not a calibrated opposing force applied tangent but a force of a dropped body.

Other physical considerations include the heat range of an individual material, the moisture absorption, and resistance to selected solvents. These should be weighed in the selection of a material, although no extended consideration is to be given to these properties in this article.

Finally, the mechanical properties of forming must be considered: What types of molds can be used? What types of molding processes can be employed? Will the end product be machinable? Can the material be held to close tolerances consistent with its size and shape? What types of shapes can be produced? These questions present themselves every time a material must be selected. Further consideration of these problems in relation to individual materials will be given at a later date.


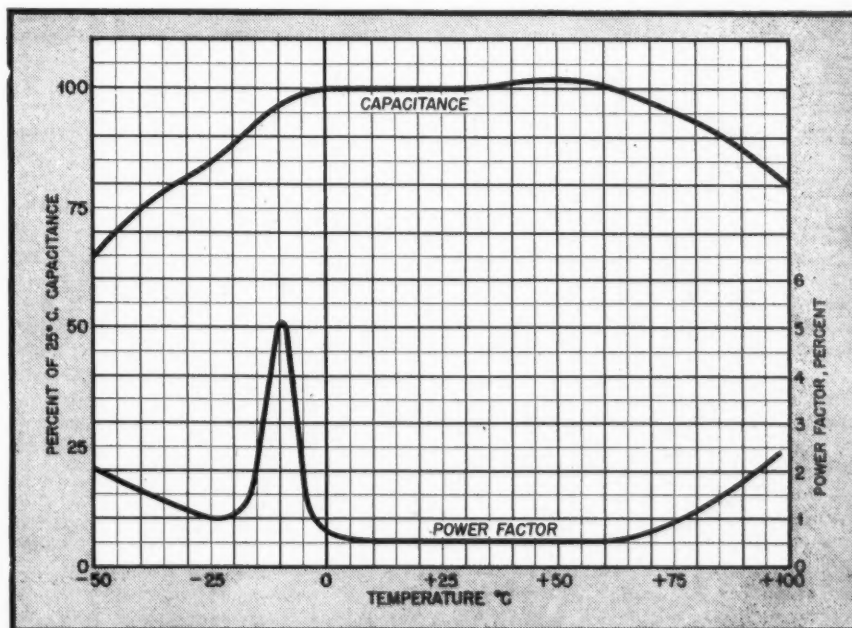


Fig. 8. Variation of dielectric constant (capacitance) and power factor at various temperatures, using a typical capacitor impregnant

• BRIDGING LOSS BETWEEN IMPEDANCES •




Copyright 1945, RADIO MAGAZINES INC., New York, N.Y.

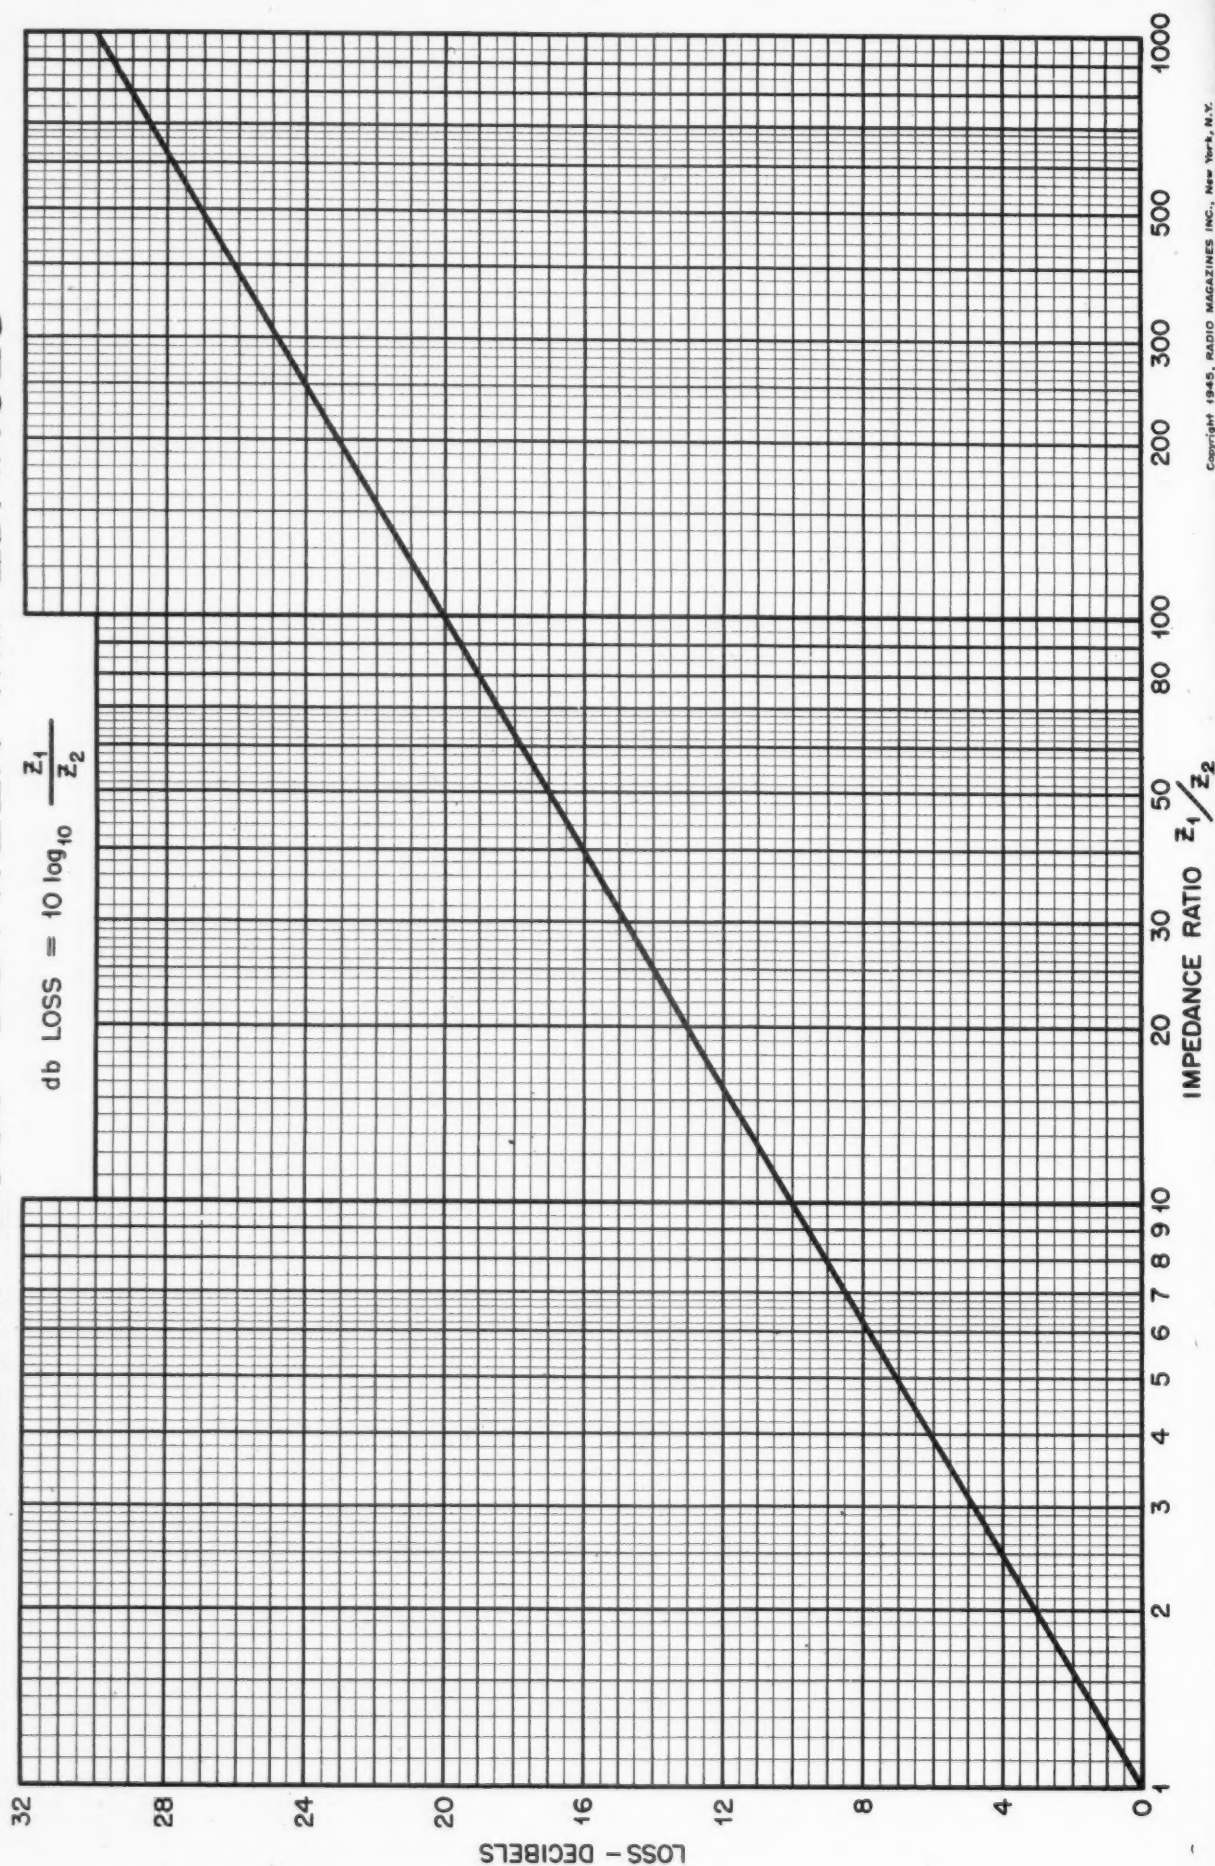

An Unbalanced Bridge RC OSCILLATOR

E. M. McCORMICK
Fort Lauderdale, Fla.

A new type of resistance-capacity oscillator covering frequencies from 0.8 to 860,000 cycles

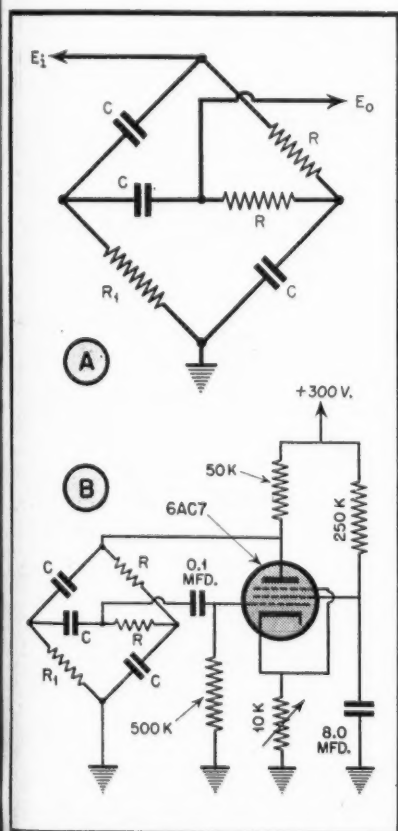

If the output of a single stage amplifier is shifted 180° and fed back to the input, oscillations will be maintained provided the overall gain is greater than one.

There are several types of selective networks using condensers and resistors for obtaining this phase shift. One of these has the elements arranged

in an unbalanced bridge, as shown in Fig. 1a. E_i is the input voltage to the network and is taken directly from the plate of the tube. E_o is the output voltage which is fed to the grid of the stage through the usual RC circuit. In the case to be considered here, the condensers are all of the same value C , two resistors have the same value C ,


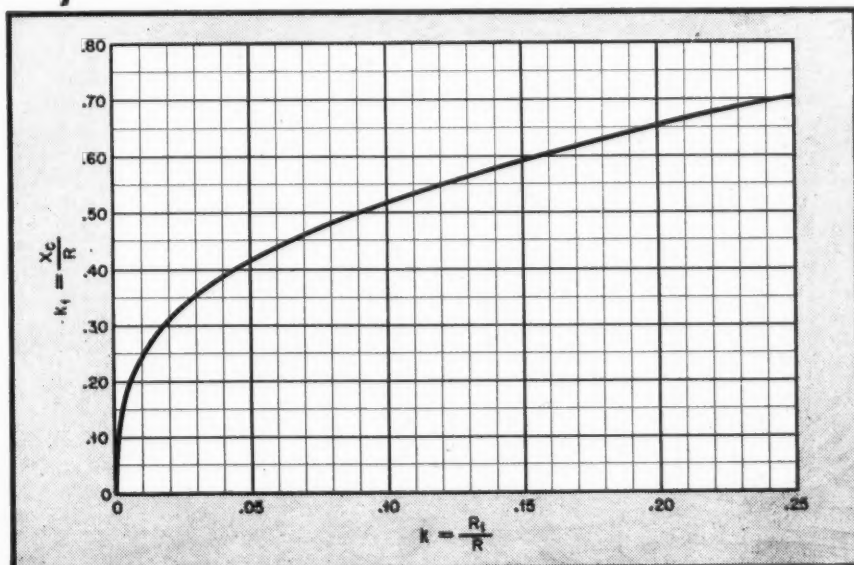


Fig. 2. The value k_1 is plotted for different values of k

FIG. 5

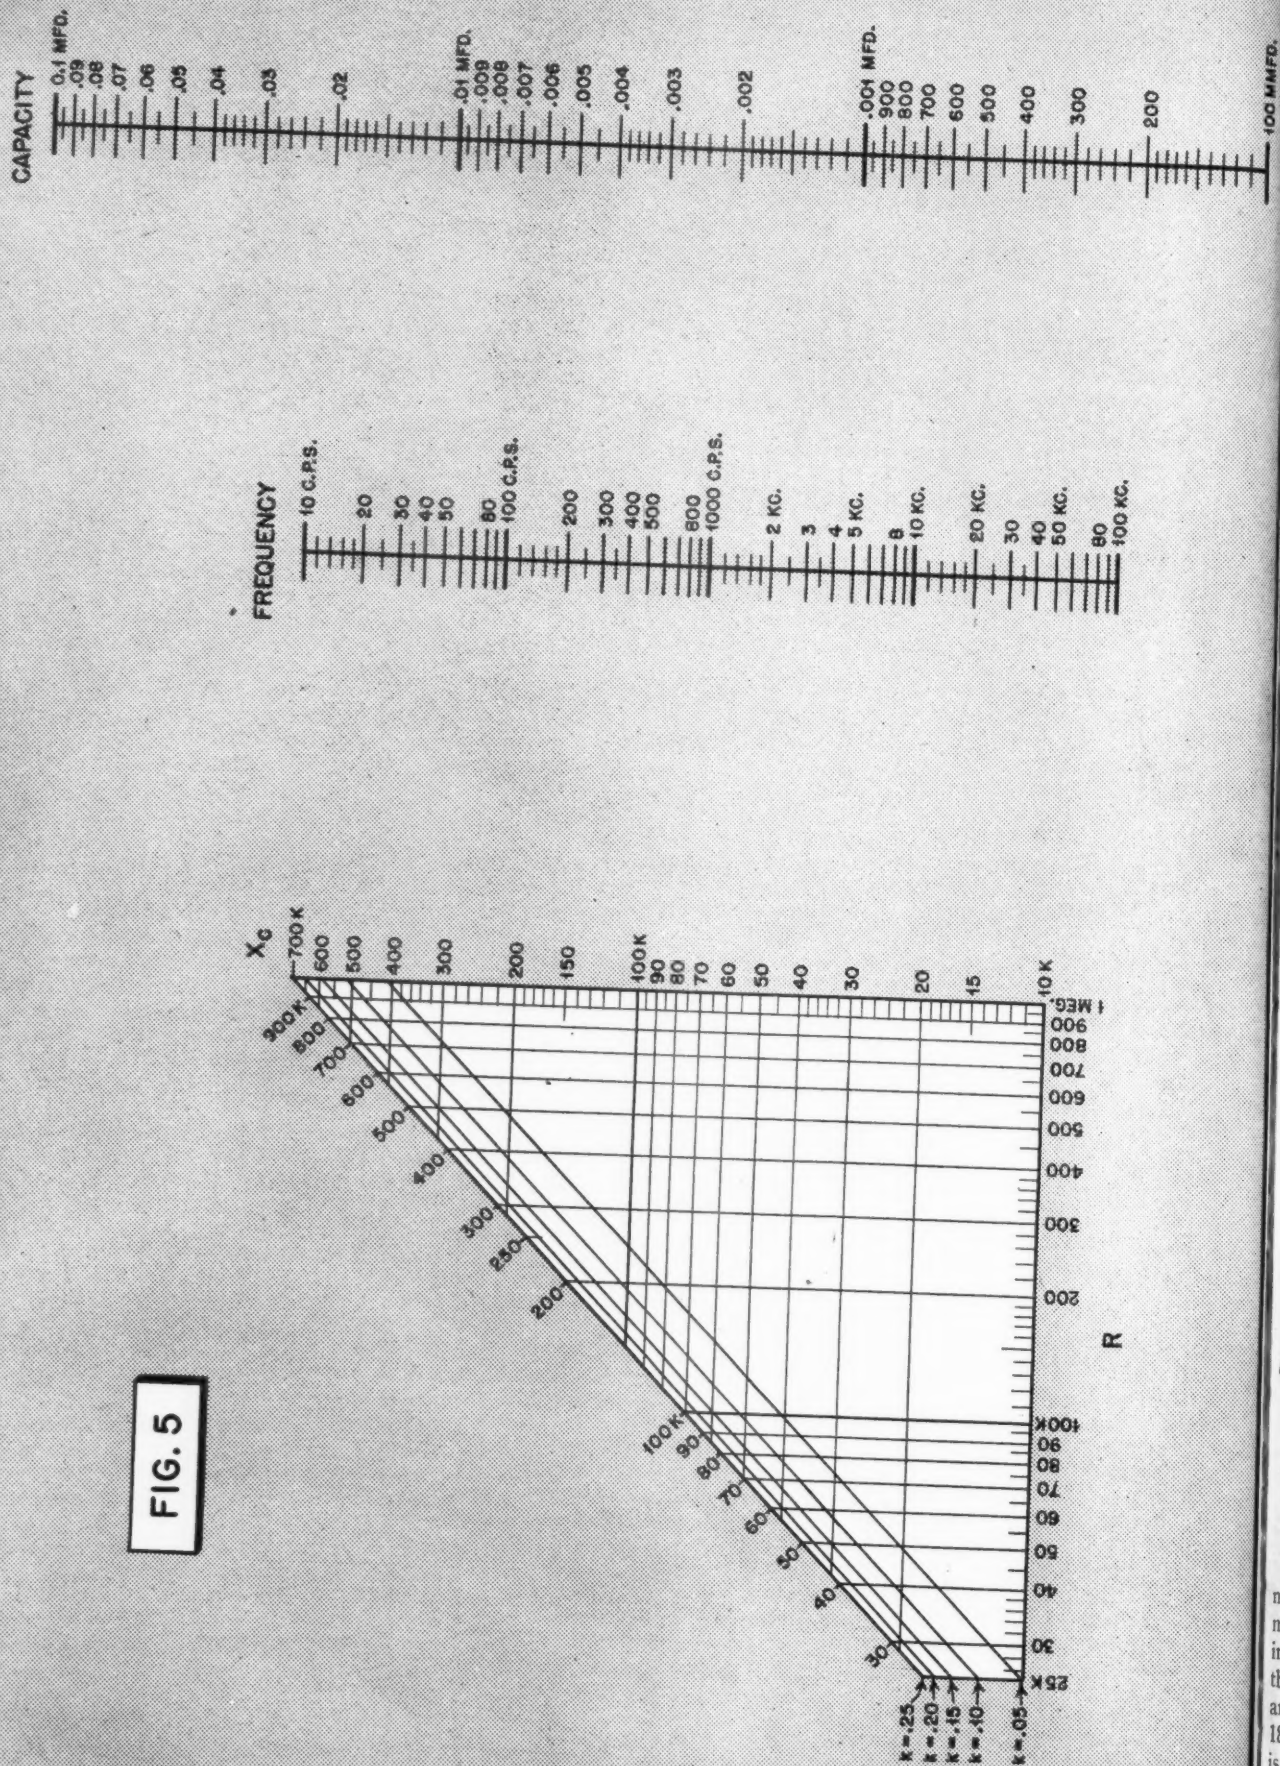

while the third resistor R_1 is the variable element.

Characteristics

An oscillator using such a network to control its frequency is quite stable and produces a good sine wave. The attenuation is reasonable. When $R_1 = .05R$ the ratio of E_o to E_i is 6.43%. This means that a gain of 15.6 is necessary to overcome this loss.

When the three condensers are all the same size the value of X_c for 180° phase shift is independent of the value of the condensers. Thus the best way to control the frequency of oscillations is to change C as with a three section ganged condenser. The frequency will be inversely proportional to capacitance. Thus frequency variations of 10 to 1 can be obtained. It will be noted when using this method that one section of the condenser must have no common connection with the others. The size of R_1 also controls the frequency, however, variations of about 2 to 1 can be obtained. Furthermore the attenuation of the network varies with R_1 necessitating constant readjustment of the gain. R_1 can be used as a fine frequency control. As such it could be used to set the minimum frequency of an oscillator to any specific value within reason without impairing the ratio of frequencies available. R_1 is usually a rheostat that is not altered after the initial adjustments.

The following are defined for convenience in working with the network:

$$k = \frac{R_1}{R} \dots\dots\dots (1)$$

$$k_1 = \frac{X_c}{R}, \text{ where } X_c = \frac{1}{2\pi fC} \dots\dots\dots (2)$$

$$\rho = \frac{E_o}{E_i} \dots\dots\dots (3)$$

$$\rho = \frac{M(M+P) + N(N+Q) - j(MQ-NP)}{(M+P)^2 + (N+Q)^2} \dots\dots\dots (4)$$

$$M = (2k^2 - 1)k \dots\dots\dots (5)$$

$$N = (2k - k^2)k_1 \dots\dots\dots (6)$$

$$P = 3k^2 \dots\dots\dots (7)$$

$$Q = (2k + 1)k_1 \dots\dots\dots (8)$$

For 180° phase shift two conditions must be met. First, the real part of (4) must be negative and, second, the imaginary part must be zero. From the first condition we find that $M < 0$ and $N < 0$. Therefore there can be no 180° phase shift unless the following is true.

$$k < .25 \dots\dots\dots (9)$$

$$MQ - NP = 0 \dots\dots\dots (10)$$

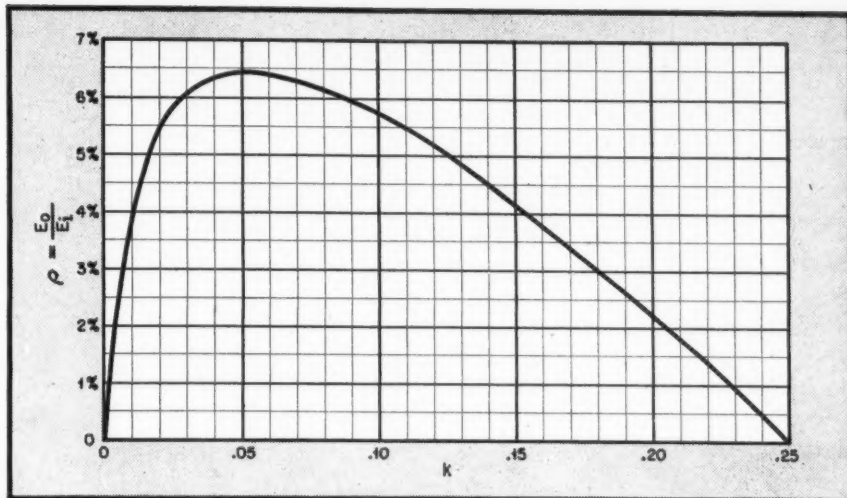


Fig. 4 Plot of the ratio Z_i/R for various values of k

$$k_1^4 - \frac{4}{3}k(1-k)k_1^2 - \frac{1}{3}k(2k+1) = 0 \dots\dots\dots (11)$$

$$k_1^2 = \frac{2}{3}k(1-k) + \frac{1}{3}\sqrt{3k+10k^2-4k^4} \dots\dots\dots (12)$$

In Fig. 2, k_1 is plotted for different values of k .

To facilitate the calculation of ρ , P is assumed to be $\gg M$ and $Q \gg N$. Therefore, the real part of (4) reduces to $\frac{N}{Q} = \frac{2k-k_1^2}{2k+1} \dots\dots\dots (13)$

This equation has been plotted in Fig. 3. From that graph it is seen that there is no feedback when $k = .00$ and when $k = .25$. The maximum feedback is obtained when $k = .05$. It is best to operate with k between .05 and .25 for two reasons. First, greater stability is obtained when k is large. This can be seen in Fig. 2. The slope of the curve indicates the change in k_1 and subsequently in frequency for a given change in k . This slope is reasonably flat in the region mentioned. Thus drift due to temperature variations are

minimized. The second reason is apparent from Fig. 4. In this figure the ratio of Z_i to R is plotted as k_2 . Z_i is the impedance of the network as seen by the plate of the stage. When k is less than .05 the value of k_2 falls off rapidly. This means that the oscillator would be loaded down reducing the effective gain of the stage.

Nomograph

A nomograph, Fig. 5, is provided for solving oscillator networks of this type. Two examples will explain its use. First, assume that it is desired to build an oscillator to operate at 1000 cps using .001 μ fd condensers. With a ruler connect the .01 μ fd point on the Capacity line with the 1000 cps point on the Frequency line. The intersection of the ruler with the X_c line determines the latter to be 157 K where K is 1,000 ohms. From this point follow left horizontally to the slanting lines representing different values of k . Choose some reasonable value of R that will also necessitate the use of a larger value of k as pointed out above. Tak-

[Continued on page 70]

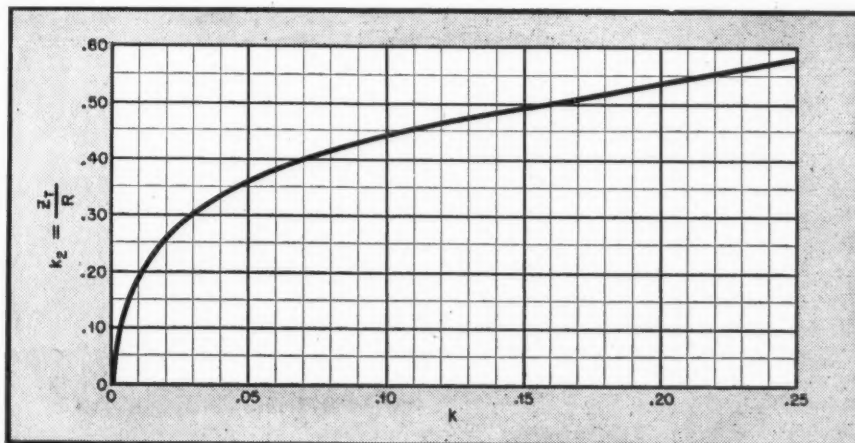


Fig. 3. Plot of the function ρ for various values of k

Preparing Component Specifications

A. C. MATTHEWS

THE design of electronic equipment is not confined to electrical and mechanical development work. After the first sample has been completed electrically and mechanically it is then necessary to write specifications for the component parts.

It has been said, "If one unit can be built, a million can be built". This is true provided the specifications of the components making up the unit are so well written that production parts will all fit and work together as well or nearly as well as the engineering sample. It is one thing to write rigid specifications without regard to cost, wherein every conceivable condition of operation is taken into account, and another to write specifications where only the necessary characteristics and tolerances are specified. The latter requires considerable experience and a sound knowledge of electrical and mechanical engineering, as well as considerable production experience. The importance of this phase of engineering is not fully realized by many engineers. Specifications that are too exacting, as mentioned previously, unnecessarily increase the cost of the product but, on the other hand, specifications which are not sufficiently complete often result in inferior material being received. Obviously, incorrect components can cause considerable production difficulties and result in high labor costs as well as wasting materials.

In this article some general recommendations will be made for the specification of component parts and examples given of typical errors. After specifications have been completed and sample components are received for approval, it is usually the duty of the engineering department to inspect or measure these samples to ascertain whether they will fulfill the requirements for the job. It is extremely important that all of the information given on the drawing or specification of the sample component be carefully checked before approval. Not only should the

TABLE 1

SPECIFICATION CHECK LIST								
INDUCTORS — TRANSFORMERS								
SPECIFY	SPEAKERS	LOOP	CHOKES		TRANSFORMERS			
	ANTENNA		R-F	AUDIO	R-F	I-F	A-I	POWER
Inductance and Tolerance— Each winding and tap.		X	X	X	X	X	X	X
Coupling Factor or Mutual- Spacing between coils					X	X	X	
Q or Figure of Merit @—KC. Shielded, unshielded		X	X		X	X		
Inductance with —ma d-c, and volts a-c @—cycles	X			X			X	
Distributed or Capacity between windings		X	X		X		X	
Wire Size and Insulation	X	X	X	X	X	X	X	X
Rated Volts &/or Current	X			X				X
Voltage Breakdown—Corona				X				X
Leakage Resistance—Humidity Between windings or to case	X			X	X	X	X	X
R-F Two Frequency Spec.					X			
Type Winding—Universal, bank, layer, random	X	X	X	X	X	X	X	X
Powdered Iron Core Type					X	X		
Laminated Iron—Type, Size				X			X	X
Core Loss & Excitation Current								X
Turns Ratio							X	X
Temperature Rise	X			X				X
Mechanical Hum or Buzz	X			X				X
Electrostatic Shield					X			X
Resistance of Windings	X			X			X	X
Voice Coil Z and Phasing	X							
Frequency Response	X						X	
Flux in Gap & Magnet Size	X							
Hermatic Seal or Impregnation	X	X	X	X	X	X	X	X
Mounting Type & Dimensions Lugs, leads, studs, bolts	X	X	X	X	X	X	X	X
Shield or Case Type-Material, mounting and dimensions		X		X	X	X	X	X
Exterior Finish	X	X		X	X	X	X	X
Underwriters' Requirements	X	X	X	X	X	X	X	X
Identification Code	X	X	X	X	X	X	X	X

Specifications

NEWS An analysis of methods of presenting design and test specifications for radio components to be used in production.

TABLE 2

CAPACITORS SPECIFICATION CHECK LIST							
SPECIFY	VARIABLE			FIXED			ELECTROLYTIC Wet / Dry
	Air	Mica	Ceramic	Paper	Mica	Ceramic	
	(Trimmers)						
Capacity & Tolerance	X	X	X	X	X	X	X
Q or Power Factor (Normal, after humidity)	X	X	X	X	X	X	X
Drift Characteristic—(Temp, aging, retrace)	X	X	X		X	X	
Leakage Resistance — (Normal, after humidity)				X	X	X	X
Reactance at — KC.	X	X	X	X	X	X	X
Temperature Range & Max. Operating Temperature				X	X	X	X
Working, Surge or Breakdown Voltage—Altitude, corona	X	X	X	X	X	X	X
Housing—(Metal, cardboard, molded, ceramic, hermetic seal)				X	X	X	X
Exterior Finish—Plating, wax, paint, fungus resisting	X	X	X	X	X	X	X
Mounting & Dimensions—Lugs, leads, bushings, clamps, bolts	X	X	X	X	X	X	X
Maximum Dimensions	X	X	X	X	X	X	X
Dielectric & Treatment	X	X	X	X	X	X	
Rotation & Torque	X	X	X				
Capacity Curve vs. % Rotation	X	X	X				
Section Matching & Tolerance	X						
Plate Type—Shaped, formed, etched, plain	X						X
Microphonics	X	X					
Life Test—Cycles rotation	X						
Shaft, Bearings, Wipers	X						
Maximum Current at —kc.	X	X	X	X	X	X	X
Ripple Current (Max.)							X
Leakage Current							X
Identification &/or Color Code	X	X	X	X	X	X	X

components be measured and inspected in every detail, but they should actually be substituted in a working model of the product in which they will eventually become a part. Such a procedure will often uncover some overlooked difficulty, and necessitate a revision in the specifications which might otherwise be overlooked had the component only been checked against the drawing. A few such cases will certainly impress upon the engineer the importance of detailed specifications and fortunately the trouble can usually be remedied in time to prevent production difficulties.

The measurement and actual use of the samples before approval is therefore nearly as important as the writing of the original specifications.

Specifications

First, let us consider the drawings or specifications. These are usually made on tracing cloth or paper suitable for reproduction. Several methods of reproduction are currently used and each have their advantages and disadvantages which, however, will not be discussed at this time since we are primarily interested in the information appearing on them.

Some drawings merely show one or more views of the part with a specification consisting of a descriptive name followed by the word "Type #—" as made by XYZ Manufacturing Co." Such a specification leaves much to be desired. In the first place, the purchasing department is limited to one source of supply. Furthermore there is little control over the characteristics of the part either electrically or mechanically, and the supplier would be justified in making small changes in an effort to improve his product which might seriously affect its usefulness in a particular design. Being a standard part with the supplier, undoubtedly the "improved version" could be returned, but in the meantime production would be seriously affected and a loss of both time and money would result.

Confusing Specifications

In contrast to the over-simplified specification we have the type that is confusing due to its complexity. This type gives information on all details (which incidentally it should) but in being so meticulously complete the information is given more than once. For instance, an i-f coil is specified as having a certain number of turns of a specific size and type of wire, wound commercial service. This along with other factors such as ambient temperature, humidity, altitude, and in certain cases Underwriters requirements must all be reviewed; keeping in mind that

on a specified form and mounted in a particular type of shield can. The physical spacing between windings as well as the mutual inductance, individual coil Q, inductance, gain under typical operating conditions, selectivity and coupling factor are also given. This type of drawing not only specifies all of the materials to be used but specifies the completed performance as well. While on the surface such a drawing may seem to be the last word in engineering perfection, it leaves much to be desired from the part manufacturers' standpoint. Very few manufacturers have the same facilities for the fabrication of parts; one may have a particular type of winding machine which will handle an equivalent type of wire, but is not adaptable to the exact size specified. The completed transformer, however, can be made to perform in accordance with the electrical specifications if certain unnecessary parameters are disregarded. In order to supply the transformer according to the print it is necessary that new equipment be purchased which, unless the order is quite large, will result in an increased cost.

Such a situation could have been prevented if the designer had only required that the overall performance and the physical dimensions be within specified limits. The information as to raw materials could have been included for reference purposes or they might have been specified along with the note "or equivalent". It is definitely a waste of time, for example, to specify the exact number of turns of wire on a coil and then give the required inductance. One or the other should be sufficient. Likewise, spacing between coils should not be given in inches if the mutual inductance between the same coils is specified. In other words, give only pertinent information or data, together with all allowable tolerances. If it is desired to include extra information or data to aid in the fabrication of the part, state plainly that the information is for reference only or the values are "approximate". This is good engineering practice as it serves as a guide not only to the part manufacturer but to other engineers who might be considering the use of the same component in another design.

Tolerances

Another important item in preparing specifications is the assignment of tolerances. These have a very definite relation to the cost of the part and should be specified with forethought. The fact that a certain type of coil, for example, has previously been used with a tolerance of plus or minus one percent

TABLE 3

RESISTORS	SPECIFICATION CHECK LIST					
	SPECIFY	VARIABLE Comp.	WIRE	Metalized	FIXED Comp.	WIRE POWER TYPE
Resistance and Tolerance		X	X	X	X	X
Resistance curve vs % Rotation		X	X			
Power Dissipation (free air)		X	X	X	X	X
Max. operating volts across unit		X	X	X	X	X
Maximum Operating Temp.		X	X	X	X	X
Voltage Coefficient				X	X	X
Temperature Coefficient				X	X	X
Reactance at —kc.				X	X	X
Life vs. Resistance (overload)				X	X	X
Life vs. Cycles Rotation		X	X			
Noise		X	X	X	X	X
Maximum Physical Dimensions		X	X	X	X	X
Shaft—length, diameter, type		X	X			
Taps and position		X	X			X
Terminals—Leads—Lugs (Ground-insulated)		X	X	X	X	X
Insulated Covering				X	X	X
Degrees Rotation (with or without switch)		X	X			
Salt -water Immersion		X	X	X	X	X
Leakage to Case—Humidity		X	X	X	X	X
Torque—Operating		X	X			
Mounting—(Self leads, ferrule, rod, bushing, locating pins)		X	X	X	X	X
Exterior Finish—(Wax, cement, vitreous, fungus resisting)				X	X	X
Identification or color code		X	X	X	X	X

TABLE 4

SPECIFICATION CHECK LIST						
MISC. COMPONENTS — chiefly insulating materials						
SPECIFY	INSULATED WIRE & CABLES	TERMINAL PANELS	SOCKETS Tube	SWITCHES Toggle	Push Button	Wave Band
Dielectric—Grade & Type	X	X	X		X	X
Impregnation—(Wax, fungus resisting)	X	X	X		X	X
Capacity/Q Ratio at —kc.	X	X	X		X	X
Insulation Resistance— (Internal, surface—humidity)	X	X	X	X	X	X
Voltage Breakdown—(Normal, altitude, humidity)	X	X	X	X	X	X
Salt water Immersion	X	X	X	X	X	X
Maximum Mechanical Dimensions	X	X	X	X	X	X
Mounting—Dimensions (Angles, clip, bushing)		X	X	X	X	X
Degrees Rotation and/or Throw (Snap, momentary, index)				X	X	X
Sections & Positions				X	X	X
Shaft—(Length, diam., thickness)					X	X
Wire Size—(Solid, stranded)	X					

TABLE 5

SPECIFICATION CHECK LIST

METAL PARTS

SPECIFY

MATERIAL—Steel, brass, copper, zinc, bronze, aluminum, alloys.

TYPE—Sheet, rod, tubing, strip, special.

GRADE—Hard, soft, cold or hot rolled, annealed, permeability, special heat treated.

PROTECTIVE COATING—Plating, paint, chemical, fungus resisting.

PROCESS—Electroplate, dip, spray, brush.

DIMENSIONS & TOLERANCES—Fractions, decimals, radii, degrees.

FABRICATION—Cast, machined, stamping, drawing, formed.

DETAILS—Punch formed, extruded, embossed, knurled, finish marks, grain direction, etc.

TEST REQUIREMENTS—Underwriters, salt spray, strength, hardness, etc.

of its inductance does not give the designer the liberty of using the same value. Other factors such as Q , operating frequency, circuit, etc. should be considered. Obviously the greater the tolerance the lower the cost of manufacture, which in turn permits the selling price to be more competitive. Tolerance is certainly not confined to electrical specifications alone. Physical dimensions in fractions or decimals should be carefully considered. Decimal tolerances are more often justified when production of large quantities are involved, where die cost and original set-up charges will be spread over a large number of units. Another reason which might make it profitable to specify a dimension as a decimal quantity is where the saving in labor due to "perfect" fit in an assembly operation would be obtained. In general, labor costs more than raw materials, particularly when skilled or semi-skilled personnel are required to perform the operation.

The intended service, that is, whether intermittent or continuous, has a definite bearing on the writing of speci-

cations. An example of this is the two ratings given to transmitter tubes, viz: (1) ICAS, intermittent commercial and amateur service, (2) CCS, continuous commercial service. This along with other factors such as ambient temperature, humidity, altitude, and in certain cases Underwriters requirements must all be reviewed; keeping in mind that unnecessarily rigid specifications are to be avoided whenever possible.

Measurement methods may vary greatly between manufacturers and this being the case, it is advisable with certain parts to either specify the method preferred, or actually include instructions in the form of a diagram on the part drawing. Such a procedure need only be used when there is a chance of considerable error should an alternative method be used. As an example of this, where the specification of a small mutual inductance is desired it might be well to note "Mutual inductance to be measured on Carey Foster bridge". This should be sufficient since the Carey Foster bridge is well known.

Where it is important, due to the special nature of the design, a complete schematic showing all circuit constants should be included. For example, suppose we have a complex i-f transformer in which we are interested mainly in the shape of the selectivity curve and gain. To specify all of the critical parameters together with allowable tolerances would require a great amount of unnecessary engineering. Fig. 1 shows a typical simplified transformer drawing wherein only the desired characteristics have been specified with tolerances. Obviously such a specification is much more easily understood and followed, since only the overall result is specified without regard to such factors as coil spacings, Q etc. Of course, there may be instances where certain parts used in the construction might vary in such a way that the overall performance was not impaired, yet some undesirable effect might be experienced. An example of such a case is where the effectiveness of a shield can be so poor that magnetic coupling occurs between the coils and other parts of the unit, but the transformer performance as a unit is not affected. Such inconsistencies are rare although they must be considered before writing specifications.

Approved Samples

Some engineering departments make a practice of supplying the part manufacturer with an approved sample as a guide, and cover this with a note on the drawing stating, "In all respects not covered by the specification the purchased part must conform with the en-

(Continued on page 70)

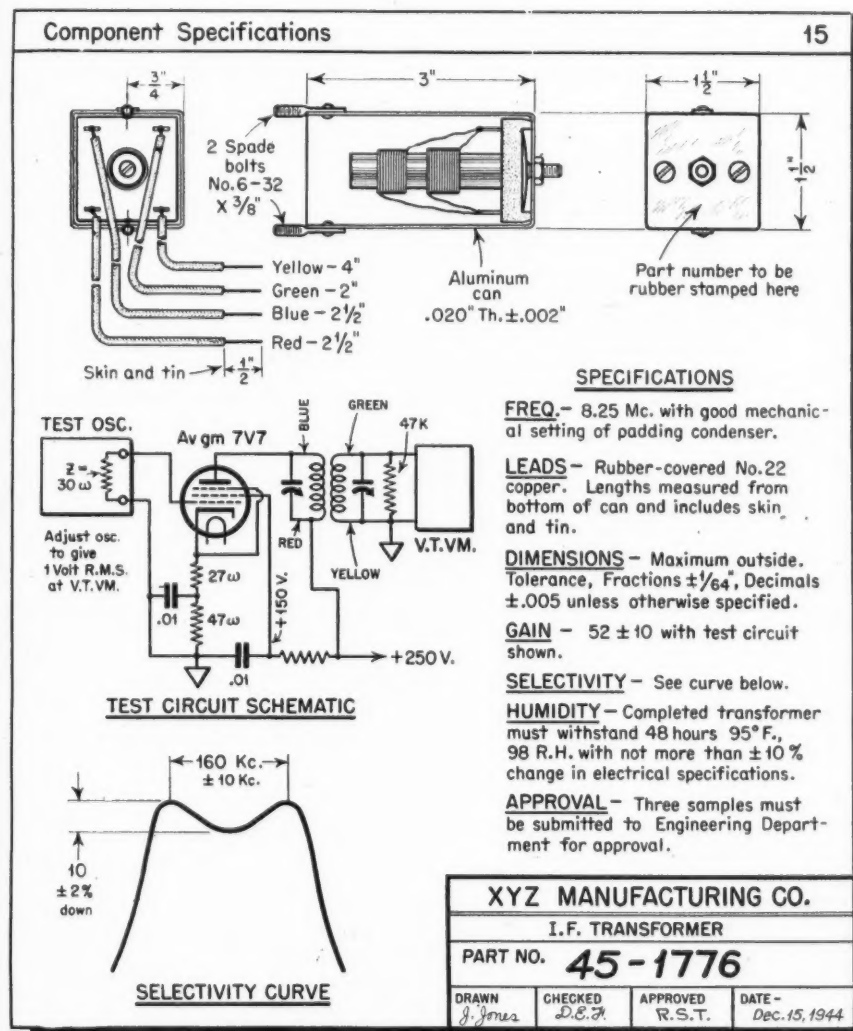


Fig. 1 Representative specification sheet

RADIO BIBLIOGRAPHY

F. X. RETTENMEYER

RCA Victor Division, Radio Corporation of America

17-AIRCRAFT RADIO, PART 5

Phase Synchronization in Directive Antenna Arrays with Particular Application to Radio Range Beacon—F. G. Kear—*Bureau of Standards Jnl. of Research*—Vol. 11, 1933, Page 123.

The Cathode Ray Oscillograph in Radio Research—R. A. Watson Watt, J. F. Herd and L. H. Bainbridge-Bell—*H. M. Stationery Office*—1933.

Note on Theory of Night Errors Adcock Direction Finder System—J. F. Coales—*Jnl. I.E.E.*—Vol. 71, No. 429, June 1932, Page 497.

Variation of Bearings Observed in Short-Wave Direction Finder (on a small rotating frame)—Asukai, M., and Hayasi, T.—*Wireless Engr.*—Vol. 9, March 1933, Page 169.

Piel-Registrierungen des Nachteffekts—M. Dieckmann—*E.N.T.*—Vol. 9, Feb. 1932, Pages 46-48.

Polarization of H.F. Waves and Their Direction Finding—S. Namba, E. Iso and S. Ueno—*Sci. Abs.*—Sec. B., Vol. 35, Jan. 1932, Page 41.

Wireless and Night Flying. The Marconi-Adcock Direction Finder—*Flight*—Vol. 24, Feb. 19, 1932, Pages 154-155.

An Experimental Direction Finding Station—R. Keen—*Wireless World*—Vol. 14, April 2, 1924, Pages 66-71.

Some Radio Direction Finding Observations on Ship and Shore Transmitting Stations—R. L. Smith-Rose—*Jnl. Institution Elec. Engrs.* (London)—Aug. 1924, Page 701.

British Patent 220,029—1924—Robinson et al.

The Effect of Local Conditions on Radio Direction-Finding Installations—R. L. Smith-Rose—*I.E.E. Jnl.*—Vol. 61, Pages 179-191; discussion, Pages 191-196, Jan. 1923.

The Effect of Underground Metal Work on Radio Direction Finders—R. L. Smith-

Rose and R. H. Barfield—*Wireless World and Radio Rev.*—Vol. 11, Nov. 4, 1922, Pages 165-171.

Improvements in Means for Determining the Direction of a Distant Source of Electromagnetic Radiation—F. Adcock—British Patent No. 130,490—1919.

Wireless Directional Finder the Secret of Adcock's Success—*Wireless Age*—August 1919, Page 18.

Instruments and Radio Flying—K. S. Day (Text)—Distributed by Air Associates—Page 81.

Air Traffic Rules—Civil Air Regulations as Amended to May 31, 1938—Part 60, Page 252. Published by U. S. Department of Commerce—Bureau of Air Commerce.

Through the Overcast—A. Jordanoff (Text)—Funk & Wagnalls, 1938, Page 278.

Instrument and Radio Flying—K. S. Day (Text)—Air Associates, 1938, Page 105.

Flightray—*Communications*—Vol. 18, No. 10, Oct. 1938, Page 22.

Practical Use of Radio as a Direct Aid to the Landing Approach in Conditions of Low Visibility—R. S. Blucke—*Royal Aeronautical Society Jnl.*—Vol. 42, June 1938, Page 483.

A Method of Exciting the Aerial System of a Rotating Radio Beacon—H. A. Thomas—*Jnl. I.E.E.*—Vol. 77, 1935, Page 285.

The Night Performance of Marconi-Adcock Direction Finder—S. B. Smith—*Marconi Review*—No. 50, September-October 1934, Page 1.

Marconi Direction Finder, Type DFG 90—*Marconi Review*—No. 48, May-June 1934, Page 1.

Elimination of Phase Shifts Between the Currents in Two Antennas—H. Roder—*I.R.E. Proc.*—1934, Vol. 22, Page 374.

A Radio Compass Development in His Majesty's Signal School—C. E. Horton and C. Crampton—*Jnl. I.E.E.* (London)

—Vol. 73, No. 441, Sept. 1933, Page 284. Cause and Elimination of Night Effects—H. Diamond—*Bur. of Standards Jnl. of Research*—Vol. 10, No. 1, January 1933, Page 7.

The Lorenz Blind Landing System—R. Denman—*Wireless World*—April 5, 1935, Page 332.

Present State in the Arc of Blind Landing of Airplanes Using Ultra-Short Waves in Europe (Lorenz Company's glide-path system)—E. Kramar—*IRE Proceedings*—Vol. 23, #10, Oct. 1935, Page 1171.

A New Field of Application for Ultra Short Waves—E. Kramar—*IRE Proceedings*—Nov. 1933, Page 1519.

Lorenz Blind Landing System—*Wireless World*—April 5, 1933, Page 332.

Automatically Controlled Blind Landing—G. V. Holloman—*SAE Jrn.*—Vol. 42, #6, June 1938, Page 13.

Air Corps Automatic Landing System—*The Reserve Officer*—October 1937, Page 16.

Automatic Hookup Lands Plane Blind—*Aviation*—October 1937, Page 57.

Army Air Corps Radio Blind Landing System Adapted as Standard by Bureau of Air Commerce—*Air Commerce Bulletin*—Vol. 5, No. 6, Page 107.

Progress Reported on New Blind Landing System—Metcalf (MIT)—*Aviation*—Vol. 37, July 1938, Page 40.

Three Spots and a Horn—D. G. Fink—*Aviation*—Vol. 37, #9, Sept. 1938, Page 28.

Instrument and Radio Flying—K. S. Day (Text)—Air Associates, Inc.—1938, Page 237.

Metal Horn Focuses Ultra Short Waves—*Radio and Television*—Vol. 9, No. 6, October 1938, Page 332.

RADIO BIBLIOGRAPHY

Le Guidage par cable et le guidage sans cable des navires et des avions—C. Sourgonnier—*Rev. Gen. De l'Électricité*—Vol. 28, July 5, 1930, Page 19.

Le guidage par Cable Sous-marin, Procède William Loth, est Définitivement au Point—Jean Labadie—*Science et La Vie*—Vol. 37, April 1930, Page 306.

Remarques sur le Guidage Magnetique des Navires—E. Fournier—*Comptes Rendus*—Vol. 189, Oct. 21, 1929, Page 598.

The Field Radiated from Two Horizontal Coils—G. Breit—*Bureau of Standards, Scientific Papers*—#431, March 10, 1922.

Field Locator Makes Travel by Air Safe—*Aerial Age Weekly*—Vol. 15, June 26, 1922, Page 379.

Sur la Solution du Problème de Guidage des Mobiles aeriens par Brume où de Nuit sans Aucune Visibilité—W. Loth—*Comptes Rendus*—Vol. 173, Dec. 1921, Page 1152.

Finding Aircraft Landing Stations by Means of Audio Frequency Receivers—E. C. Hanson—*Aerial Age Weekly*—Vol. 9, May 19, 1919, Page 489.

Landing Aircraft by Sound—*Wireless World*—June 26, 1936, Page 627.

Ear Specialist (Editorial)—*The Sportsman Pilot*—Vol. 15, No. 4, April 1936, Page 16.

An Instrument Landing System—E. N. Dingley—*Communications*—Vol. 18, No. 6, June 1938, Page 7.

Status of Instrument Landing Systems—W. E. Jackson—*IRE Proceedings*—Vol. 26, June 1938, Page 681.

Instrument Landing, Today and Tomorrow—H. W. Roberts—*Aero Digest*—Vol. 32, June 1938, Page 79.

Proposed Blind Landing System (Microwave receivers, distributed over landing field, each starting its own relay-controlled audio-oscillator when excited by highly directional beam from areoplane)—Sorenson—*Aero Digest*—Vol. 30, #5, May 1937, Page 64.

Instrument Landing Systems for Aircraft—H. W. Roberts—*Aero Digest*—October 1936, Page 32.

Coming in to Land—T. Lee—*Western Flying*—July 1936.

A New System for Blind Landing of Airplanes—K. Baumann & A. Ettinger—*IRE Proceedings*—Vol. 24, #5, May 1936, Page 751.

Radio Blind Landing System to Be Installed on Midcontinental Airway—*Air*

Commerce Bulletin—Vol. 15, #8, Feb. 15, 1935, Page 179.

Blind Landing Method for Aircraft—Societe Francaise Radio-Electrique—*Hochfrequenztechnik und Elektroakustik*—Vol. 48, #3, 1936, Page 109. French Patent 799180, Sept. 3, 1935.

Instrument and Radio Flying—E. A. Cutrell—*Aviation*—Vol. 34, June 1935, Page 11.

Blind Approach Prospects—*The Airplane*—Aug. 31, 1935.

Radio Approach System Assists Airmen to Land under Low Ceilings—*Air Commerce Bulletin*—January 15, 1934, Page 165.

Energized Cables Lower Hazards of Fog—*Electric World*—Vol. 99, April 9, 1932, Page 642.

Über ein Elektrisches Verfahren für Flugplatzbergrenzungen zur Erleichterung von Blindlandungen—*Hochfrequenztechnik und Elektroakustik*—Vol. 40, August 1932, Page 41.

Atterrissage Radio-Électrique des Avions en Temps de Brume—L. de la Forge—*QST Francais*—Vol. 12, April 1931, Page 25.

Photocell Beacon to Aid Fog Flying—*Electronics*—Vol. 2, June 1931, Page 695.

Flying an Airplane in Fog—Doolittle—*SAE Jrnl.*—March 1930, Page 318.

Pamphlets by the Guggenheim Foundation for Aeronautics; Solving the Problem of Fog Flying, October 1929—Equipment Used in Experiments to Solve the Problem of Fog Flying, March 1930.

Localized Radio Landing Signals for Airplanes—*Radio Service Bulletin* #60—April 1, 1922, Page 14.

Radio Tells Aircraft Altitude—*Aerial Age Weekly*—15, May 22, 1922, Page 258.

The Field Radiated from Two Horizontal Coils—Gregory Breit—*Bureau of Standards Scientific Paper* No. 431, 1922.

U. S. Patent #1,898,474—Loop Antenna—filed June 26, 1919.

U. S. Patent #1,555,345—Aircraft Landing System—Filed January 19, 1929.

Blind Landing Aids, Electrical Engineers' Handbook—Pender and McIlwain (*Communication and Electronics*) Page 16.

The New Radio Controlled Automatic Pilot—*The Aeroplane*—Feb. 23, 1938, Page 230.

Automatic Homing—*Flight*—Feb. 24, 1938, Page 181.

Instrument and Radio Flying—K. S. Day—(Text)—Dist. by Air Associates, Page 50.

A Directional-Reading Radio—Wave Reflection—Type Absolute Altimeter for Aeronautics—Sadahir Matsuo—*IRE Proceedings*—July 1938, Page 848.

The Acoustic Altimeter—Delsasso—*Science*—Vol. 85, May 28, 1937, Page 10.

A Research of Direct-Reading Altimeter for Aeronautical Use by Radio Wave Reflection—S. Matsuo—*I.E.E. Japan Jrnl.*—Vol. 56, (2) No. 571, Feb. 1936, Page 89.

The Application of Radio Technique to the Acoustical Aircraft Altimeter (Dubois-Laboureur System)—Van Steenberg—*The Radio Centrum*—Vol. 2, Jan. 24 and 31, 1936, Page 45 (Dutch).

A Study of The Direct-Reading Absolute Altimeter for Aeronautics by the Radio Wave Reflection Method—S. Matsuo—*Report of Radio Research in Japan*—Vol. 6, #1, May 1936, Page 10 (Abstracts).

Messgenauigkeit des Behmlothes für Flugzeuge bei geringen Flughöhen—E. Schreiber—*D.V.L. Report* #205, Z.F.M.—Vol. 22, No. 3, 1931, Page 77—*D.V.L. Yearbook*—1931, Page 591.

The Behn Acoustic Sound for Airplanes with Reference to its Accuracy—E. Schreiber—*T.M.* No. 588, *N.A.C.A.* 1930.

Landing Indicator for Airplanes—*Radio Engineering*—Vol. 10, April 1930, Page 47.

Height of Airplanes Above the Ground by Radio Echo—E. F. Alexanderson—*Radio Engineering*—Vol. 9, 1929, Page 34.

True Altitude Meters—L. A. Hyland—*Aviation*—Vol. 25, No. 18, 1928, Page 1322.

Means for Ascertaining Elevations of Aircrafts—E. N. Todd—U. S. Patent No. 1,557,380 issued Oct. 13, 1925.

Bedendistanzmessung vom Luftschiff mittels Kapazitätzmethode—H. Lowy—*Physik Z.*—Vol. 26, No. 18, 1925, Page 646.

Capacity Compensating Device—J. H. Hammond, Jr., U. S. Patent No. 1,561,228, Issued November 10, 1925.

Ballonversuche über die Abhängigkeit der Antennenkapazität von der Bodendistanz—E. Alberti, W. Klemperer, and H. Lowy—*Physik Z.*—Vol. 26, No. 18, 1923, Page 644.

Radio Tells Aircraft Altitude—*Aerial Age Weekly*—May 22, 1922, Page 258.

Experiments with Underground Ultra High Frequency Antenna for Airplane and
[Continued on page 66]

This Month

W-E TELEVISION

Western Electric Company plans to manufacture television transmitting equipment in the postwar period, according to an announcement by F. R. Lack, vice president in charge of the company's radio division.

Mr. Lack pointed out that during peacetime Western Electric is the manufacturing and supply unit of the Bell System and a leading manufacturer of radio broadcasting equipment. Since Pearl Harbor, he said, the Company has become the Nation's largest producer of communications and electronic devices for the Armed Forces, including amplitude modulated and frequency modulated radio transmitting equipment.

Supplementing the plans for manufacture of television transmitters. Mr. Lack indicated that an active program of television development will be undertaken as soon as war conditions permit. The postwar transmitting equipment will be distributed through Graybar Electric Company.

WPB ACTIONS

The Industrial Sound Equipment Industry Advisory Committee believes that electronic equipment controls should not be revoked until all military requirements can be met, but that controls should be modified as war demands decrease and materials become more readily available, officials of the War Production Board's Radio and Radar Division said today.

Revocation or modification of Limitation Order L-265 was considered by the committee, which met recently in Washington. Equipment used in public address systems, inter-communication systems and other industrial sound amplifying equipment falls within the category of electronic equipment involving the use of vacuum or gaseous tubes, under L-265. Since the war, considerable apparatus of this sort has been used in industrial plants to increase production, maintain morale, and save time and labor. The military demand for this type of equipment and many of its components also contributes to the present civilian shortages, it was pointed out.

Means of acquiring equipment for civilian uses were outlined to the committee by John Creutz, Government presiding officer, who said that a user may file WPB Form 541 with an equipment manufacturer through any WPB field office, provided no construction is required. If construction is required, Form 617 must be filed.

WPB field offices will screen all applications on their merits. The burden of proof in establishing essentiality will rest with the applicant.

WPB Radio and Radar Division officials announced it is possible that some commercial equipment not suitable for military, marine and foreign uses, which require special sealing and weather proofing, might become available for industrial use. Industry members pointed out that they



The yachtman's telephone has gone to war. The midget Western Electric 8 watt radio transmitter and receiver which formerly enabled the small boat owner to keep in communication with the Coast Guard, land telephone system and with other radio-equipped vessels, is shown above installed aboard a Merchant Marine training ship.

probably could use rejected Army and Navy equipment if it could be made available. Supplies of sound equipment for industrial purposes and installations have been inadequate during the past year, members said, adding that they now had not stocks on hand.

Means of aiding jobbers in securing sound equipment for service and repair of their customer's systems were discussed and it was recommended that permission to acquire essential sound equipment be extended to a number of jobbers. Such jobbers that require units of equipment should file Form 547, but it was explained that this would not apply to, nor cover parts. Applications for equipment will be considered and the worthy ones processed, officials said. However, such stocking as

allowed would be for emergency repairs, and not for general resale.

The issuance of a pamphlet entitled "Guide of Industrial Sound", designed to explain the uses and value of sound equipment, was announced. This document will soon be put on sale by the Superintendent of Documents.

BROWDER J. THOMPSON KILLED IN ACTION

Browder Julian Thompson, Associate Research Director of RCA Laboratories, Princeton, N. J., who had been on leave from RCA since December, 1943, serving as expert consultant in the Office of the Secretary of War, was killed in action during a flight in an Army plane in the

[Continued on page 44]

RADIO DESIGN WORKSHEET

NO. 32—PUSH-PULL CIRCUIT FUNDAMENTALS; SIMPLE SOLUTION OF HALF-WAVE AND FULL-WAVE LINEAR RECTIFIERS

PUSH-PULL CIRCUIT FUNDAMENTALS

In Fig. 1(a) is shown a line AA' representing a magnitude and a direction. The length of AA' might represent a force, a voltage, or a current. Moreover, the direction in which this force, or voltage, is applied is defined by the position of AA' . However, the voltage may be applied in a direction AA' or $A'A$. This is further defined in Fig 1(b) in which the sense is expressed by the arrow showing that the direction of the voltage in AA' . The line AA' is a vector.

Vectors may be added or subtracted by several means. For example, in Fig. 1(c) we have two vectors AA' and AB having a common origin A . As long as the magnitude, direction and sense of the vectors are unchanged they may be set up with a common origin or end to end. Thus, to add the two vectors they may be placed as shown in 1(c) and the parallelogram completed. The diagonal of the parallelogram is then the vector sum (i.e., AO).

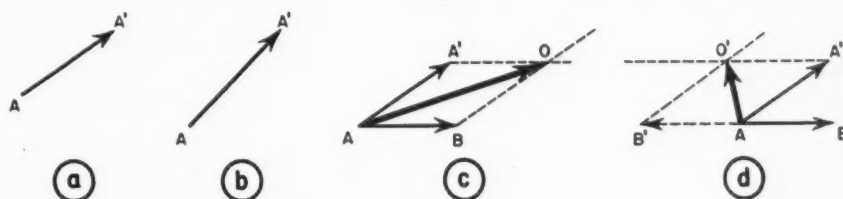


Figure 1

Vectors may be subtracted in like manner. That is, by reversing the sign (i.e., sense) of one of them and adding vectorially as at 1(d). Here is represented $AA' - AB$. Thus $AB' = -AB$ adding AB' and AA' yields AO' , again by completing the parallelogram. The difference $AB - AA'$ would be equal in magnitude to AO' but opposite in sense; in other words $-AO'$. Fig. 2 shows another method of adding and subtracting vectors by placing them end to end and joining the origin and the point of the last vector for the result.

Sense and relative direction are often described as phase. Thus the phase of B lags A and C leads A in phase. This is in accordance with the accepted pattern of considering that the vectors rotate in an anti-clockwise di-

rection for alternating or pulsating electric current or voltage.

An alternating current or voltage may also be represented by a sine wave or simple harmonic motion as shown in Fig. 3(a) either as a sine wave or a line with sense.

The position of the vector relative to any other vector may be shown by the angular rotation of the vector in radians (or degrees) or as indicated by the two sine waves of Fig. 3(b). Here vector C is shown leading B by $\pi/2$ radians (i.e., 90 degrees). Obviously B and C may be added or subtracted in either form with similar results. Procedures are identical but adding and subtracting sine waves is somewhat laborious since the waves must be added or subtracted point by point.

Fig. 4 shows a generalized push-pull circuit with power supply circuits

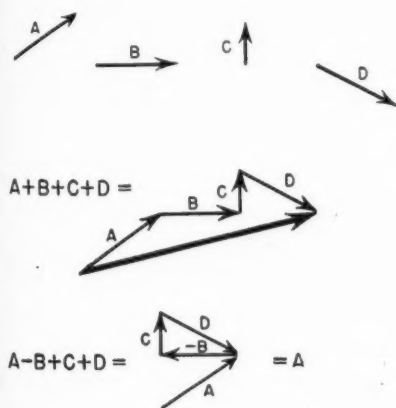


Figure 2

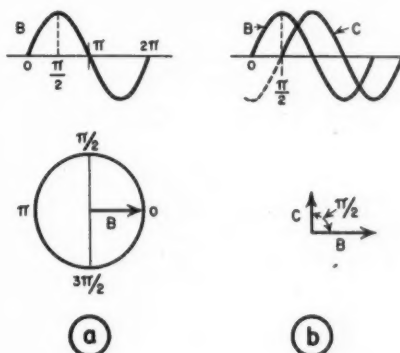


Figure 3

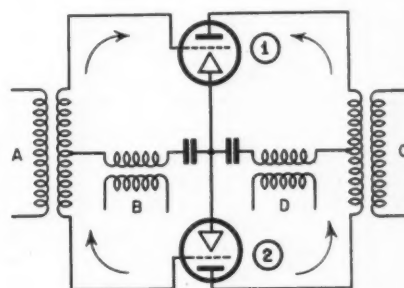


Figure 4

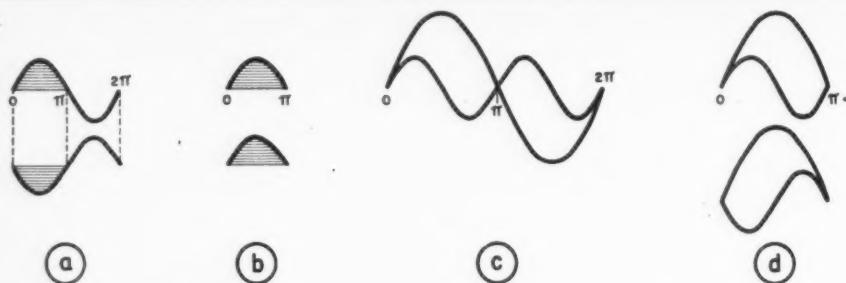


Figure 5

omitted. If a voltage $E = C \sin \alpha$ is introduced at A the grids of tubes (1) and (2) will be energized in phase opposition. That is the grid of tube (1) will be negative while the grid of tube 2 is positive and vice versa. This will result in similar currents or voltages being developed in the plate circuits of tubes (1) and (2). The wind-

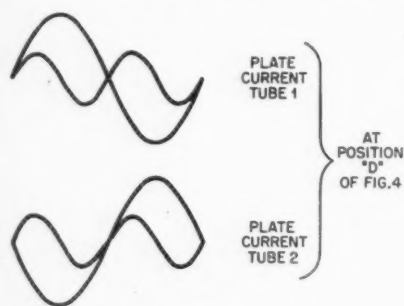


Figure 6

ings of transformer C are so connected that these currents are additive in the secondary. Since these currents are out of phase direct addition would result in cancellation if the two did not differ in phase by other than π . However, if two identical waves differing in phase by π radians are to be combined so that their fundamentals are additive, the situation shown in Fig. 5 results. As a result second and other even order harmonics introduced by the push pull circuit will be balanced out or at least materially reduced. This is obvious if it is recalled that the effect of the push-pull balance is to invert the half of the wave from π to 2π , shift it in phase by π radians, and add directly to the positive half-cycle from 0 to π . The cancellation of even harmonics is evident from an inspection of Fig. (d).

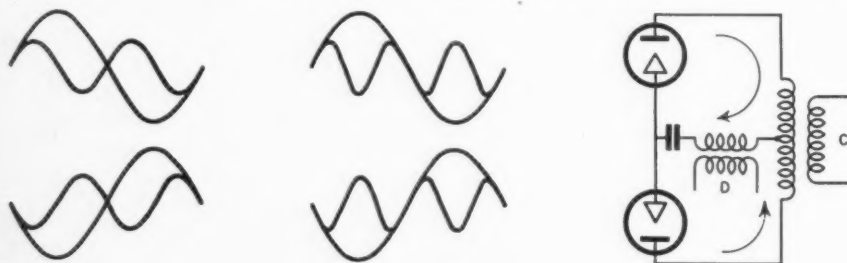


Figure 7

However, transformer D in Fig. 4 is not connected differentially so the plate currents of the two tubes add directly. Since they differ in phase by π radians the situation pictured in Fig. 6 results. In this case the even harmonics are in phase and additive, whereas the fundamental and odd harmonics cancel out as indicated in Fig. 6. It should be remembered that odd harmonics are symmetrical about π insofar as their relation to the fundamental is concerned, whereas even harmonics are not.

Next, consider the effect of the introduction of the signal at B in Fig. 4 instead of at A . In this case both grids are essentially in parallel and are each positive at the same instant. As a result the plate currents are in phase and due to the differential connection of transformer C , the fundamental balances out as do the even and odd harmonics, but all of them appear at D . This can be visualized by inverting a wave and its harmonics as shown in Fig. 7. This is legitimate because the currents in the two halves of the primary of C are theoretically equal and opposite. It therefore follows that complete cancellation will take place provided the currents are identical and the transformer C is perfectly balanced. At transformer D , however, both plate currents are in phase, and since they are identical theoretically even to harmonic content, they are additive as are all harmonics. This can be visualized by comparing the push-pull circuit obtained by folding one half of the push-pull circuit over the other so that tube 2 coincides with tube 1 and the two halves of transformer A and C

coincide. Consequently, transformers B and D may be viewed as would the normal input and output transformers of a single tube circuit.

The above analysis applies chiefly to amplifier circuits since only one signal wave has been considered. In a future article the results of the introduction of two signals will be analyzed, including the introduction of one signal wave at A and another at B . At that time we will consider, in addition to even and odd harmonics, even and odd order modulation products.

SIMPLE SOLUTION OF HALF-WAVE AND FULL-WAVE LINEAR RECTIFIERS

Fig. 8 represents the current voltage characteristic of a linear half-wave rectifier. If it is assumed that the volt-

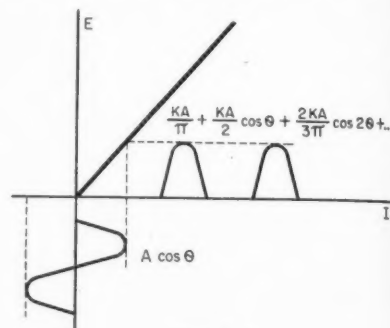


Figure 8

age to be rectified is sinusoidal, it may be represented by:

$$E = A \cos \theta$$

A solution of this simple case may be obtained by multiplying the voltage to be rectified by an appropriate square wave, having the same periodicity. Such a wave can be represented by:

$$\frac{K}{2} = \frac{2K}{\pi} \cos \theta - \frac{2K}{3\pi} \cos 3\theta + \dots$$

The result of multiplying this equation yields:

$$\frac{KA}{\pi} + \frac{KA}{2} \cos \theta + \frac{2KA}{3\pi} \cos 2\theta + \dots$$

Following the same reasoning a full-wave rectifiers functions as two half-wave rectifiers in which the rectified voltages differ in phase by π radians.



Figure 9

The direct current positions will add directly but the odd harmonics, including the fundamental, will subtract. If the two rectifiers are identical the odd harmonics and fundamentals will vanish. See Fig. 9.

The Terminology of ELECTROMAGNETIC THEORY

Because recent developments in the field of microwave radiation and generation have greatly widened the engineer's interest in electromagnetic theory, the following alphabetical list of terms, ideas, and theorems is presented. It is not so much intended that the discussions be rigorous definitions as that they shall give interesting ideas and serve as an introduction to the concepts.

Transducer—Any combination of conductors and dielectrics having two pairs of accessible terminals is called a transducer. Thus a transducer may be any

open-circuited. The other Y 's and Z 's which are often referred to as transfer admittances or impedances are also found with one set of terminals open-circuited,

that description by graphical methods so as to allow a more ready physical picture of the situation.


To represent a vector field with lines of force, imaginary lines are drawn throughout the space so that the vector for any point has a direction tangent to the lines of force in that neighborhood and a magnitude equal to the density with which the lines have been drawn. If a bundle of lines of force which pass through a certain neighborhood are considered together and if the outer lines of that bundle are spanned by a tubular surface, that surface is called a tube of force.

Tubes of force are particularly useful in some calculations because of several properties which they have. For one thing, no two lines of force can ever cross since such a crossing would make the specification of the vector at the crossing point ambiguous. This means that a tube of force contains the same flux (same number of lines of force) throughout its length and by any change in its cross-sectional area a strengthening or weakening of the field is indicated.

Tubes of force may be considered as carrying lines of force much as pipes carry a liquid. Indeed, if the vector field is one giving the flow velocities in a liquid system, the tubes of force may actually correspond to physical pipes carrying the fluid.

Vector Potential-A—In the steady state the electric potential of a point in space is the energy necessary to bring a unit charge to that point from some place which we call zero potential. This method of describing the electrical properties of a space has several advantages. It is intrinsically simpler than the statement of the three field components; it allows certain mathematical calculations to be carried out in a simple fashion; and it makes use of the volt which has considerable physical significance.

[Continued on next page]

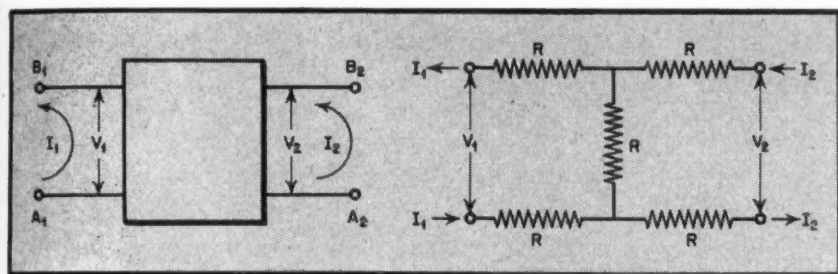

such thing as a telephone transmission line, a transformer, or even a pair of radio antennas located some distance apart. If the input terminals which are called A_1 and B_1 have a current I_1 flowing in A_1 and out B_1 , and if the output terminals, A_2 and B_2 have a current I_2 flowing in A_2 and out A_2 (see figure) then the transducer is said to be a linear transducer if

$$V_1 = Z_{11} I_1 + Z_{12} I_2$$

$$V_2 = Z_{21} I_1 + Z_{22} I_2$$

where the Z 's are impedances and the V 's are the input and output voltages.

In general, linear transducers are obtained whenever non-linear devices, such as vacuum tubes and iron-core transformers, are avoided.

It is of course possible to solve the above equations for the currents. When this is done they are often written in the form

$$I_1 = Y_{11} V_1 + Y_{12} V_2$$

$$I_2 = Y_{21} V_1 + Y_{22} V_2$$

In either of these sets of equations the quantities Z_{11} , Z_{12} , Z_{21} , and Z_{22} are the impedance or admittance of an appropriate pair of terminals when the other set is

but this time the voltage at the open-circuited set is combined with the current in the other set to obtain admittance or impedance. The Z 's and the Y 's are all a function of the electrical properties of the transducer and may also depend on frequency but they are independent of the I 's and V 's.

For example, if the transducer is five equal resistors, each of R ohms connected in the form of an H with the lower and upper ends of the H considered respectively as accessible pairs of terminals, the Z 's and Y 's will have the following values:

$$Z_{11} = Z_{22} = 3R$$

$$Z_{12} = Z_{21} = R$$

$$Y_{11} = Y_{22} = 1/3R$$

$$Y_{12} = Y_{21} = 1/R$$

Tubes of Force—A vector field is a space which has a vector of a given direction and magnitude defined at each and every point. Such a field may be described by an equation or a pair of equations which give vector magnitude and direction as a function of some coordinate system or it may be represented graphically by the use of lines of force. Even when the mathematical method of specification is used it is often desirable to supplement

[Continued from page 39]

In the magnetic case, however, it is not generally possible to talk about such a scalar potential. The energy involved with a unit magnetic pole is not uniquely determined by the position of that pole in space and since that is what we mean by scalar potential, we can not assign unique potential values to such points.

An example of this is apparent in the case of a magnetic pole located in the neighborhood of a wire carrying a current. The work involved in getting the pole to such a position may be anything depending upon the number of trips around the wire that were made enroute.

The magnetic vector potential is a means of overcoming this difficulty and allowing a potential function to be set up that will salvage at least some of the advantages of scalar potential theory. For example, in the case of a wire carrying a steady current, the magnetic vector potential is a vector pointing along the wire in a direction opposite to the current flow. In Gaussian units the magnitude of the vector potential falls off with distance from the wire in accordance with

$$A = -(2i/c) \ln r$$

This is in contradistinction to the way the scalar potential falls off with distance from a charge, which is given by

$$\phi = \rho/r$$

To find H from A it is necessary to take the curl of A while, in the scalar potential case the negative gradient of ϕ will give E .

The vector potential of a vector H is given by $\text{curl } A = H$ plus some specification on $\text{div } A$ which in the steady state case is taken as $\text{div } A = 0$.

In the general case where the electromagnetic fields may change with time neither E nor H have zero curls, which is the criterion for setting up scalar potentials. We may nevertheless use ϕ and A by setting $E = -\text{grad } \phi - (1/c)(\delta A/\delta t)$ instead of simply $-\text{grad } \phi$, and by defining A with $\text{div } A = -(1/c)(\delta \phi/\delta t)$.

Wave Guide Cutoff Wavelength

— λ_c —Hollow pipe wave guides have characteristics that are in many ways similar to those of high-pass filter networks. If a wave of a given frequency and strength is incident into the input end of a wave guide, equal or lesser amounts of power will be caused to emerge from the far end. The decrease in energy during transmission is called attenuation and may be due not only to actual losses into heat but also to the reflection of energy back along the path from which it came.

Even if we assume that the guide is made of a perfectly conducting material, attenuation which is usually measured in db per foot is possible because of reflection and, in general, is found to depend upon frequency in such a way that at some frequency it increases very rapidly with a further decrease in frequency.

The wave length λ_c corresponding to the cutoff frequency f_c beyond which the

attenuation of a wave guide rises very rapidly is called the cutoff wave length.

In an actual wave guide where dissipative attenuation is also taken into account, a plot of attenuation versus frequency usually shows a minimum at a point just above the cutoff and gradually increases again at higher frequencies. This high-frequency attenuation is due to the finite conductivity of the material and is so much smaller that it is not easily confused with the large attenuation experienced with wave lengths that are longer than the cutoff wave length.

A slightly more mathematical but also more accurate way to describe cutoff in a wave guide has to do with the propagation constant and the characteristic impedance. When the wave length is small the propagation constant is a pure imaginary quantity indicating a traveling sinusoidal wave and the impedance is real, showing that no energy is to be reflected from points along the interior of the guide. On the other hand for long wave lengths, the propagation constant becomes real and thus designates an exponential falling off of the energy transmitted while the impedance becomes imaginary to show the presence of a reflected component. The frequency or wave length at which these quantities change from real to imaginary is called the cutoff frequency or wavelength.

Wave Guide Modes—A given piece of hollow pipe wave guide is capable of transmitting electrical energy in one or more of an infinite number of ways or modes which are distinguishable from each other because of characteristic patterns of the electromagnetic field which are formed within the guide.

In a particular case only one or a limited number of modes may be excited, depending upon the frequency that is employed and how the energy is introduced into the wave guide. For example, with a rectangular wave guide all the possible modes may be included under two main groups which are commonly referred to as respectively transverse electric and transverse magnetic modes.

These names are usually abbreviated as TE and TM . They indicate in the one case that the electric field is directed only crosswise of the wave guide and not at all along its length while in the other case the same is true of the magnetic field. The various modes existing in each class are given by subscripts as TE_{mn} or TM_{mn} . The subscript m tells the number of half-wave variations in field intensity that are to be found in traveling one way across the rectangle while n gives the same information for the other transverse dimension.

The mode of a wave guide which can be utilized with the lowest possible frequency for a given set of dimensions is called the dominant mode. It is generally the most useful one because it can be used under conditions that deny competition from any higher modes which are then

well beyond cutoff so that practically no energy can be accepted by them. In the case of a rectangular wave guide, the TE_{10} mode is dominant and is the only mode that will propagate if the narrow dimension of the guide is sensibly less than a wave length. With a circular wave guide, only the dominant mode is transmitted without severe attenuation if the radius of the pipe is appreciably less than 0.38 times as great as the wave length but greater than 0.29λ .

Wave Length in Wave Guide—

λ_g —In coaxial lines using an air dielectric the wave length is always the same as in free space and is given by $\lambda_f = c/f$ where c is the velocity of light. In all types of hollow pipe wave guide the wave length is longer than it is in free space so the phase velocity given by $V = \lambda_g f$ is greater than the velocity of light and the group velocity which is the speed with which a modulation signal is carried along the wave guide is less than the velocity of light. The wave length λ_g is related to the cutoff wave length and the free space wave length by the relation

$$\lambda_g = \frac{\lambda}{\sqrt{1 - \left(\frac{\lambda}{\lambda_c}\right)^2}}$$

From this expression it is clear that if a wave guide is operated very near its cutoff frequency λ_g becomes very large and the group velocity may become relatively small. In a practical wave guide, however, the attenuation due to current losses in the walls of the guide also becomes large as cutoff is approached so that a lower limit to the group velocity is encountered rather soon.

Weber—The unit of magnetic flux in the Giorgi or mks system of units is the weber. If an open circuited loop of wire is initially in a field free space and if a magnetic field is allowed to build up through the loop at a rate such that one volt appears across the terminals of the loop, then at the end of one second the magnetic flux through the loop is one weber.

Thus the weber is not a unit of B directly as is the gauss in the Gaussian system of units but rather is analogous to the more infrequently used flux unit called the Maxwell.

Magnetic field strength, B , is measured in terms of webers per square meter. This is in accord with the usual graphical device in which lines of flux are defined as a family of imaginary curves drawn in a space in such a way that at any point a tangent shows the direction of the field and the density of the lines gives its strength.

A weber is, in this picture, the name of one of these imaginary curves and by the convention, the number of webers per unit of area is the strength of the field.


New Products

NEW IRC 1-WATTERS

International Resistance Company announces a new addition to their well known BT line . . . the BTA insulated 1-watt resistor, available for prompt delivery on priority orders.

Designed particularly for applications requiring American War Standards' RC30 Specifications, the BTA also will fill a real need in a wide variety of limited space, low-power applications.

Characteristics of the new, small BTA compare favorably with those of the widely used Type BT-1, although the new unit is only 60% of the size of the BT-1.



Tests indicate that the 56°C. temperature rise of the BTA is lower than that of any other 1-watt insulated composition resistor of comparable size.

The type BTA is 0.718" long by 0.250" in diameter. It has a wattage rating of 1-watt at 40°C. ambient and a voltage rating of 500-volts. Minimum range is 330 ohms. Standard maximum range is 20 megohms. Higher ranges are available on special order.

Requests for technical bulletin on the BTA insulated resistor should be addressed to Department N7, International Resistance Company, 401 N. Broad Street, Philadelphia 8, Pa.

PUNCH-LOK CATALOG

A new catalog on the Punch-Lok clamps and fittings for many purposes is now available upon request to the B. F. Goodrich Company, Akron, Ohio, national distributors of the product. Feature of the catalog is the pictorial descriptions, accompanied by text of the many clamps and fittings, together with tables giving information on all sizes. Tools used in applying Punch-Lok clamps and fittings are also described.

THEATRE TELEVISION HANDBOOK

A comprehensive handbook on the what, how and why of theatre television has been prepared by the RCA Service Company for theatre managers and projectionists, it was announced by W. L. Jones, Vice President of the Company. The book, which will be ready for distribution before the end of December, is profusely illustrated throughout.

Rapidly growing interest in this great new potential entertainment medium had resulted in many requests from theatre managers and projectionists for lectures on the subject. Due to the difficulties existing today in carrying out such a

program, it was felt that a book, containing much of the lecture material which had been prepared, would best meet present day requirements and provide much valuable information to industry members generally the announcement stated.

Although the contents are primarily devoted to technical discussions of the reception and large-screen projection of television programs, several chapters deal with such non-technical subjects as television commercial possibilities, the handling of programs, and audience response.

In step-by-step fashion, the technical discussions provide projectionists with an abundance of data ranging from a review of electrical fundamentals to video circuits, sweep and synchronizing circuits, and the operation of a television system. The theory and operation of diodes and rectifiers, voltage amplifiers, and limiters are thoroughly explained.

Entitled "Theatre Television Handbook for Projectionists," the book will be mailed without charge to theatre owners, managers, and projectionists upon request to the RCA Service Company, Inc., Camden, N. J.

ELECTRONICALLY CONTROLLED PROCESS INCREASES TRANSPARENCY OF LENSES

Small squares of glass, each having a circular center area treated to make it appreciably more transparent than the rest of the square, were handed to guests at a meeting of the Kiwanis Club of Philadelphia as evidence of the improvement in everyday products which is being effected by industrial applications of electronics.

The treatment, which promises more efficient cameras, microscopes, field glasses, and eyeglasses after the war, according to Fred W. Wentker, of the Radio Corporation of America, consists of applying to both sides of the glass a film of a specific transparent material about 5 millionths of an inch thick. This film, the thickness and hardness of which is controlled by electron tubes, increases transparency by minimizing the tendency of the glass to reflect light.

NEW TAYLOR 813 TUBE

Continuing the manufacture of beam power transmitting tubes under the RCA license, Rex L. Munger, Sales Manager of Taylor Tubes, Inc., 2312 Wabansia Avenue, Chicago, has announced that production has been started on the 813 tube.

The Taylor 813 is a beam power tube of extremely high sensitivity with a maximum plate dissipation of 100-watts. It requires less than 1-watt of driving power to produce about 260 watts when used on CW; and it need not be neutralized in circuits which provide adequate shielding. The tube utilizes low screen current and, when used as a frequency multiplier, is able to generate a high harmonic output at

high efficiency. It can be operated at maximum ratings up to frequencies of 30 MC and with reduced ratings up to 60 mc. Maximum CW output is 360 watts, and plate modulated output is 240 watts, when operated in class C. Mounting is either vertical or horizontal, but in the latter case the filament must be kept in a vertical plane.

The tube is 7 1/4 inches maximum overall length, and has a maximum diameter of 2 9/16 inches. It has a medium metal plate cap and is fitted with a giant 7-pin base of ceramic construction surrounded by an aluminum shell.



Electrical characteristics: Filament (thoriated tungsten) voltage—10 volts a-c or d-c at 5 amperes; transconductance for plate current of 50 ma is approximately 3750 umhos; interelectrode capacitances—grid to plate (with external shield)—0.2 (max.) mmf, input—16.3 mmf, output—14 mmf.

Typical operating conditions (Class C telephony)—d-c plate voltage—100 volts; d-c screen voltage—400 volts; d-c grid voltage—minus 130 volts; peak r-f grid voltage—210 volts; beamforming voltage—0 volts; d-c plate current—150 ma; d-c screen current—20 ma; d-c grid current (approximately)—6 ma; driving power (approximately)—1.2 watts; power output—175 watts with a carrier condition with a maximum modulation factor of 1.0.


The tube is presently available solely on a basis for war contracts, it was stated.

CARBON PILE RHEOSTATS

Under impetus of war requirements demanding resistance adjustments more critical, more precise, smoother, and more dependable resistance variation than is possible with conventional variable resistance units, the Stackpole Carbon Company, St. Marys, Pa., has developed many new types and sizes of continuously adjustable carbon

[Continued on page 56]

•LOSS DUE TO IMPEDANCE MISMATCH•



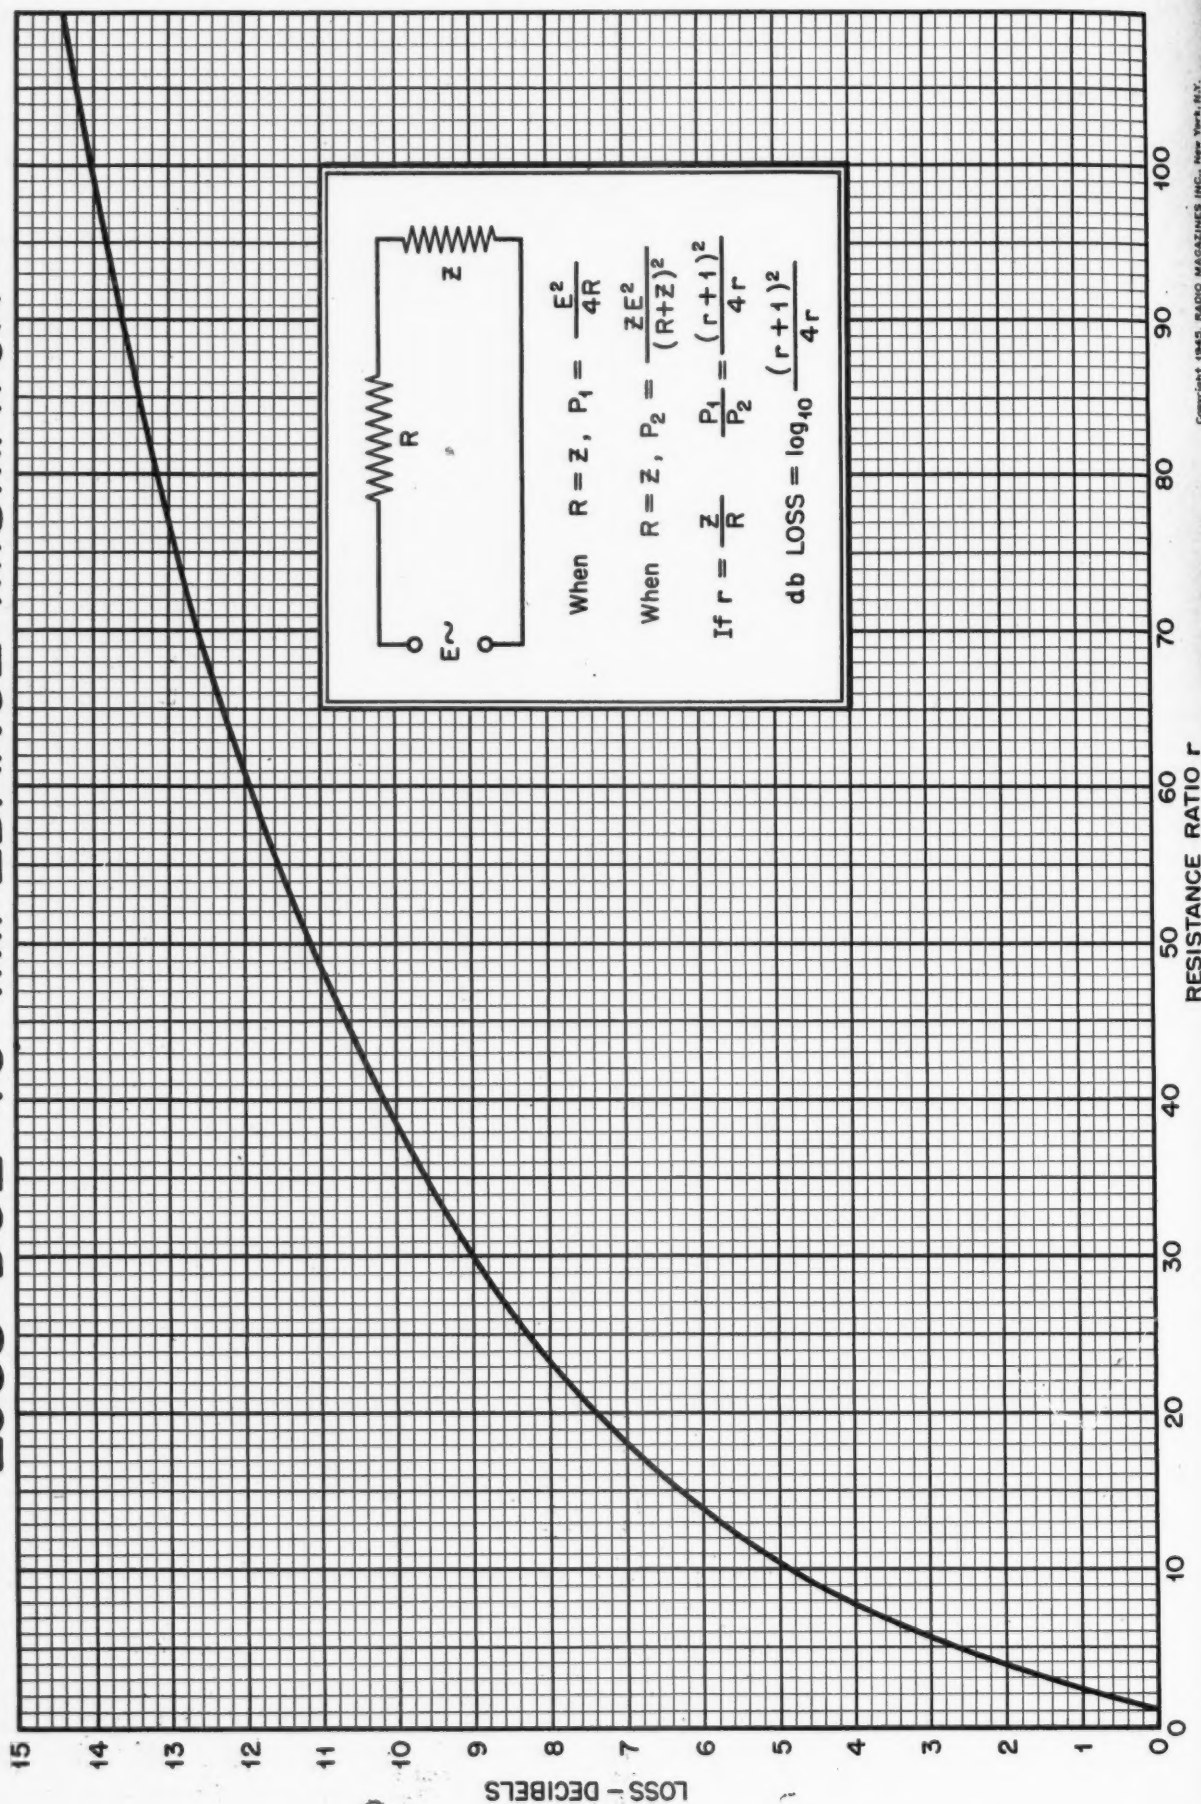


Copyright 1945, RADIO MAGAZINES INC., New York, N.Y.

THE WORLD'S MOST FAMOUS BOOK FOR RADIO-ELECTRONIC BEGINNERS (No previous training necessary)



A. A. GHIRARDI
Let Radio's most
widely-read techni-
cal author help you
start training NOW
for a fascinating,
profitable future!

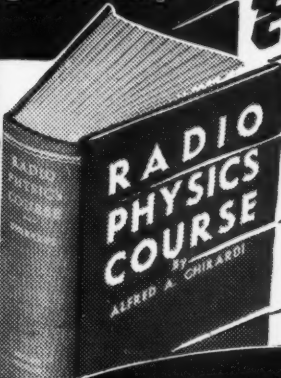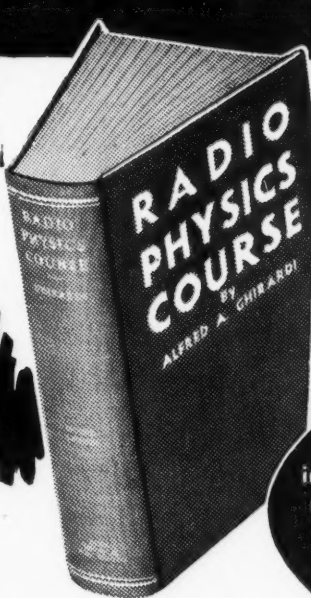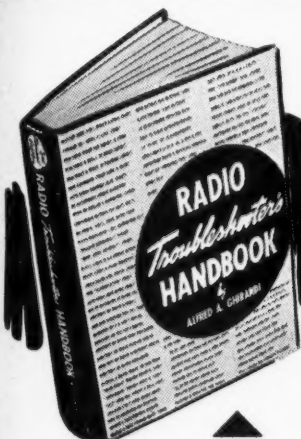

**LEARN RADIO-
ELECTRONICS
EASIER
BETTER
FASTER
for Only \$5.**

YOUR MONEY BACK

in 5 Days if Ghirardi's 972-page RADIO PHYSICS COURSE Book doesn't teach you Radio-Electronic fundamentals EASIER, FASTER and at LESS COST than any other book! That's how sure we are that Ghirardi's RADIO PHYSICS COURSE is the very best in the field!

HERE'S HOW TO REPAIR RADIOS THE EASY WAY!

A Definite Guide for Diagnosing, Locating and Repairing Radio Receiver Troubles

Radio servicemen everywhere say that this big 3rd edition of A. A. Ghirardi's RADIO TROUBLESHOOTER'S HANDBOOK helps them turn out twice as much work in a given time! Radio "tinkers" and beginners who like to fix their own home sets and those of friends find this big book a quick, easy way of locating and repairing receiver troubles without extensive shop equipment! Nine times out of ten, it tells exactly how to make the necessary repair—with-out any elaborate testing whatever!

NOT A "STUDY" BOOK

Actually, this big, 744-page manual-size RADIO TROUBLESHOOTER'S HANDBOOK is a complete guide to the trouble diagnosing, locating and fast repairing of PRACTICALLY EVERY TYPE OF RADIO RECEIVER NOW IN USE. It isn't a "study" book. You simply turn to it whenever you want to fix a particular type of trouble in a particular make of radio. Its 404-page Case History Section

gives full details on common trouble symptoms, their causes and remedies for OVER 4,000 DIFFERENT RADIO RECEIVER MODELS. It describes the trouble exactly—tells exactly how to repair it. It eliminates extensive testing—helps you do two jobs in the time normally required for one—repair cheap sets at a profit—substitute tubes and parts profitably—train new helpers, etc., etc.

In addition, hundreds of other pages are devoted to the most modern tube chart you've ever seen; tube and parts substitution data; I-F alignment peaks for over 20,000 superhets; a big section on I-F transformer troubles — and dozens of charts, graphs, helpful hints and data compilations—all carefully indexed for quick, easy reference.


This big, beautifully bound HANDBOOK is only \$5 (\$5.50 foreign)—on our UNRESERVED 5-DAY MONEY-BACK GUARANTEE. You cannot lose!

HERE'S HOW TO LEARN MODERN RADIO SERVICE WORK

... without an instructor!

A. A. Ghirardi's MODERN RADIO SERVICING is the only single, inexpensive book that gives a complete, easily understandable course in modern radio repair work in all of its branches. Written so simply you can understand it without an instructor! Read from the beginning! It takes you step by step through all phases of the work—or, used as a reference book by busy servicemen, it serves as a beautifully cross-indexed work for "brushing up" on any type of work that may puzzle you.

Included is a thorough explanation of all Test Instruments, telling exactly how they should be used and why (it even gives all necessary data for the construction of test equipment for those who prefer to make their own!); Receiver Troubleshooting Procedure and Circuit Analysis; Testing and Repair of Components; Installations; Adjustments; etc., etc.—also How to Start a Successful Service Business. 1300 pages; 720 Self-Testing Review Questions; 706 helpful illustrations and diagrams. Only \$5 complete (\$5.50 foreign) on our 5-Day Money-Back Guarantee.



SAVE MONEY!

See coupon for special combination offer on MODERN RADIO SERVICING and RADIO TROUBLESHOOTER'S HANDBOOK — over 2040 pages of helpful service data!

MOST POPULAR FOR ARMY-NAVY AND CIVILIAN RADIO TRAINING

This same inexpensive book has given more people their basic Radio-Electronic training than any other ever published. It is more widely endorsed by men who know. Because of its sheer merit, it is more universally used for home study, and more widely employed in U. S. Army Signal Corps, Navy and civilian schools and colleges than any other book on the subject. Would you want any better proof than this?

EVEN IF YOU DON'T KNOW ANY- THING ABOUT RADIO!

Even if you've had no previous Radio or Electrical training or experience, it's easy to learn from Ghirardi's RADIO PHYSICS COURSE! Everything that can be done to make learning easy has been done for you. It painstakingly explains everything in detail so you cannot fail to understand. Over 500 specially prepared illustrations help you to visualize every action. You don't have to know a single thing about Radio in advance. All you need is a little spare reading and a desire to get started RIGHT for a profitable future in any of Radio-Electronics' many branches—

from service work to aviation, military, broadcast, manufacturing, public address and many others.

SCOPE OF 36 COURSES IN ONE

Actually, RADIO PHYSICS COURSE gives you the scope of 36 different courses in one convenient, inexpensive big book. Nothing is left out. Nothing is condensed. Nothing is left to chance. You learn all you need to know. You don't need to wait for monthly lessons. You progress as rapidly as you wish in your spare time and in the comfort of your own home.

A \$50 VALUE FOR \$5 COMPLETE

RADIO PHYSICS COURSE is acclaimed everywhere as the "biggest bargain" available in Radio-Electronic training. If it were broken into sections and sold as a course, you'd regard it as a bargain at \$50 or more—but you actually buy it all here complete in one big 972-page handsomely bound book for only \$5 (\$5.50 foreign) and with our absolute 5-Day MONEY-BACK GUARANTEE. Get the book and see for yourself. Compare it with any other book or course on the market—at any price. See how much more complete it is, how much better illustrated, how much easier to understand! You be the judge! You cannot lose!

WARNING! Paper shortages may make it impossible for us to continue meeting the tremendous demand for all Ghirardi Radio Books. Don't take chances! Order yours today while they're still available. Use this Order Form.

RADIO & TECHNICAL DIVISION OF MURRAY HILL BOOKS, INC.
Dept. R-15 232 Madison Ave., New York 16, N. Y.

Enclosed find \$..... for books checked; or ☐ send C.O.D. for this amt. plus postage. If I am not fully satisfied, I may return the books within 5 days and receive my money back.

☐ RADIO PHYSICS COURSE
\$5.00 (\$5.50 foreign)

☐ 3rd. Ed. RADIO TROUBLE-
SHOOTER'S HANDBOOK
\$5.00 (\$5.50 foreign)

☐ Special "MONEY-SAVING"
Combination MODERN RADIO
SERVICING with the HANDBOOK
\$9.50 (\$10.50 foreign)

☐ MODERN RADIO SERVICING
\$5.00 (\$5.50 foreign)

Name

Address

City City Dist. No. State

REPAIR ANY KIND OF RADIO EQUIPMENT
PREPARE YOURSELF FOR A BETTER JOB AT HIGHER PAY IN THE RADIO-ELECTRONIC FIELD

THIS MONTH

[Continued from page 41]

Mediterranean Theater while on a special mission for the Secretary of War, it has been announced by the War Department. Mr. Thompson was forty years old.

The announcement said that Mr. Thompson, who previously had been reported missing, lost his life on the night of July 4-5, 1944. It described his mission as "of direct and vital importance to the war."

Mr. Thompson was recognized as one of America's foremost radio research engineers, having completed many outstand-

ing developments, including perfection of the famous "acorn" tube used in ultra-high frequencies. He headed important research work on television tubes and tubes for generating power, and was credited with advances in screen-grid tubes and power pentodes that became mainstays in broadcast reception.

Mr. Thompson was awarded the Morris Liebmann Memorial Prize by the Institute of Radio Engineers in 1936 for his contributions to the ultra-high frequency field of radio. He was a Fellow of the Institute of Radio Engineers and the American Physical Society; a member of Tau Beta Pi; and Sigma Xi. He had been a Director of the Institute of Radio Engineers since 1937.




New Internal Gage Avoids Over Cutting... Saves Wasted Man Hours

At last a gage that takes the guess work out of checking internal diameters either machine bored, or close ground and lapped. It is called the Keene Internal Gage and is the first accurate method for fast correct checking of internal splines and gears on both minimum and root diameters. The gage is ideal for machining and inspection work, and proves its value in increased production. It can be used with either a master, or micrometers.


This time saving development is constructed of aluminum, is six inches long and weighs only five ounces. Available in models designed to read in thousandths (.001) or in tenths (.0001).

When your gage has been checked the thousandths left to bore, the actual job of machining may become tedious. It is then when Wrigley's Spearmint Gum helps keep you alert and watchful. Chewing gum seems to assist you over the dull spots in the day's work. And Wrigley's Spearmint will aid you in your peacetime job by helping to keep you wide awake and efficient during that part of your work that may seem unimportant, but which actually means perfection to the completed product.

You can get complete information from Keene Electrical Machinery Co., 542 W. Washington Blvd., Chicago 6, Illinois.



Determining correct setting for gage.



Closeup of dial showing simplicity and fast visibility.

Z-51

W. R. JONES PROMOTED

The appointment of Mr. Walter R. Jones to the newly created post of General Engineering Manager for Radio Receiving Tubes by Sylvania Electric Products Inc., has been announced by Mr. Roger M. Wise, Vice-President in charge of Engineering. Mr. Jones formerly manager of commercial engineering at Sylvania joined the company in 1929 to set up a sales engineering laboratory.



W. R. Jones

In his new capacity, Mr. Jones will have the direction of the engineering program for radio receiving tubes including the design and development, commercial engineering, chemical, mechanical and standardizing sections.

A senior member of the Institute of Radio Engineers, and a Fellow of the Radio Club of America, he is chairman of the Applications Sub-Committee for Miniature Tubes for the War Production Board. He supervised creation of a series of charts on radio now used to train men in various electronic branches of the Armed Forces. A native of Ossining, New York, Mr. Jones is a graduate of Cornell University, and has headquarters in Emporium, Pennsylvania.

MICROWAVE RELAYS FOR TELEVISION

Nation-wide television hook-ups through microwave radio stations 20 to 100 miles apart all over the country were predicted as an immediate possibility as soon as the war is over by Dr. George B. Hoadley, in charge of the instructional microwave laboratory at the Polytechnic Institute of Brooklyn, at the 597th meeting of the New York Electrical Society in New York City.

George F. Bateman, Dean of the School of Engineering, Cooper Union, and president of the Society, presided at the meeting.

Dr. Hoadley gave the first talk authorized to date by the Publication Referee of the National Defense Research Committee covering an analysis of a complete postwar microwave system for communication purposes. Recently Dr. Hoadley completed his

GLASS-TO-METAL SEALS


by the Thousand!

HUMIDITY-PROOF

SHOCK-PROOF

LEAK-PROOF

**Another modern electrical development
pioneered and perfected by Sprague**



Pioneered many months ago by Sprague, glass-to-metal seals for Sprague Capacitors and hermetically-sealed "Koolohm Resistors

have progressed far beyond any "laboratory curiosity" stage. Not only are they being produced commercially at better than 10,000 seals per day, but they have proved highly efficient both electrically and mechanically. Seal sizes range from very small up to 3" diameter. They work equally well with practically any metal including steel, brass, and monel metal, and do not require the use of glass bushings and adjacent metal rings with "matched" temperature coefficients of expansion.

There are, of course, plenty of "scientific" reasons why glass-to-metal seals of this type are not feasible.

Here again, however, the allegedly impossible has simply provided the incentive for another outstanding Sprague engineering achievement. Actually, the only disadvantage to the seals so far uncovered is the fact that corona voltages are a little lower than we'd like them to be—yet this limitation only becomes a factor at voltages upwards of 25 KV. In all respects, the Sprague glass-to-metal seal answers the old problem of guarding Capacitors and Resistors adequately against leaks and moisture—and without organic bushings or other materials which might be attacked by fungus.

Today, glass-to-metal sealed Sprague Capacitors and "Koolohm Resistors are available in 8,000 electrical characteristic combinations—which is another way of saying that there is a sealed unit for every application that needs one. Details gladly sent on request.

SPRAGUE ELECTRIC COMPANY, NORTH ADAMS, MASS.
(Formerly Sprague Specialties Co.)



* T. M. REG. U. S. PAT. OFFICE

SPRAGUE

PIONEERS OF ELECTRICAL-ELECTRONIC PROGRESS

RADIO

★ JANUARY, 1945

part in a government sponsored research program.

With the great impetus the war has given electronics and the tremendous still secret advances which have been made, the succession of booster stations long envisioned by scientists is now actually practical, Dr. Hoadley said.

To illustrate the component parts of a microwave communication system, Dr. Hoadley demonstrated newly developed devices in action. One of these was a wave guide used as a microwave transmission link. It was a plain section, ten feet long, of galvanized iron drainpipe 3½ inches in diameter. Dr. Hoadley showed that waves actually occur inside this pipe which is used to go from the generator to the

transmitting antennae to get the power there in concentrated form without spilling over into space. Anyone familiar with electricity would think it necessary to have two wires within these microwave tubes; but this is not the case. At the beginning of the war transmission through such a pipe had just become known and had never been used in any practical system. It had been in laboratory use in the training of radio technicians for the Navy, but to date it has not been permitted to be shown outside of these laboratories.

While the principles on which national television could be achieved were recognized by scientists, Dr. Hoadley explained, it took the war to bring about the developments which will hold down the micro-

waves to the defined and limited beam necessary to operate station links. These links will be placed across the country at 20 to 100 mile intervals and in parallel bands 150 to 200 miles apart, much as the several transcontinental railroads now span the country, making it possible for any event of national interest to be transmitted into homes throughout the country.

The advantage of microwave links is the fact that communication can be achieved at microwave frequencies with relatively less transmitter power than would be required for broadcast service. Dr. Hoadley illustrated this point by saying that where a satisfactory short link can be achieved with a small metallic reflector not more than three feet in diameter and at the outside for a longer distance not more than eight feet, the same directional beam obtained with ordinary radio would require a reflector at least a mile in diameter.

The reason microwave boosters are necessary to link television stations located in cities is the fact that the short wave they utilize is bounded by the horizon and cannot travel over the curve of the earth's surface. The microwave links have the same horizon limitation so direct beams must be provided at intervals to take the television broadcast from its source to another broadcast point.


Continuing the discussion of horizon limitation, Dr. Hoadley said that the searchlight provides the closest analogy to microwave transmission. Just as no searchlight can bend over a mountain, for instance, no microwave can jump it. If hills are to be crossed a relay station must be as the top point to pick up stations on either side.

Release by the military of information and the imagination of American industrial designers will be the two determining factors in the use microwaves will be put to in the postwar era, Dr. Hoadley pointed out. Possible uses, he said, may be to increase the availability of radio-telephone communication since this means of communication because of interference between stations already has reached its peak of use. It will be necessary to go to higher and higher frequencies and to evolve new schemes to get around this interference. Another use will be the spanning of water gaps by telephone companies to eliminate costly and delicate sunken cables. In fact, Dr. Hoadley added, a microwave relay station can be set up at any point where it will eliminate costly construction and maintenance in carrying through telephone poles and wires.

A use not entirely confined to the communications field but one which will turn the amazing war employment of radar into a similar civilian use will be the protective equipping of ships and planes so that fog never again will hamper the movement of either. The same technique which made it possible for the American fleet in its first great Pacific battle to pass midway between the Japanese fleet at night and demolish it, will make it possible for ships to enter a port regardless of the extent of the pea soup enveloping it. Never again will such a disaster as that which occurred when the Titanic hit an iceberg be a concern to express ships crossing the Atlantic. Just



OUR CENTRAL LOCATION GIVES YOU QUICKER SERVICE!

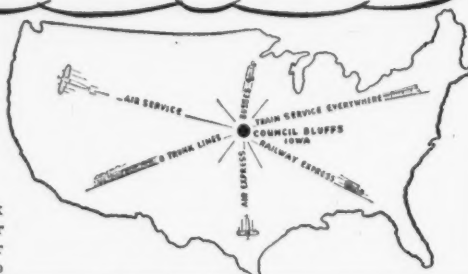

We want to take this occasion to thank you as one of thousands of customers for your business during the past year and for your friendship and loyalty which means so much to us.

In these days of scarcity we have done everything possible to bring you the best in radio parts and equipment. In spite of existing shortages we have made available thousands of items as shown in our printed circulars. As additional equipment is released, we will be the first to have it.

Our New Year's resolution is to continue to give you the same quick service on "hard-to-get" parts as thousands have enjoyed during the past year. Because parts move so rapidly these days we intend to continue our policy of publishing an up-to-date list of merchandise every two or three months. If you do not have our latest flyer—write today.

Sincerely,
Leo S. Hoadley
W9GFQ

HALLICRAFTERS

For many years we have been one of the country's largest distributors of Hallicrafter equipment. We have Hallicrafters available for immediate delivery on priority. For full particulars, write.

Mail Coupon Today

Wholesale Radio Laboratories RM-1
744 West Broadway
Council Bluffs, Iowa

- ☐ Send your reference Book "Tubes and Circuits". Here's my 10c.
- ☐ You bet I want a Tube-Base calculator. 25c is enclosed.
- ☐ Ship me your free radio map. 15c is enclosed for packing and mailing.
- ☐ Send your free flyer of hard-to-get radio parts.

Name _____

Address _____

Town _____ State _____

I am ☐ an amateur; ☐ experimenter;
☐ service man.

OUR LATEST GET-ACQUAINTED OFFERS



TUBE AND CIRCUIT REFERENCE BOOK

Here's a handy reference book that meets the demand for simple, easy to understand data on substitution of radio tubes. Contains valuable technical information on tubes and circuits. It's a guide you'll refer to time and again. Send for your copy today! Only 10c post-paid.

TUBE-BASE CALCULATOR ONLY 25c



Here's just the calculator you've been looking for! Tells you quickly, tube characteristics that enable you to substitute available tubes for those hard to get. Only 25c. We pay shipping expense.

FREE Giant Radio Reference Map



Time zones, amateur zones, short wave stations. Other valuable information. Printed in colors; size 3½x4½ ft. Yours free! Send 15c to help with packing and mailing.

WE'VE GOT THOSE HARD-TO-GET RADIO PARTS

You'll be surprised at the many hard-to-get parts we've been able to get for you fellows. Mikes, multi-testers, meters and many other items. They're yours as long as they last. Send for latest flyer. It's full of merchandise you've been trying to get! Stocks won't last long, so write today.




WHOLESALE RADIO LABORATORIES

744 W. BWDY. COUNCIL BLUFFS, IOWA

RCA's New 170-A

Audio Chanalyst

Tests Everything
from Microphones
to Multiple Speakers



THE new 170-A Audio Chanalyst is a combination testing unit which includes the famous Voltomyst circuit, a new diode flat through the audio range, a B.F.O. signal source, a gain calibrated amplifier, and speaker and line output connections.

The various channels of the RCA Type 170-A can be used independently or in unison to check

all common defects in audio amplifiers and sound systems. Polarity indication and a.c. can be determined instantly with the new electronic indicator, without danger of overload!

A pamphlet containing full description and specifications of the 170-A Audio Chanalyst will be sent gladly, on request.

Please use this coupon 

BUY MORE WAR BONDS



Test & Measuring Equipment, Dept. 97-87J
Radio Corp. of America, Camden, N. J.

Please send the bulletin describing the new RCA 170-A Audio Chanalyst to:

Name
Position
Company
Street City.....

RADIO CORPORATION OF AMERICA

RCA VICTOR DIVISION · CAMDEN, N. J.

In Canada:

RCA VICTOR COMPANY, LTD., MONTREAL

RADIO

★ JANUARY, 1945

as our convoys today covered with their radar screen know the location of every ship in their area of the ocean, so peacetime ships will know the existence of everything afloat in their vicinity without, for instance, the intensive effort which the iceberg patrol has had to carry out in years past to spot the presence of these hazards to shipping.

To illustrate his points Dr. Hoadley recently demonstrated a horn type radiator which is analogous to the horn on a loudspeaker; a parabolic reflector analogous to the searchlight, and a klystron oscillator which incorporates the rhumbatron to produce high frequency oscillation. With the klystron oscillator Dr. Hoadley transmitted music from a transmitter to a receiver and also showed how the microwave radio

beam is reflected from an object such as the Palisades. He gave this demonstration with a metallic sheet and again drew the analogy to light which bounces off an object in its path.

WCEMA OFFICERS

Howard D. Thomas, Jr. General Manager of the Packard-Bell Company, Los Angeles, has been elected to the Presidency of the West Coast Electronic Manufacturer's Association, Los Angeles Council, for 1945. The retiring President, H. L. Hoffman, Hoffman Radio Corporation, was elected to the Board of Directors.

Other officers elected were Lew Howard, Peerless Electrical Products Company, Vice President; James L. Fouch, Universal



Howard D. Thomas, Jr.

Microphone Company, Ltd., Treasurer.

Elected to the Board of Directors in addition to Mr. Hoffman were D. A. Marcus of Electronic Specialty Company, Ashford M. Wood, Littelfuse, Inc., and Clay F. Fisher of Radiation Products, Inc.

NEW APPOINTMENTS

A. M. Wiggins


Mr. A. M. Wiggins has been appointed Chief Research Engineer at the Electro-Voice Corporation in South Bend, Indiana.

After having received his BS in Electrical Engineering at the Texas Technological College in 1933 and his MS in E. E. at the University of Texas in 1936, Mr. Wiggins was employed by the Seismic Explorations, Inc., Houston, Texas from 1937



A. M. Wiggins

to 1941. In 1942, he served in the Research Dept. of the RCA Manufacturing Co., in Camden, and later went to the RCA Lab-

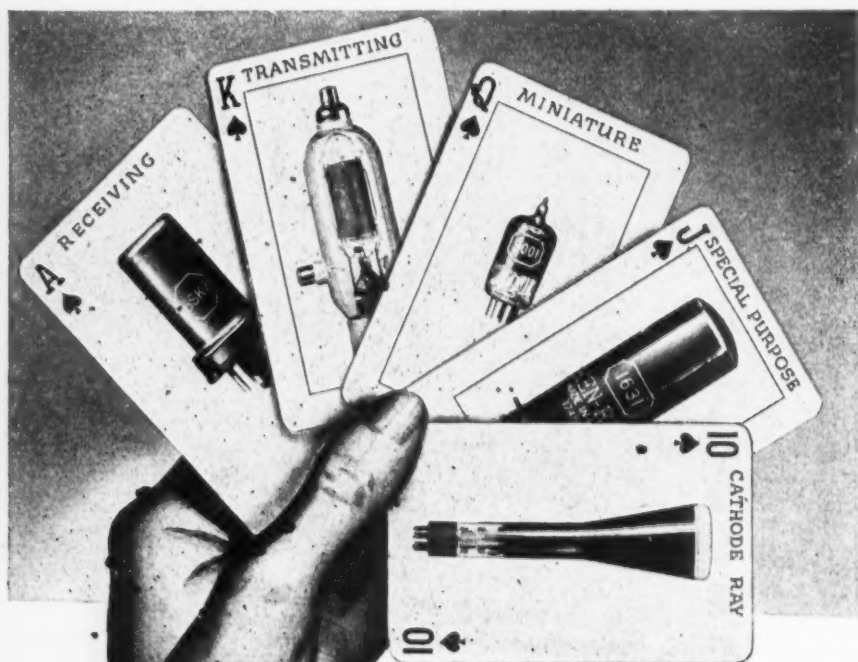

KEN-RAD

ELECTRON TUBES

All Naturals!

• Write for your copy of Essential Characteristics, the most complete digest of tube information available

KEN-RAD

EXECUTIVE OFFICES

OWENSBORO · KENTUCKY

EXPORTS 15 MOORE STREET NEW YORK


TRANSMITTING TUBES SPECIAL PURPOSE TUBES
CATHODE RAY TUBES RECEIVING TUBES

surer.
ctors in
D. A.
company,
nc., and
cts, Inc.

appointed
Electro-
Indiana.
Electri-
ological
E. at
Wig-
Explor-
n 1937

search
Co., in
Lab-

DIO

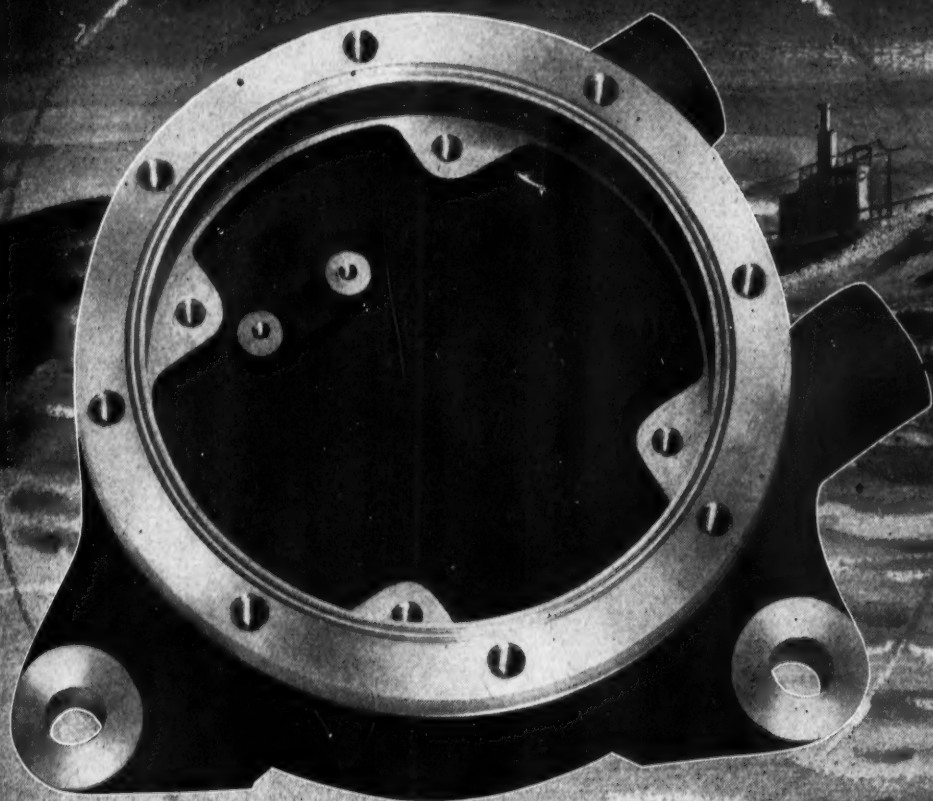


A POSTWAR LOUD SPEAKER?

YES, if you are going to use it on a submarine. But don't expect all Jensen postwar loud speakers to look like this. This one was designed especially to be used on submarines and to withstand the terrific pressure of fathoms of deep sea water and the explosive concussion of depth charges.

Just the same, Jensen Engineers and factory have learned plenty in the process of designing this and many other

specialized speakers for front line operations. Jensen postwar speakers will reflect this experience in the most extensive and improved line of loud speakers ever known. More than ever before, every buyer and user of a loud speaker will find positive assurance of the most advanced art in Jensen products. Intensive specialization for more than 15 years is one good reason for that... Jensen alone can claim that distinction.



Jensen

RADIO MANUFACTURING COMPANY
6601 S. Laramie Ave., Chicago 38, U.S.A.

Manufacturers and Designers of Fine Acoustic Equipment



SM Fractional H.P. Motors for blower, band switching, turntable, and other radio applications.

You can get a SM motor engineered and precision-built to your exact job specifications to give you maximum power per ounce of weight and per inch of space, long life and dependable performance. From 1/10th to 1/200th H.P. Speeds from 3,000 to 20,000 R.P.M. Voltage from 6 to 220 AC-DC. SM motors are built of quality materials in a plant with facilities for large volume production. Many thousands have been designed and built for signal corps and military aircraft use. What are your requirements?

Small Motors, Inc.

Dept. 30—1308 ELSTON AVE., CHICAGO 22, ILL.

Manufacturers of special small universal, fractional H. P. motors, dynamotors, shaded pole motors, heater motors, generators.

Design • Engineering • Production

oratories in Princeton, New Jersey, where he remained until the present time.

Mr. Wiggins' invaluable background in the design of microphones and acoustic devices will be utilized in the research laboratories of the Electro-Voice Corporation, where rapid strides are being made in the design and development of all types of microphones.

Thomas A. White

Jensen Radio Manufacturing Company, well-known manufacturers of loud speakers and acoustic equipment of this city, announced today over the signature of Mr. A. Leslie Oliver, chairman of the board, the appointment of Thomas A. White as president and general manager to succeed W. E. Maxon, retired.

Mr. White who is well known throughout radio and electronic circles, acquired an interest in the company he now heads in 1928, shortly after its organization, becoming sales manager. On January 1, 1940 he was elected to the position of vice-president. Under his sales direction the Jensen company has pioneered many loud speaker innovations and has forged ahead to a position of undisputed leadership in the acoustic field.

Mr. Maxson's resignation was accepted in compliance with his request for retirement after completing fifteen years of service with the Jensen company. He became manager in 1930 and was elected to the office of president and general manager on January 1, 1940. Mr. Maxson will remain on the board of directors and announces he will retain his Chicago

residence and his home at West Mystic, Connecticut.

Dr. Bennett S. Ellefson

Dr. Bennett S. Ellefson has been appointed Assistant to the Vice President in charge of Engineering, Sylvania Electric Products Incorporated. His office is located



Dr. Bennett S. Ellefson

at Sylvania Center, Bayside, Long Island. Associated with the company since 1937, Dr. Ellefson has specialized in research on fluorescent screens, special uses of glass, fluorescent powder for cathode ray tubes and specialized war products. He

The Publishers of **RADIO** Announce the Launching of A New Technical Monthly

CQ →

1st ISSUE

JANUARY 1945

**Covering All Phases of
Amateur Radio,
Communications,
Equipment & Techniques**

SUBSCRIPTION PRICES:


12 issues \$2.50
24 " 4.00
36 " 5.00

In U.S.A. & Poss.
\$3.50 per yr. elsewhere


**NOT FOR SALE
ON NEWSSTANDS**

**ORDER YOUR SUBSCRIPTION
DIRECT FROM**

**RADIO MAGAZINES, INC.
342 MADISON AVE.
NEW YORK 17, N. Y.**

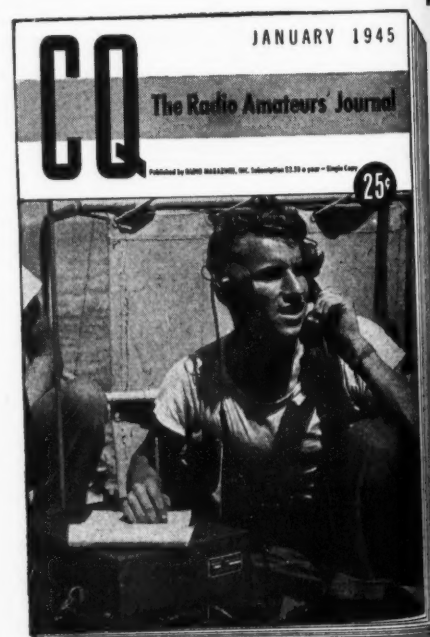

Your Product Designers May Need

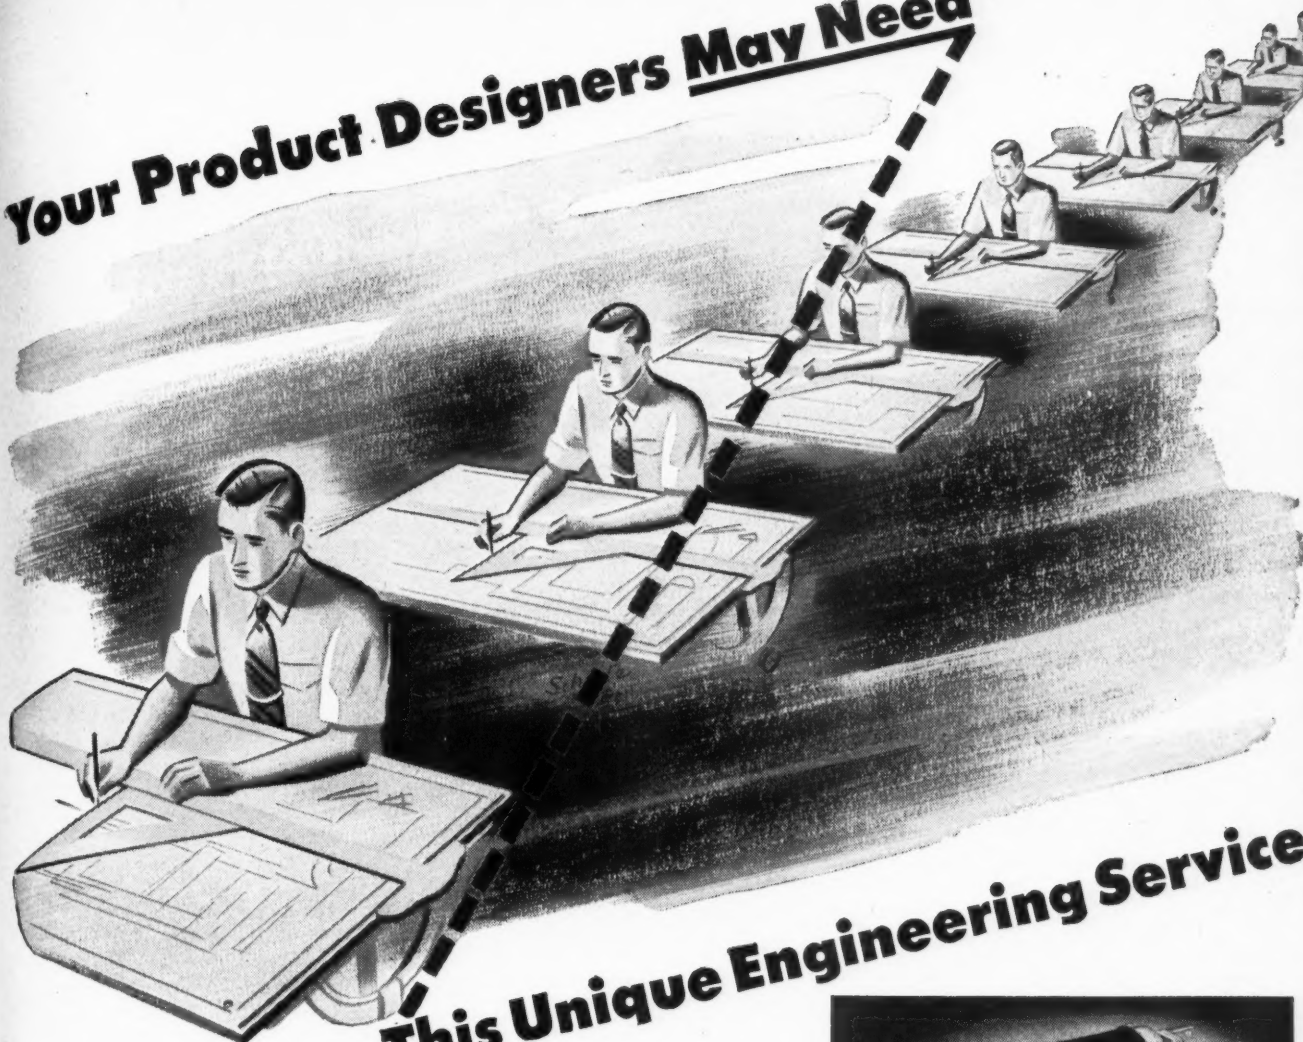


This Unique Engineering Service

There are hundreds of products on drawing boards today that will do a better job at lower cost with the *right* electrical control apparatus. The problem is: precisely what apparatus?

That is where the Automatic Electric field engineer can help. He is a specialist in electrical control, backed by an organization that offers this three-point service:

1. Technical advice by experienced field engineers, who know the "how" and "why" of control technique.
2. A complete range of relays, stepping switches and other control units—time-proved products readily adapted to your needs.
3. A design and manufacturing service for complete engineered assemblies.

Ask our field engineer for a copy of our catalog of control devices. He will be glad to show you how they can serve you.

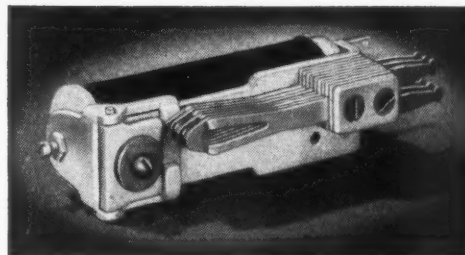

Here are jobs that can be done easier and better with Automatic Electric control devices:

Automatic Selection and Switching of Circuits • Time, Temperature and Sequence Control • Counting and Totalizing • Inspection and Sorting Operations • All Types of Electrical and Electronic Control.

Relays
AND OTHER CONTROL DEVICES
by **AUTOMATIC ELECTRIC**



AUTOMATIC ELECTRIC SALES CORPORATION
1033 West Van Buren Street • Chicago 7, Illinois

In Canada: Automatic Electric
(Canada) Limited, Toronto

PARTS AND ASSEMBLIES FOR EVERY ELECTRICAL CONTROL NEED



CONCORD RADIO CORPORATION'S

New "SPECIAL SUPPLEMENT" HARD-TO-FIND RADIO AND ELECTRONIC COMPONENTS

16 pages crowded with listings and descriptions of such wartime essentials as...

- METERS • VOLUME CONTROLS
- RESISTORS • TEST ACCESSORIES
- SWITCHES • TRANSFORMERS
- SPEAKERS • RHEOSTATS
- RELAYS...and hundreds of others!

Each page overflows with critical parts and equipment . . . urgently needed by industry, laboratories, government agencies, training schools, radio servicemen, military services, etc. Everything is the product of a leading American manufacturer. All are first quality. And all are marked at prices typical of startling Concord values! Hurry! Our edition of these supplements is moving fast. And, since all items are subject to prior sale, we suggest that you wait no longer. Send for your FREE copy today!

Rush this coupon . . . and we will send you the new 16-page Supplement by the fastest possible means.

CONCORD RADIO CORPORATION
901 W. Jackson Blvd., Chicago 7, Ill. Dept. No. F-15

Please rush me the new 16-page "Special Supplement" by Concord Radio Corp

NAME _____

ADDRESS _____

CITY _____ STATE _____

CONCORD RADIO CORPORATION

Calumet Radio Corporation

901 W. Jackson Blvd.
CHICAGO 7, ILL.

265 Peachtree Street
ATLANTA 3, GA.

holds a number of United States and foreign patents on fluorescent materials and glass, including certain special war products.


Prior to joining Sylvania, Dr. Ellefson conducted important research on industrial chemical processes. He is a member of the Institute of Radio Engineers, the American Society for the Advancement of Science, the American Chemical Society, the American Ceramic Society, Phi Kappa Phi and Sigma XI. A native of Canby, Minnesota, he holds a B. A. from St. Olaf College, M. S. from the University of Minnesota and Ph. D. from Pennsylvania State College.

K. C. Burcaw

K. C. Burcaw has been appointed sales manager of the Cornell-Dubilier Electric Corporation, Jobber Division. Mr. Burcaw brings to his new position a wealth of sales experience.

In 1924, Mr. Burcaw together with Mr. Wildberg, incorporated the Radiart Company. After that he represented them in the Michigan, Indiana, Kentucky, Chicago territory. In 1934, he returned to Cleveland to create a Radio Jobber Division for the Radiart Corporation. And as Sales Manager he not only sent sales volume to new highs, but was also instrumental in making the Radiart line an important factor in the jobber field.

Mr. Burcaw is now rounding out plans which will bring to his work at C-D the same intensive selling and aggressive merchandising that marked his successful years at Radiart. Between jobber calls he

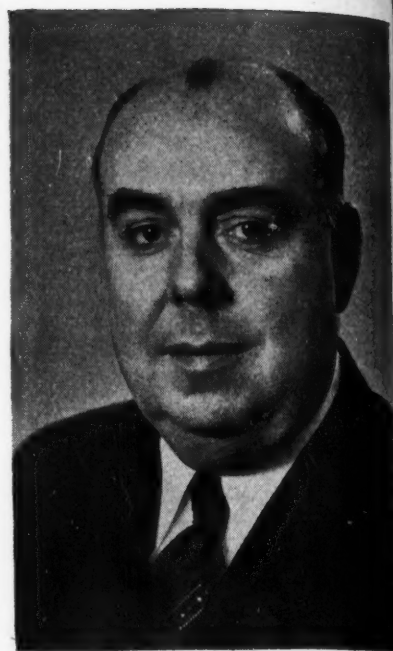

K. C. Burcaw

intends to continue his aviation and "ham" hobbies. He holds the rank of flight officer in the Civil Air Patrol and is the communications officer of his squadron. He has taken part in numerous plane-to-ground two way radio experiments.

Max E. Markell

Max E. Markell, for the past four years chief of the vacuum tube section of the

NO. 51N

NO. 50N

NEWEST DRAKE NEON LIGHT ASSEMBLIES

DEPENDABLE
SERVICE

LONGER LIFE



Drake No. 50N NEON Jewel Min. Bayonet Assembly is ideal where a distinct signal is required and observer is directly in front of instrument panel. Its 1/2" smooth clear jewel magnifies and intensifies the illumination from the Neon lamp. Red glass jewel can also be supplied. The No. 51N (without jewel) is applicable where 180° visibility is desirable. Both units have built-in resistors for NE51 Neon Lamps operating on standard 105 to 125 volt circuits. These rugged units offer BIG savings in power (1/25 watt), long life (3000 hours), wide voltage range, and great reliability.

SOCKET AND JEWEL LIGHT ASSEMBLIES

DRAKE MANUFACTURING CO.

1713 WEST HUBBARD ST., CHICAGO 22, U.S.A.



**"COIL? ALBION CAN SHIP YOU ALL
THE COILS YOU NEED."**

SUPER-QUALITY COILS AT REASONABLE PRICES

More and more every day, the industry is turning to Albion for fast, quality and quantity production of coils, chokes, and transformers. That's because here you benefit from the unbeatable combination of management "know how," skilled workmanship, streamlined facilities, and central location. Your requirements will be given prompt and thoughtful attention.


ALBION COIL COMPANY

ALBION, ILLINOIS

**R. F. AND TRANSMITTING COILS AND CHOKES.
I. F. TRANSFORMERS**

RADIO

★ JANUARY, 1945

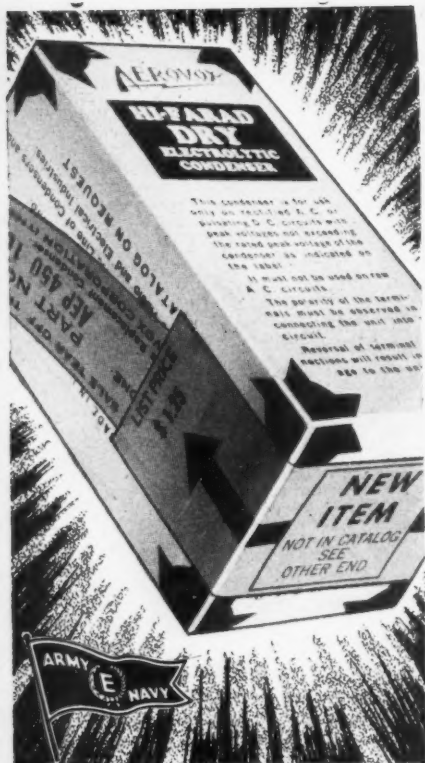

IT WON'T BE LONG, NOW...

• Soon, yes, and probably sooner, you'll see those "New Item" Aerovox cartons back on your jobber's shelves. There'll be many new items, new developments, new refinements in Aerovox capacitors because of wartime experience. And of course there'll be the good old standbys again—types Uncle Sam rounded up for the urgent needs of our fighting men.

Yes, it won't be long now. The moment Uncle Sam releases the gigantic Aerovox production facilities, you can begin counting once more on just the types you need in place of wartime "Victory" substitutes.

• See Our Jobber . . .

Consult him about your immediate and future requirements. Ask for latest catalog—or write us direct.



AEROVOX CORP., NEW BEDFORD, MASS., U. S. A.
In Canada: AEROVOX CANADA LTD., HAMILTON, ONT.
Export: 13 E. 40 ST. NEW YORK 16, N. Y. Cable: "ARLAB"

U. S. Signal Corps at Camp Evans, has joined RCA's Tube and Equipment organization as a specialist on industrial tube applications, according to an announcement by L. W. Teegarden, General Manager of the RCA Tube and Equipment

Mr. Markell will work under the direction of L. S. Thees, Manager of RCA's Equipment Tube Section at the Company's Harrison, New Jersey plant. He will specialize on tube applications for industrial dielectric and induction heating equipment.

Mr. Markell, well known in the industry as technical advisor to the Officer In Charge of Production at Camp Evans, was graduated from the University of Michigan with an engineering degree. He has served as engineer for stations WHN, WNEW and WHOM in New York, and later as an engineer on radio receiver design for the Interstate Broadcasting Company.

Dr. Donald B. Sinclair

The General Radio Company announces the appointment of Dr. Donald B. Sinclair as Assistant Chief Engineer in charge of circuit development.

Dr. Sinclair was born in Winnipeg, Manitoba, in 1910. He attended the University of Manitoba from 1926 to 1929. He received the degree of S. B. from the Massachusetts Institute of Technology in 1931, S. M. in 1932, and Sc. D. in 1935. Prior to joining the General Radio engineering staff in 1936, he was a Research Assistant at M. I. T. from 1932 to 1935, and a Research Associate in 1935 and 1936. Dr. Sinclair is a member of Sigma Xi and a Fellow of the Institute of Radio Engineers.



Dr. Donald B. Sinclair

Charles Knoblauch

The Hallicrafters Company, Chicago, producer of high frequency radio war equipment, recently appointed Charles Knoblauch superintendent of the firm's Clearing plant.

Knoblauch, formerly assistant superintendent of Hallicrafters' 26th street plant, has been with the company for more than six years. He has been engaged in radio production work for the past seventeen years.



THERMOSTATIC METAL TYPE DELAY RELAYS

PROVIDE DELAYS RANGING
FROM 1 TO 120 SECONDS


Other important features include:—

1. Compensated for ambient temperature changes from -40° to 110°F .
2. Contact ratings up to 115V-10a AC.
3. Hermetically sealed — not affected by altitude, moisture or other climate changes . . . Explosion-proof.
4. Octal radio base for easy replacement.
5. Compact, light, rugged, inexpensive.
6. Circuits available: SPST Normally Open; SPST Normally Closed.

WHAT'S YOUR PROBLEM? Send for "Special Problem Sheet" and Descriptive Bulletin.

AMPERITE CO. 561 BROADWAY
NEW YORK 12, N. Y.

In Canada: Atlas Radio Corp., Ltd.
560 King St. W., Toronto

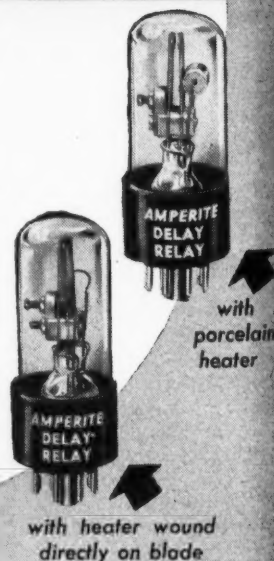

...Hardly had man learned to fly than he began to feel the urgency of the need to communicate between ground and plane.



One of the first successful attempts in such two-way contact was accomplished with equipment designed and manufactured by *Connecticut Telephone & Electric*.

Since the early days of the telephone, our people have been identified with progress in communications. Today the principles of communications have applications of the greatest importance to industry, in connection with product development and production control.

Our developmental engineers also have much to offer to industrial executives seeking to produce a better product at lower cost. If our engineering and production facilities might tie in with your plans, we shall be happy indeed to talk with you.

CONNECTICUT TELEPHONE & ELECTRIC DIVISION

GREAT AMERICAN INDUSTRIES, INC.
MERIDEN, CONNECTICUT

TELEPHONIC SYSTEMS • SIGNALLING EQUIPMENT • ELECTRONIC DEVICES • ELECTRICAL EQUIPMENT • HOSPITAL AND SCHOOL COMMUNICATIONS AND SIGNALLING SYSTEMS • IGNITION SYSTEMS




Radio headsets are one of C. T. & E. Division's contributions to aviation communications in World War II.

HARVEY

has for
Immediate Delivery

- American War Standard Meters in all different ranges — microammeters, milliammeters, ammeters, voltmeters, db. meters, portable instruments, etc.

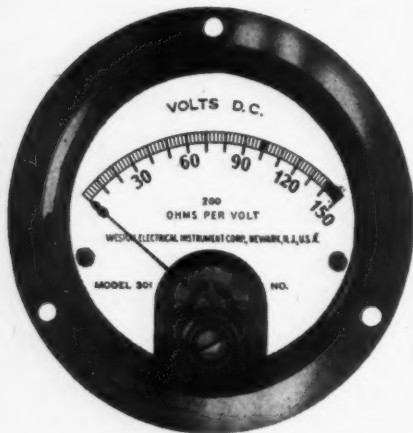

Illustrated is the Weston Model 301, just one example of the wide variety of famous make meters available at HARVEY'S.

- Mica Capacitors with 2%, 5%, 10%, or 20% tolerance to American War Standards. Also in stock are oil and electrolytic condensers.

- Precision carbon or wire wound resistors.

- 10 and 50-watt ceramic sockets.

... and hundreds of other critical radio and electronic components.

HARVEY is the complete radio and electronic supplier. Locating hard-to-find parts is but one of our many plus-services. We are prepared to answer your technical questions ... to advise you about priorities. Fast deliveries to any point in the United States.

Don't forget...

HARVEY also carries distinguished **AUDAK** equipment... cutters, jewel points, and pick-ups preferred by broadcasting stations and recording studios.



This merchandise available with suitable priority. Write, phone: **LONGacre 3-1800**

HARVEY
RADIO COMPANY
HARVEY
103 WEST 43rd ST., NEW YORK 18, N. Y.

NEW PRODUCTS

[Continued from page 41]


rheostats formed of carbon disc piles. Simply by changing the pressure applied to these piles, every possible resistance value within their range is made available without opening the electrical circuits in which they are connected. The pressure to vary the resistance to the most critical adjustment may be applied electrically, mechanically, centrifugally or hydraulically. Uses range from both generator and line voltage regulator applications to remarkable speed control through governed field current on motors. Many other projects incorporating the Carbon Pile Resistor are now in the development stage.

Stackpole regularly supplies Carbon Piles in practically any length pile and diameter required. Available resistance ranges have been materially expanded, and a greater degree of resistance variation may now be obtained in a pile of given size. Careful engineering control of manufacture assures a high degree of uniformity on a quantity production basis. Typically, a Carbon Disc Pile 1½" long composed of discs .432" in diameter permits a resistance range of from 60 ohms with 1 oz. pressure to .3 ohms at 32 lbs. pressure. Bulletin giving complete engineering data will be sent on request to the manufacturer.

CENTER CONTACT RECTIFIER

Center Contact, a patented plate construction in metal-plate rectifiers which allows complete coating protection against destructive atmospheres, is available in units now being manufactured by Selenium Rectifier Products, Federal Telephone and Radio Corporation, Newark, New Jersey.

Developed especially for use in equipment being manufactured for the Army

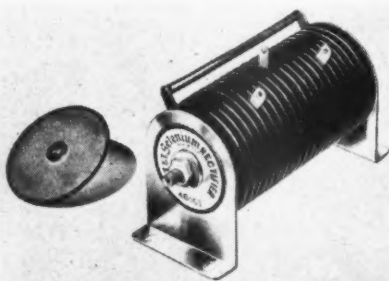


and Navy, this type of construction permits a new method of applying protective coatings to metal-plate rectifiers. Where the standard petal contact is sprayed with a protective coating, Center Contact is especially adapted to the application of a heavier and better coating to protect the rectifier from fungus-bearing, salt spray laden or corrosive atmospheres. In such applications, the metal plate rectifiers are necessary as other types of rectifiers cannot be completely protected against such destructive conditions.

The Center Contact construction is available in the same range of sizes and capacities as the standard petal-type contact.

TECH
LABORATORIES

MEASURES QUANTITIES

with greater sensitivity & range than ever before accomplished

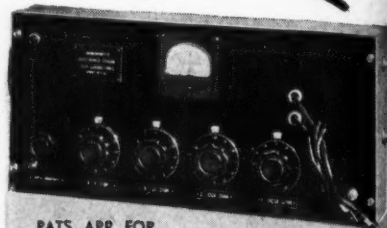

PATS. APP. FOR

TECH LAB MICROHMMETER

... gives direct and instantaneous readings of resistance values down to 5 microhms and up to 1,000,000 megohms. Accuracy in all measurements to better than 2%. Output is sufficient to drive recorder. Entirely AC operated. Furnished in two models. Reasonably prompt deliveries. For complete data regarding other applications write for Bulletin No. 432.



Quality manufacturers of attenuators and other electrical resistance instruments. For complete data write for Bulletin No. 431.

TECH
LABORATORIES

13 LINCOLN STREET
JERSEY CITY 7, N. J.

PAN AMERICAN USES EIMAC TUBES



Pan American World Airways, which has done so much to advance the war-time goals of the nation, has just announced a plan for a new service to South America. Employing a fleet of stratosphere planes, carrying 108 passengers, flying at more than three hundred miles an hour, Pan American proposes to take travelers from New York to Rio de Janeiro in less than twenty hours instead of the present sixty-six hours, charging \$175 for the trip, as against the current rate of \$491.

Pan American Airways and all its associated and affiliated companies, which comprise the P. A. A. World System, have been using Eimac tubes in the key sockets of all ground stations for a number of years.

Because of the extensive operations of Pan American World Airways, these tubes have been subjected to about every test possible—altitudes; ground level; extremely cold climates and high temperatures found at the equator; conditions of high and low humidity; and in some instances, when new bases are being built, perhaps somewhat trying power conditions. The high regard which P. A. A. engineers have for Eimac tubes is clearly evidenced by their continued and more extensive use, as the years roll by.


The fact that Eimac tubes are the number one favorite of the commercial airlines is important evidence to substantiate the oft repeated statement that "Eimac tubes are first choice of leading electronic engineers throughout the world."

Follow the leaders to





EITEL-McCULLOUGH, INC., 947 San Mateo Ave., SAN BRUNO, CALIF.
PLANTS LOCATED AT: SAN BRUNO, CALIFORNIA AND SALT LAKE CITY, UTAH

Export Agents: **FRAZAR & HANSEN, 301 Clay Street, San Francisco, California, U. S. A.**

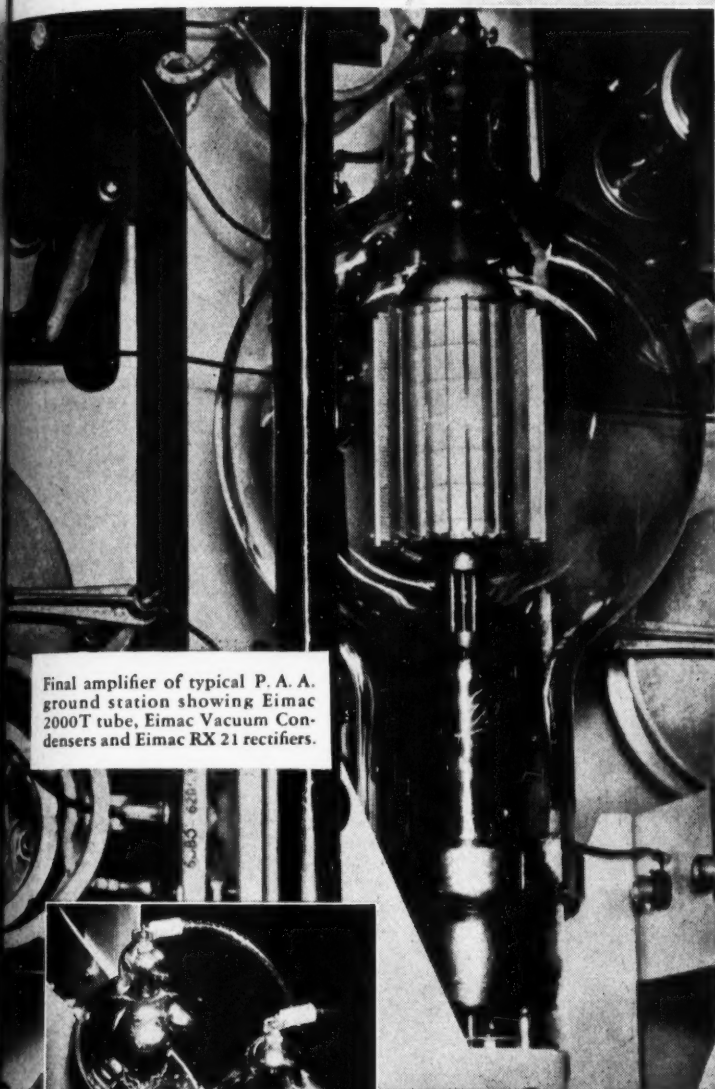

Final amplifier of typical P. A. A. ground station showing Eimac 2000T tube, Eimac Vacuum Condensers and Eimac RX 21 rectifiers.

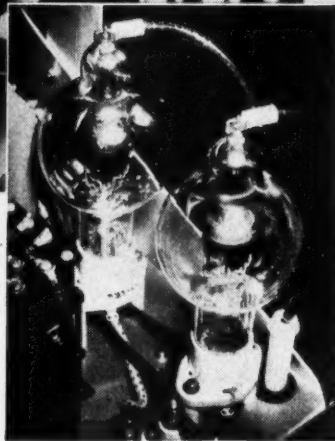

Write for your copy of *Electronic Teletext*—a 64 page booklet fully illustrated—covering fundamentals of Electronics and many of its important applications. Written in layman's language.


Take a **TURRET TERMINAL LUG**
LIKE THIS...



Swage it to the Board
LIKE THIS...



**And in a jiffy you have
a good, firm Turret Terminal**



It's as simple as that with these heavily silver plated C. T. C. Turret Terminal Lugs. Quick soldering, too. Sufficient metal is used to give them strength but there's no surplus metal to draw heat and increase soldering time.

C. T. C. Turret Terminal Lugs are stocked to meet a wide range of board thicknesses. Order them from


CAMBRIDGE THERMIONIC CORPORATION

454 CONCORD AVENUE

CAMBRIDGE 38, MASSACHUSETTS

CINAUDAGRAPH SPEAKERS

*Engineered for Today's
Big, Precision Job!*

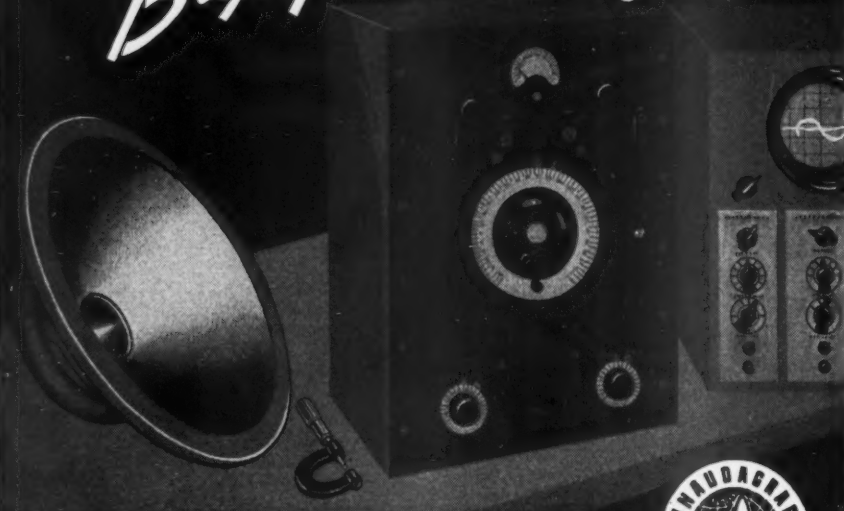

Cinaudagraph Speakers, Inc.

3911 S. Michigan Ave., Chicago

"No Finer Speaker Made in all the World"




It retains the features of high voltage per plate, ability to withstand heavy temporary overloads and operates at high efficiency over a wide range of capacities with no maintenance expense.

CARTER HAND GENERATOR

A one-man hand generator delivering about 40 watts has been released by Carter Motor Company, 1608 Milwaukee Avenue, Chicago, it was announced by Robert W. Carter, Managing Director of the firm.

It is developed around the original Carter magmotor, and is a unit with permanent magnet fields which save about 10-watts of primary power usually associated with the hand generator type of rotary equipment. The generator provides 8 volts DC at 5 amperes for charging batteries, where other charging apparatus is not available.

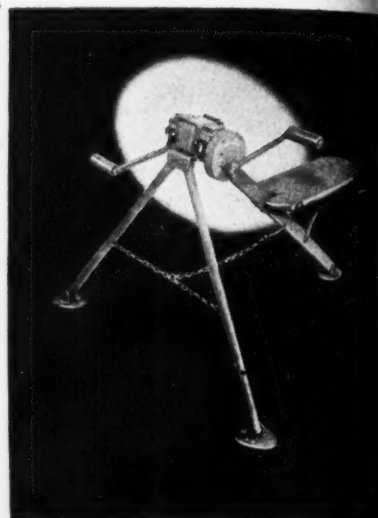

One man, seated on the seat which folds up when not in use, turns two cranks (of special construction to prohibit their being detached through anti-axial strains) which are immediately demountable with no tools required. Drive is by means of a gear train, one of which is bakelite to create a smoother and quieter operating unit.

The hand generator is moisture-proof and the shafts of the crank handles are sealed and the unit is completely enclosed. Output is to two terminals to which the charging line is connected. A chain suspended between the legs prevents collapse when the unit is set up. Because of the use to which the generator is intended, no filters are included. Neither is a meter provided since the batteries are not capable of being over-charged by turning the cranks.

While the units are now being manufactured only for the Military and allied services, a wide range of peace-time consumers are expected, among which are field expeditions, yachtsmen (to charge their ship's batteries), remote radio stations, farmers and ranchers, it was stated.

CAPACITOR CATALOG

To provide designers, experimental engineers, and production executives with a practical, working selection of ceramic

voltage per
temporary
h efficiency
es with an

delivering
released by
Milwaukee
nounced by
Director of

ne original
unit with
save about
ally associ-
or type of
or provides
or charging
g apparatus

which folds
cranks (or
their being
ins) which
with a
means of a
bakelite in
operation

sture-proo
andles are
y enclosed
which the
chain su-
ts collapse
of the ex-
tended, and
s a mech-
not capable
urning the

eing mis-
and allow
-time cor-
which are
to char-
io station
ated.

mental ex-
ives with
of ceramic

RADIO

RADIO

★ JANUARY, 1945

59

"Have you seen this dope on Bridgeport?"

"Yes. That's the company that's going to get our coil business after the war. Right now they're turning out search coils and variometers for the army by the carload."

HERE'S MORE DOPE ON BRIDGEPORT:



After V-Day, the same personnel that meet the most exacting military specifications and the same capacity that enables Bridgeport to produce search coils and variometers in the quantities necessary for our Armed Forces will be your assurance of quality and service.



Bridgeport's central location, right near the center of population, gives you fast, trunk line service to any point in America. Write to us TODAY to insure early postwar delivery of R. F. coils and chokes, I. F. transformers and transmitting coils and chokes.


BRIDGEPORT

MANUFACTURING COMPANY
Bridgeport, Illinois

R. F. Coils • R. F. Chokes • I. F. Transformers
Transmitting Coils • Transmitting Chokes

SIGMA SENSITIVE RELAYS

ASSURE *Positive* CONTROL

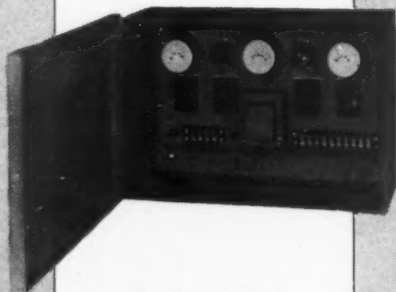

Designed by
Arthur T. Hatton & Co.
of Hartford, Conn.

This Electronic Motor Controller employs Sigma Relays in pre-adjusted timing circuits.

Applied to a stationary motor, it provides reliable control from an overhead crane . . . by way of a beam of light.

Many similar installations are successfully operating today . . . have you a problem which requires positive control?

Perhaps Sigma Relays will help you solve a difficult control problem.

SIGMA
Sigma Instruments, Inc.
Sensitive RELAYS
66 CEYLON ST.,
BOSTON 21 MASS.

capacitors, the Electrical Reactance Corp. of Franklinville, N. Y., have prepared a handbook that contains 81 standard rating ceramic capacitor samples.

In addition to actual working samples, this catalog includes plant illustrations which show the manufacturing processes and testing methods including the application of solid silver for condenser plates, which the manufacturer claims is non-ageing, non-corrosive and maintains excellent conductivity. An A. S. A. Color Code included in this handbook makes its reference value complete.

MICARTA 444

A new Westinghouse plastic, known as Micarta 444, combines the desirable molding properties of thermoplastic materials and the good physical characteristics of thermosetting materials. A modification of the resin in standard Micarta causes the substance to soften when hot, as do thermoplastic materials, but at a much higher temperature, about 300 degrees F, which is far above the service range. Thus the new Micarta can be heated and pressed into deep-drawn and complicated shapes. The pressures are lower—about 50 to 100 pounds—and the times much shorter than required for curing of thermosetting resins. Dies can be made of hard wood or of thermosetting laminates. This makes the manufacture of a relatively small number of parts from a single die economical as the cost of these parts is not loaded with the distributed cost of an expensive die.

When cool the product has the good strength and freedom from embrittlement characteristic of many thermosetting materials. Used in aircraft for nonstructural and semistructural members, a weight saving of some 50 percent over a comparable volume of metal has been achieved. In addition, a considerable saving in man-hours of labor has been made. In one particular operation, a single sheet of formed Micarta replaced an airplane part formed of four separate pieces of aluminum. The aluminum sections were welded together. Forty inches of weld were saved which contributed to the one and one-fourth man-hours required for the aluminum part. The formed Micarta part requires 19 minutes to produce and weight but half as much. These savings indicate the possibilities afforded by the material in applications where good insulating qualities, high impact strength, and good thermal stability are required.

CORRECTION

We regret that the three cuts used to illustrate the item regarding inverted triode applications, appearing in the Technica section of the December 1944 issue, were not the proper ones for this article. They were intended to illustrate the item on the effect of high temperature solders on copper wire, appearing on page 68 of this issue.

We extend our apologies to our readers and to the authors involved.

Another DX FIRST!



For more than a year DX Crystals have been automatically deep-etched by a new process. Both the method and machines were perfected by DX Engineers so that all DX Xtals can have the nth degree of stability and endurance necessary to wartime operation.

Think about DX Products for your new receivers and transmitters.

DX CRYSTAL CO.

GENERAL OFFICES: 1200 N. CLAREMONT AVE. • CHICAGO 22, ILL. U. S. A.



BELL TELEPHONE LABORATORIES

*Exploring and inventing, devising and perfecting for our Armed Forces
at war and for continued improvements and economies in your telephone service*

RESEARCH, in the Bell Telephone System, has always been an expanding activity, growing with the scientific knowledge of the times and contributing to that knowledge. Upon it have been based important inventions and developments.

The telephone, itself, was invented in the laboratory where Alexander Graham Bell was carrying on researches in speech and hearing and laying the foundation for the electrical transmission of speech. As time went on the telephone research program expanded to cover every science which gives any promise of improved telephony and every engineering art which applies to the development, construction, installation and operation of telephone facilities.

These researches and development studies now cover electrical communication of speech—both by wire and by radio—the transmission of pictures (television)—and many important projects for war.

There Is No End to Progress

Every new research gives rise to new inventions and to new lines for development and design. New inventions indicate new lines for more research. Research and development work, invention and design go hand in hand. In the early years, this work was carried in part by the American Telephone and Telegraph Company and in part by the Western Electric Company, the manufacturing unit of the Bell System.

For many years, however, this work has been assigned to a specialized unit, Bell Telephone Laboratories, Incorporated. Theirs is the responsibility for the technical future of the industry. They carry their developments from the first faint glimmerings which basic researches disclose to the final design of equipment and the preparation of specifications for its manufacture. And after manufacture and installation, they follow their products in operation; and continue development work to devise still more perfect

equipment, less expensive, more convenient and of longer useful life.

These policies and procedures of Bell Telephone Laboratories are distinguished by two characteristics. In the first place the Laboratories design for service. The consideration is not the profit of a manufacturer through first sales and replacement models but the production of equipment which will give the best service at the lowest annual cost when all factors are considered, such as first cost, maintenance, operation, and obsolescence. The Laboratories make no profit and the equipment they design is owned and used by the telephone companies; and the emphasis is upon that use.

Organized Co-ordinated Research

In the second place the Laboratories design always with reference to the complete communication system in which the particular equipment is to play a part.

Reliable, economical telephone service, which is the product of its efforts, is not so much an assemblage of excellent apparatus as it is an excellent assembly of co-ordinated equipment—all designed to work together reliably and economically for a larger purpose.

It is not enough that Bell Laboratories shall design a new piece of electronic equipment which has merit or a new cable or telephone receiver. They must design with reference to all the other parts of the communication system so that the co-ordinated whole will give the best possible service.

4600 People in Bell Laboratories

Bell Laboratories contributions to the Armed Forces derived in large part from the technical background that the Laboratories had acquired through their steadily maintained program of research. The Laboratories had special knowledge, skill and techniques which could instantly be diverted to war problems.

At the time of Pearl Harbor, over a quarter of the 4600 people in the

Laboratories had twenty or more years of service. This breadth of background made possible many engineering developments outside the strict field of communication and these have been of value to the Armed Forces. So far the Armed Forces and the O.S.R.D. have engaged the Laboratories on over a thousand major projects. The majority of these assignments have been completed; and have contributed to our victories on many fronts.

Most of the Laboratories developments, of course, have been in the field of electrical communication. Communication, not simply between individuals as in ordinary telephony, but between mechanisms—as in the electrical gun director. The Laboratories techniques and electronic researches have produced many secret weapons for our country's Armed Forces.

Leader in Electronic Development

For those problems the Laboratories had a remarkable background of experiences in research and development. In World War I, they pioneered by developing radio telephone systems for talking between planes and between planes and ground stations. They also contributed methods and devices for locating enemy planes, submarines, and artillery.

In this war, Bell Laboratories have pioneered in the field of electronics. The Western Electric Company, which manufactures the designs of the Laboratories, is the largest producer of electronic and other war communication equipment in the United States and is now engaged almost exclusively in the manufacture of this equipment.


In war, Bell Telephone Laboratories devote their work to the needs of our Armed Forces. In peace, they are constantly exploring and inventing, devising and perfecting for continued improvements and economies in telephone service. Centralized research is one of the reasons this country has always had "the most telephone service and the best at the least cost to the public."

BELL TELEPHONE LABORATORIES



RADIO

★ JANUARY, 1945

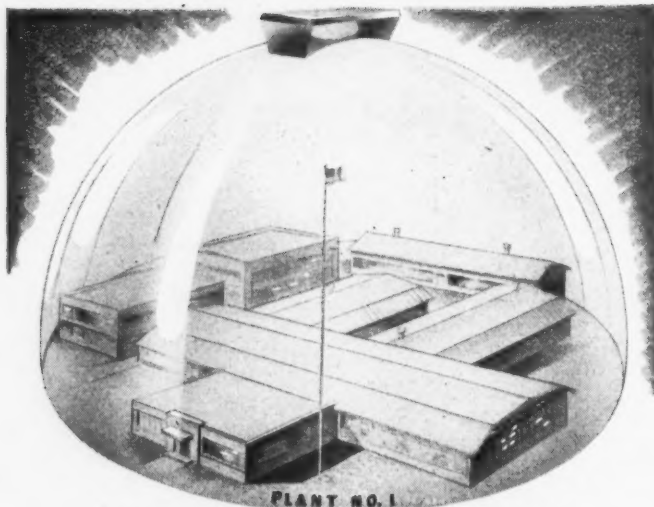

"DUSTLESSTOWN, OHIO"

• It's the little things that loom biggest in the manufacture of delicate electrical measuring instruments. Little things like specks of dust or breath condensation can play havoc with accuracy. That's why Triplett Instruments are made in spotless manufacturing departments; why the air is washed clean, de-humidified and

temperature controlled; why every step in their mass production is protected. As a result Triplett Instruments perform better, last longer and render greater service value.

Extra care in our work puts Extra Value in your Triplett Instrument.

*Precision first
...to last*

Triplett

ELECTRICAL INSTRUMENT CO. BLUFFTON, OHIO



TWO BOOKS EVERY ENGINEER NEEDS

THE CATHODE-RAY TUBE AT WORK by John F. Rider




The cathode-ray tube is the most universally used device for research, engineering and maintenance in the radio and electrical fields.

In using this device to its fullest capabilities, it is necessary to understand its theory and functioning. This book presents a complete explanation of the various types and what role each element within the device plays. Different types of cathode-ray oscillographs are discussed.

More than half the book is devoted to the practical applications illustrated with unretouched photographs of actual oscillographs.

338 PAGES . . . 450 ILLUSTRATIONS . . . \$4.00



A-C CALCULATION CHARTS

This book is a tremendous time saver for engineers and others who work on electrical communication and electrical power problems. Faster than a slide rule. It covers all alternating current calculations in series circuits, parallel circuits, series-parallel and mesh circuits, at frequencies from 10 cycles to 1000 megacycles. 146 Charts—7" x 11"—Two colors—\$7.50.

JOHN F. RIDER Publisher, Inc.
404 Fourth Avenue, New York 16, N. Y.

Export Division:
Rocke Int. Corp.
13 E. 40th Street
New York City
Cable: ARLAB

TRANSMITTERS

[Continued from page 21]

erating frequency, as radiation efficiency may be greatly reduced by this condition. Although it has been found generally advisable to select a building as tall as possible relative to other buildings, certain factors sometimes arise, especially in buildings of several hundred feet in height, that cause troublesome conditions. It has been shown that on some high roof-top installations, extremely good antenna efficiency prevails, but in other cases the reverse condition results. It is always advisable to set up a test transmitter at the proposed roof-top location in order to predict the antenna performance.

References

For the convenience of readers interested in detailed studies of all phases of the choice of transmitter sites, the following references are listed:

1. Standards of Good Engineering practice. FCC.
2. William B. Lodge, "Selection of Radio-Broadcast Transmitter Location", *IRE Proceedings*, October 1939.
3. Glenn D. Gillett & Marcy Eager, "Some Engineering and Economic Aspects of Radio-Broadcast Coverage", *IRE Proceedings*, February 1936.
4. P. E. Patrick, "Service Area of Medium Power Broadcast Stations", *IRE Proceedings*, Sept. 1942.
5. William A. Fitch and William S. Duttera, "Measurement of Broadcast Coverage and Antenna Performance", *RCA Review*, April 1938.
6. Edgar H. Felix, "The Use of Field-Intensity Measurements for Commercial Coverage Evaluation", *IRE Proceedings*, July 1944.
7. R. F. Guy, "Engineering Factors Involved in Relocating WEAJ", *RCA Review*, April 1941.
8. R. Brown and G. D. Gillett, "Distribution of Radio Waves from Broadcasting Stations over City Areas", *IRE Proceedings*, August, 1924.
9. Allocation Survey, FCC Report 18108, Sept. 1, 1936.
10. R. Brown, De L. K. Martin and R. K. Potter, "Some Studies in Radio-Broadcast Transmission", *IRE Proceedings*, February, 1926.
11. F. E. Terman, "Radio Engineers' Handbook", McGraw-Hill Book Co. 1943.

Address Change?

Notify the Circulation Dep't of RADIO at least 3 weeks before you change your address

OSCILLATOR


[Continued from page 29]

ing $R = 250 \text{ K}$, k is about .18, thus $R1$ is approximately 45 K. Referring back to Fig. 3, we find that $\rho = 3.1\%$ so that a gain of 32.2 is necessary to overcome network loss. If it is desired to set the oscillator to exactly 1000 cps



History of Communications. Number Thirteen of a Series

MILITARY RADIO COMMUNICATIONS

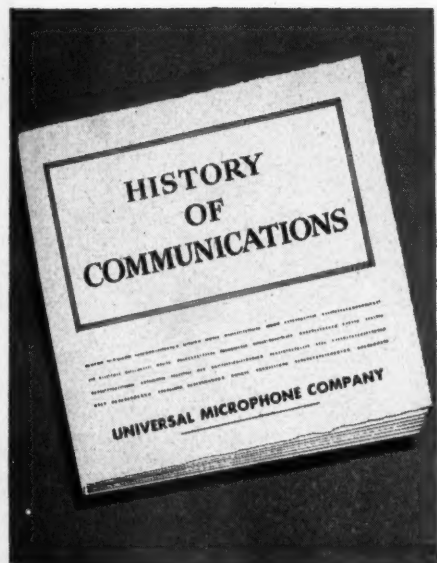

Today the allied military radio equipments represent the "tops" in engineering design. Progress from the spark transmitter of World War I to present-day equipment is, indeed, a far cry. Taking up where they left off December 7, 1941, Universal Engineers, with their added experience with precision military equipment, shall produce for the public, electronic devices not of fantastic design — but of proven utility and quality.

After Victory is ours, radio amateurs, affectionately known as "hams," will be back after their experience with military radio equipment with an even greater desire to operate their own "rigs." It will be then that Universal will again have Microphones and recording components available on dealers' shelves.


< FREE—History of Communications Picture Portfolio. Contains over a dozen pictures suitable for office, den, or hobby room. Write for your "Portfolio" today.

UNIVERSAL MICROPHONE COMPANY
INGLEWOOD, CALIFORNIA



FOREIGN DIVISION: 301 CLAY STREET, SAN FRANCISCO 11, CALIFORNIA • CANADIAN DIVISION: 560 KING STREET WEST, TORONTO 1, ONTARIO, CANADA

RADIO ★ JANUARY, 1945

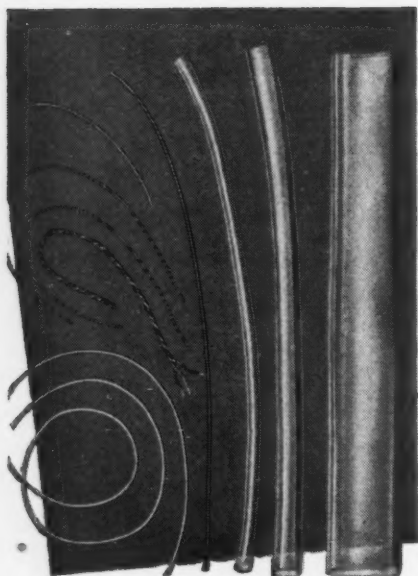

"SURCO AMERICAN" Plastic Insulation *fills every one of your specifications*

You need only to list your specifications to obtain exactly the qualities you require in "Surco-American" Flexible Plastic Tubing. Our own formulations, are rigidly tested to withstand the widest range of conditions, temperature extremes, non inflammability, ageless durability, maximum flexibility; proof against moisture and all kinds of weather. Available in continuous lengths, inside diameters from .005 to 2", packed exclusively to maintain original round form. Other features of "Surco-American" formulations are non fogging, high insulating resistance, dielectric strength which averages 1500 volts per mil. thickness, resistant to abrasion, clear and in all colors. "Surco-American" tested products also include: flexible plastic insulated wire in all colors and sizes, insulating tape, special tubing and wire. Complete technical data.

Surprenant
ELECTRICAL INSULATION CO.

Dept. J.

84 PURCHASE ST.

BOSTON

MASS.

then R_1 would be a rheostat set to the correct value.

For a second example, suppose we have a three gang insulated shaft condenser, 350 mmf maximum and 35 mmf minimum per section. It is desired to build a 5 kc to 50 kc oscillator. Referring to the nomograph we find X_c to be 93 K. Using $R = 200$ K and R_1 a 25 K rheostat our network would be complete. With C set for maximum capacitance R_1 would be about 15 K. The frequency range of the oscillator could be changed to 4 kc to 40 kc by merely changing R_1 .

In order to get a good sine wave from this type oscillator, the overall gain should be slightly over unity. Thus when the attenuation of the network varies the gain must be controlled. This can be done with a manual control, degeneration from an unbypassed cathode resistor, or by a suitable automatic gain control. The attenuation of the network does not vary when the three condensers are changed together in a gang. The gain needs readjustment only when k is changed.

All the calculations in this paper are based on the assumption that the 180° phase shift is in the network. Considering that the phase shift in the plate and grid circuits are negligible is permissible in this case.

A typical circuit is given in Fig. 1b. The 10K rheostat in the cathode of the tube is the degeneration control. Frequencies from 0.8 cps to 860 kcs were observed.

SPECIFICATIONS

[Continued from page 33]

engineering approved sample." This has advantages in that an actual sample may be used for calibration of the suppliers test equipment, however, through constant handling the approved sample is often damaged and could result in the supplier unknowingly building inferior parts.

In order to distinguish parts made by different manufacturers it is standard practice to assign a code letter or number to each supplier. All drawings, where applicable, should include a note to the effect that this identification is to be plainly marked on each component. Such a system is an aid in checking the source of supply of a defective part. The main thought to keep in mind is that the supplier must produce his parts

from the information given on the drawing or associated specifications. The designer should therefore consider the drawings from the manufacturers point of view. He should mentally go through the process of building the part from start to finish, not forgetting such problems as inspection or testing. If after doing this no points need clarification it is safe to assume the drawings to be complete.

To cover thoroughly the specification of component parts would require a small-sized book on the subject. In order to simplify the problem, a series of five tables which indicate the desired specifications for a particular type of electronic equipment have been prepared. Such tables, of course, can only serve as a guide since it is obviously unnecessary to specify each item mentioned. However, unless each item shown is considered carefully the chances of inadvertently omitting one is very great.

Tests

The measurement of component parts has been thoroughly covered in the literature as to methods,¹ so no detailed discussion will be given at this time. But it is important as mentioned previously, that every detail shown on the drawing or specification be checked and a record made of the results. All test conditions, particularly electrical, should be noted, such as temperature, humidity, voltage, frequency, circuit parameters, etc. Without complete records as to the conditions of test the results are of little value so do not trust to memory.

Conclusion


In conclusion let us summarize briefly the technique of component specification.

1. Give only pertinent data on construction.
2. Specify as wide tolerances as permissible.
3. Specify electrical performance in as simple a manner as possible.
4. Indicate methods of testing where required.
5. Mentally fabricate the part from the information on the drawing or specification.

¹Measurements in Radio Engineering—Terman—McGraw-Hill Book Co.

Ted McElroy
World's Largest Manufacturer of
Wireless Telegraphic Apparatus
COMPLETE CENTRAL OFFICE EQUIPMENT
McElroy Manufacturing Corp.
82 Brookline Avenue • Boston, Massachusetts

Ceramics for ELECTRONIC TUBES by STUPAKOFF

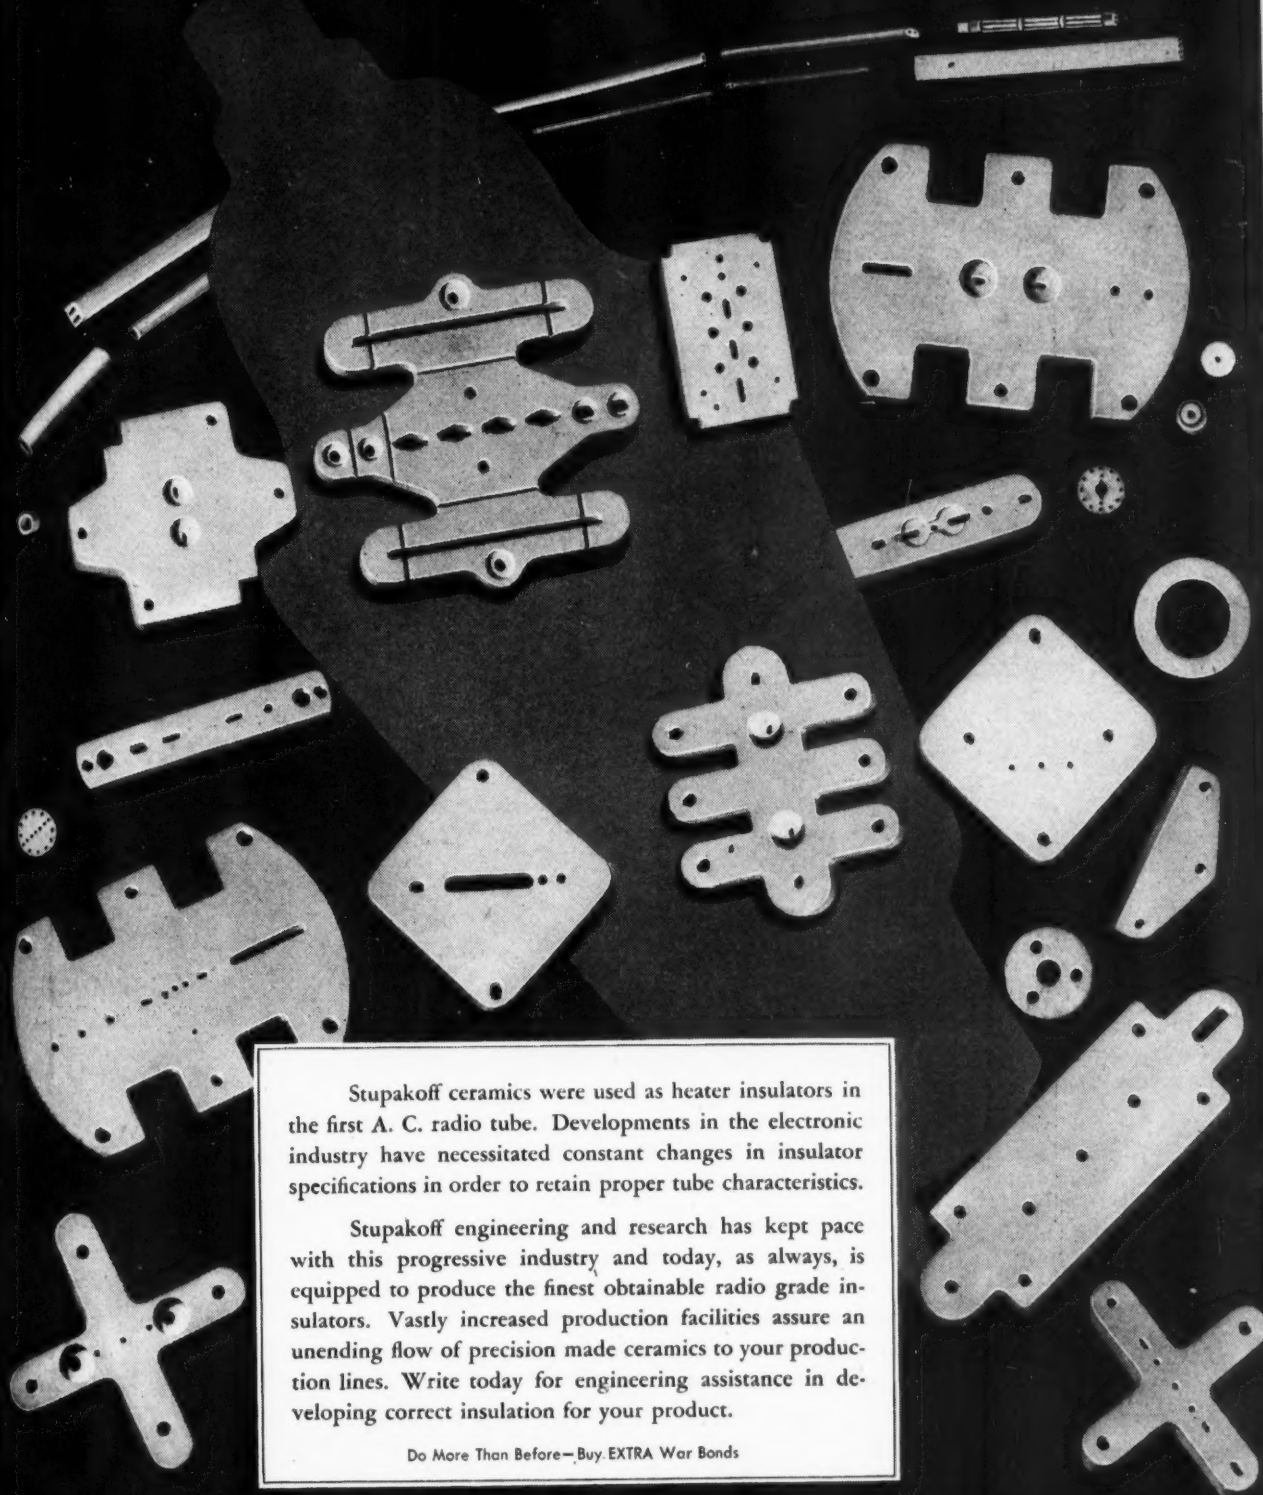

Stupakoff ceramics were used as heater insulators in the first A. C. radio tube. Developments in the electronic industry have necessitated constant changes in insulator specifications in order to retain proper tube characteristics.


Stupakoff engineering and research has kept pace with this progressive industry and today, as always, is equipped to produce the finest obtainable radio grade insulators. Vastly increased production facilities assure an unending flow of precision made ceramics to your production lines. Write today for engineering assistance in developing correct insulation for your product.

Do More Than Before—Buy EXTRA War Bonds



STUPAKOFF CERAMIC AND MANUFACTURING CO., LATROBE, PA.

Ceramics for the World of Electronics

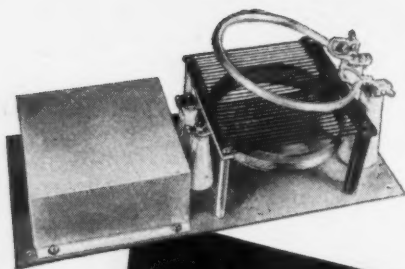

SAMPLING TRANSFORMERS

One model is available for phase monitoring with directional antenna systems. Easy to install and adjust. Results are more constant and installation and maintenance much simpler than with other sampling methods.

Another model is widely used for remote metering, giving antenna current at the antenna instead of at the transmitter. Write today for more information and prices.

JOHNSON
a famous name in Radio

E. F. Johnson Co. Waseca, Minn.

RADIO RECEIVER ENGINEERS!

"Are you making plans today for your position of tomorrow? We have a definite postwar program in home radio and have openings for several engineers with prewar experience in complete design of home allwave receivers. Write personnel Manager

MAGUIRE INDUSTRIES, INC.

Electronics Division
342 W. Putnam Ave., Greenwich, Conn.

WANTED DEVELOPMENT ENGINEERS

Mechanical and electrical. Graduate or equivalent training. Required for development work in the following branches:

1. Electro-mechanical devices, communication systems. Must be interested in development and familiar with magnetic circuits.
2. Measuring and control instruments. Background should be in electrical engineering, including electronics. Statement of Availability Required.

Box 222, c/o RADIO Magazine

BIBLIOGRAPHY

[Continued from page 35]

Landing Beam—H. Diamond and F. W. Dunmore—Research Paper RP-1006, (*Jrnl. of Research of the National Bureau of Standards*—Vol. 19, July 1937)—Published by Department of Commerce—Bureau of Standards.

Marconi Aerodrome Approach Beacon Equipment, Type WBD, 4—*The Marconi Review*—May-August 1937, #66, Page 15.

Radio Approach System Assists Airmen to Land Under Low Ceilings—*Air Commerce Bulletin*—Vol. 5, #7, Jan. 15, 1934, Page 165.

Performance Data on Systems of Radio Aids for Blind Landing of Aircraft—*Air Commerce Bulletin*—Vol. 4, #21, May 1, 1933, Page 525.

Performance Tests of Radio System of Landing Aids—H. Diamond—Research Paper RP-602 (Reprint of *Jrnl. of Research of the National Bureau of Standards*—Vol. 11, October 1933) Published by Dept. of Commerce, Bureau of Standards.

Flying in Fog—*Aeroplane*—Vol. 38, Feb. 5, 1930, Page 234.

Blind Flying—A Race Against Death with Only Dials to Guide You—Assen Jordanoff—*Popular Science*—Vol. 117, Nov. 1930, Page 38.

A Radio Beacon and Receiving System for Blind Landing of Aircraft—H. Diamond and F. W. Dunmore—Research Paper RP-238 (*Jrnl. of Research of the National Bureau of Standards*—Vol. 5, 1930)—Published by Dept. of Commerce, Bureau of Standards.

Landing Blind: System in Use at Pittsburgh Airport—C. S. Van Dresser—*Radio News*—Vol. 20, July 1938, Page 16.

Air Track has New Position Finder on the Marker—*Aviation*—Vol. 37, July 1938, Page 41.

Statue of Instrument Landing Systems—W. E. Jackson—*IRE Proceedings*—June 1938, Page 681.

Experiments with Underground Ultra High Frequency Antenna for Airplane Landing Beam (Pit aerial and transmitter, for centre of landing field to give steeper approach path and other advantages: with mathematical analysis and investigation of polarization of received wave)—H. Diamond and F. W. Dunmore—*National Bureau of Stds. Jrnl. of Research*—Vol. 19, #1, July 1937, Page 1.

Air Track—C. E. Planck—*Southern Flight Magazine*, March 1937.

Air Track—*Aviation Magazine*—March 1937.

Modern Aircraft Radio—W. E. Jackson—*National Safety News*—October 1935; also published in *Shell Aviation News*—Feb. 1936, and *Revista de Aeronautica*—April 1936.

Zero-Zero; two systems for blind landing of aircraft by radio—E. A. Cutrell—*Aviation*—Vol. 34, August 1935, Page 22.

Radio Blind Landing System to be Installed on Mid-Continental Airway—*Air Commerce Bulletin*—Vol. 6, Feb. 1935, Page 179.

Radio System for Landing Aircraft During Fog—H. Diamond—*Electronics*—June 1933, Page 158.

Radio System for Blind Landing of Aircraft to be Given Service Tests—*Air Commerce Bulletin*—Vol. 4, #18, March 15, 1933, Page 441.

Airplanes Land Blind—Guided by Radio—H. Diamond and F. W. Dunmore—*Sci. Am.*—Vol. 145, July 1931, Page 20.

A Radio Beacon and Receiving System for The Blind Landing of Aircraft—H. Diamond and F. W. Dunmore—*Bureau of Stds., Jrnl. of Research*—Vol. 5, Page 897, 1930—*IRE Proceedings*—Vol. 19, Page 585, 1931.

Air Commerce Bulletin—(in Brief) No. 2, August 15, 1930, Page 79.

Performance Tests of a Radio System of Landing Aids—H. Diamond—*Bur. of Stds., Jrnl. of Research*—Vol. 11, 1933, Page 463—*Air Commerce Bulletin* (in brief), No. 4, March 15, 1933, Page 441 and May 1, 1933, Page 525.

The Present State of Development of Radio Instrument Airplane Landing Systems in this Country and Abroad—E. N. Wendell—*Proceedings Radio Club of America*—Vol. 15, #3, March 1938, Page 22.

Lorenz Instrument Landing System as Demonstrated at Indianapolis—*Communication & Broadcast Engineering*—June 1937, Vol. 4, #6, Page 12.

Ultra-Short-Wave Radio Landing Beam—R. Elsner and E. Kramer: Lorenz Co.—*Communication & Broadcast Engineering*—Vol. 4, #3, March 1937, Page 12.

Ultra-Short-Wave Radio Landing Beam: The C. Lorenz-A.G. Radio Beacon Guide Beam System—R. Elsner and K. Kramer—*Electrical Communication*—Vol. 15, #3, January 1937, Page 195.

Pea Soup Parking—*The Airplane*—March 4, 1936.

The Technique of Blind Approach—*Flight*—Sept. 17, 1936.

Bad Weather Landing Apparatus—W. Moser—*Telefunken Zeitung*—Vol. 17, #74, Nov. 1, 1936, Page 5.

[To Be Continued]

Jackson—
1935: also
ews—Feb.
ica—April
and landing
Cutrell —
Page 22
to be In-
way — Air
Feb. 1935,
craft Dur-
mics—June
g of Air-
ts — Air
18, March
y Radio—
ore—Sci
20.
g System
ircraft—H
Bureau of
Page 897,
19, Page
ef) No. 2
System of
— Bur. of
. 11, 1933,
ulletin (in
Page 441
opment of
nding Sys-
ad—E. N.
Club of
1938, Page
System as
Communi-
g — June
ng Beam-
renz Co.—
Engineering
ge 12.
ing Beam-
acon Guide
K. Kramar
ol. 15, #3
ne—March
ach—Flight
tus — W.
— Vol. 17,
RADIO



High dielectric strength of Geon electrical insulation proved by a string of beads

AS GEON insulated wire leaves the extruder and the cooling bath in today's modern wire factories it passes through a group of little metal beads like the ones in the picture. In this test the beads are charged with high voltages well beyond the requirements of the insulation being applied to the wire. Thus high dielectric strength which permits *thin-wall* insulation—and its attendant gains in all phases of wiring efficiency—is assured.

Additional tests demonstrate and safeguard this and other important electrical properties of the polyvinyl material that has served so well as self-extinguishing insulation for navy cable of all kinds, abrasion-resistant insulation for assault wire and in many other war applications. Soon GEON insulation will go into thousands of new homes and factories that will be built when materials are released for this purpose. For its electrical properties will mean thinner insulation, which will permit more conductors per conduit. The slick surface will mean easier installation; time and money saved. Its aging qualities

will practically eliminate maintenance and replacement.

Further, GEON electrical insulation has outstanding resistance to chemicals, air and ozone, oils and greases, aging and light. And it can easily be colored in the 14 standard NEMA colors. These properties may be had in a wide variety of combinations to meet specific service conditions.

Right now all the GEONS are subject to allocation by the War Production Board. Limited quantities can be had for experiment and our development staff and laboratory facilities are available to help you work out any special problems and applications. For more information write department WW-1, Chemical Division, The B. F. Goodrich Company, 324 Rose Building, Cleveland 15, Ohio.




CHEMICAL DIVISION
THE B. F. GOODRICH COMPANY

324 ROSE BUILDING • CLEVELAND 15, OHIO

RADIO

★ JANUARY, 1945

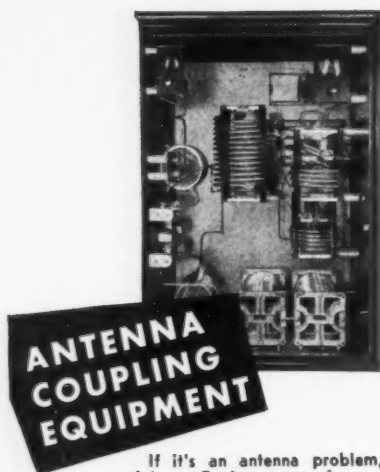

If it's an antenna problem, Johnson Engineers can give you the answer. Don't waste power. Johnson antenna coupling units insure a perfect match and maximum power transfer. Housed in weather-proof cabinets, they provide an inner door with glass window for observing meter, thereby protecting observer from high voltage.

Other Johnson products include phasing equipment, concentric line, tower lighting chokes, sampling transformers, inductors, condensers, insulators and similar items. Write for more information and prices.



Wanted ENGINEERS

- Radio
- * Electrical
- Electronic
- * Mechanical
- Metallurgical
- * Factory Planning
- Materials Handling
- Manufacturing Planning

Work in connection with the manufacture of a wide variety of new and advanced types of communications equipment and special electronic products.

Apply (or write), giving full qualifications, to:

R.L.D., EMPLOYMENT DEPT.,

Western Electric Co.

100 CENTRAL AV., KEARNY, N. J.

*Also: C. A. L.

Locust St., Haverhill, Mass.

Applicants must comply with WMC regulations

TECHNICANA

[Continued from page 14]

From the mixer plate the signal is taken to the first a-f. amplifier V_4 through a combination parallel-series low-pass filter. The a-f signal develops across the series circuit and is applied to the grid of V_4 .

The second amplifier tube is V_6 . Gain is adjusted by two controls leading to the V_6 input. Tube V_6 is a triode-connected output pentode, used as a cathode follower to provide an output impedance of approximately 150 ohms.

Tube V_7 is an electron-ray tube used to adjust zero setting or to make frequency checks against the supply voltage frequency or its harmonics.

The capacity network is illustrated in Fig. 6, in which C_2 is the major part of the tuning capacity for the variable oscillator. Capacitor C_1 is employed for zero adjustment.

The main tuning capacitor C_5 , in parallel with C_6 , is in series with C_3 and C_4 at the high setting, and in parallel with C_7 at the low setting.

Full coverage of the range, without cramping at either end, is made possible by the circuit used.

RESISTORS

★ The limitations to the use of composition and carbon resistors are strikingly illustrated by use of a chart showing the cumulative effects of permissible deviations from nominal rated value.

This chart, which is duplicated in Fig. 7, was prepared by Thomas Roddam in an article entitled "Standardized Components, Part 1" which appears in the December 1944 issue of *Wireless World*.

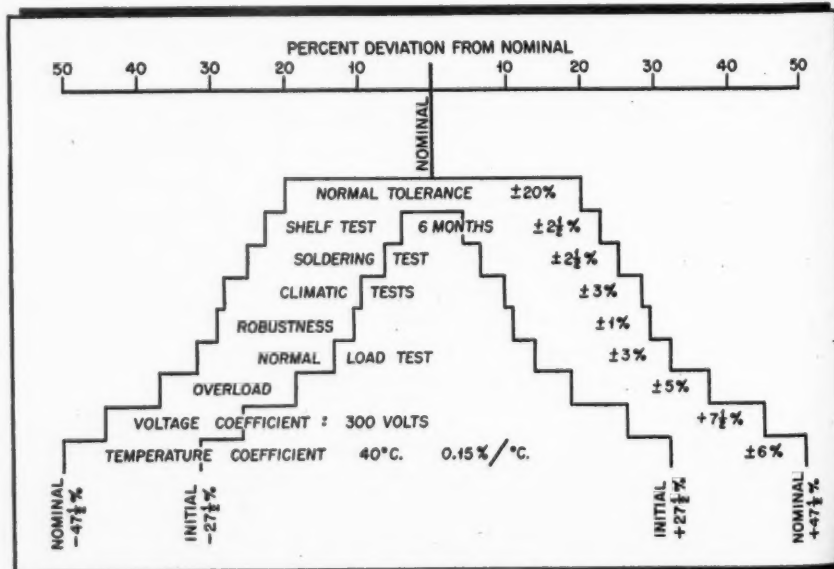


Figure 7

The author examines some of the implications of the war specifications published by the British Standards Institution in "The Services Radio Components Book".

The resistance deviations of Fig. 7 are more or less nominal deviations to be expected in "Class 2" composition resistors, but the chart is useful as a guide for circuit designers when selecting components.

The so-called "Class 2" composition resistor is described as one having medium stability and constructed either with a film composition or a solid carbon composition moulded into a rod. It may be either insulated or uninsulated.

The "Class 1," or high stability resistor is constructed with a carbon film deposited on a glass or ceramic tube and may be insulated, or not. The "Class 1" resistor is characterized by smaller deviations than are shown in Fig. 7, the total deviations amounting to approximately 11% from nominal, instead of 27 1/2%.

The author discusses briefly noise voltages appearing in composition resistors and frequency effects, also wire would and variable resistors.

EFFECT OF HIGH TEMPERATURE SOLDERS ON COPPER WIRE

★ Proof that commonly used high temperature molten solders have destructive effect on copper wire has been discovered by engineers of the Fairchild Camera & Instrument Corporation, New York.

While conducting tests that resulted in the finding of a new method for clean-stripping Formex type insulation from fine wire (sizes #36-44), Fairchild engineers explored this interesting phenomenon, and have worked out a preventative. Since its existence may not be generally known, this destructive effect and the remedy should be of particular interest to engineers and

[Continued on page 76]

of the
cations
ds In-
Com-

Fig. 7
ons to
osition
l as a
select-

osition
having
either
solid
a rod.
minisu-

ity re-
on film
c tube
The
zed by
own in
unting
ominal,

noise

on re-
o wire

h tem-
structive
covered
nera &
t.
ulted in
clean-
om fine
engineers
on, and
since its
own, this
should
ers and
age 76]

50

NOMINAL
+47 1/2 %

DIO


A Safe Bet for Steady Sales



Left—MARINE SPEAKER; approved by the U. S. Coast Guard, for all emergency loudspeaker systems on ships. Re-entrant type horn. Models up to 100 watts. May be used as both speaker and microphone.



Right—RE-ENTRANT TRUMPET; available in 2 1/2-3 1/2-4 1/2-6 ft. sizes. Compact. Delivers highly concentrated sound with great efficiency over long distances.




Left—RADIAL HORN SPEAKER; a 3 1/2' re-entrant type horn. Projects sound over 360° area. Storm-proof. Made of RACON Acoustic Material to prevent resonant effects.



Right—AEROPLANE HORNS; super-powerful and efficient P.A. horns for extreme range projection. 9-4 and 2 unit Trumpets available.



Left—PAGING HORN; extremely efficient 2' trumpet speaker for use where highly concentrated sound is required to override high noise levels. Uses P.M. unit.

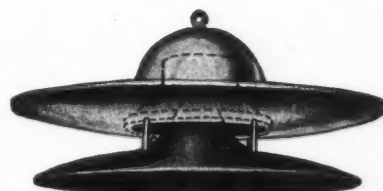

Right—RADIAL CONE SPEAKER; projects sound over 360° area. Cone speaker driven. Will blend with ceiling architecture. RACON Acoustic Material prevents resonant effects.

SEND FOR CATALOG

RACON, pioneer and world's largest manufacturer of loudspeakers, horns and driving units, is working at capacity filling diversified orders — speakers for Army, Navy, Maritime Commission, Signal Corps, etc. and industrial use. Now we are planning ahead.

Practically all industrial firms are users, or potential users of some type public-address, paging or sound distribution system. Statistics prove that a properly planned sound system installation is a good investment which in time generally pays for itself.

RACONS have always enjoyed a steady, high sales volume. We believe they always

will, for our products are the finest that money can buy, or engineering skill produce. Receiver units supplied with either metal or plastic diaphragms. RACON products generally cost less than competitive brands because a lower power-rated and lower-priced RACON will outperform higher power-rated units of other make. In other words, don't let catalog list-prices fool you. Basic costs and rated outputs are the prime factors worth considering. That's why leading soundmen prefer and specify RACONS, they are dependable—a safe bet for steady sales and satisfied users.



RACON ELECTRIC CO. 52 EAST 19th ST. NEW YORK, N. Y.

RADIO

★ JANUARY, 1945

*Complete
Flexibility
of Scene Setting
with*

CLANCY PATENTED TELEVISION STUDIO

- In a Clancy Television Studio, any scene can be placed at any angle anywhere in the studio for best camera position and lighting. The entire day's program can be set in advance. After one act is televised, it can be dismantled and moved out without loss of time or interference with the next act. Where needed, extra spotlights can be carried on the same overhead system.

- The floor is completely clear for easy maneuverability — no ropes, props or other obstructions. While best incorporated in the plans for new studios, the Clancy Patented Studio can be adapted to any existing television studio.

Write for
Complete Details

J. R. Clancy, Inc.

Syracuse 4, New York

World's Largest Manufacturers
of Mechanical Stage Equipment

WANTED DESIGNER

A Central New England manufacturer employing over 1000 people needs Draftsman-Designer on telephone and signaling (mechanical) apparatus. Knowledge of die-casting and plastic applications desirable.

WMC Regulations Prevail.
Reply to Box 223,
c/o RADIO Magazine

production men in the electrical, radio and electronic fields.

The Fairchild tests with small diameter copper wires show the need of rigid temperature control, and, to a lesser degree, close attention to solder composition, in the hot tin dip method of tinning or soldering wires. The life of fine wire, dipped in any solder, is lessened with increasing solder temperature. Low temperature solders, from the melting or liquid point to 600 degrees (Fahrenheit), should be used for tinning and making joints on wire sizes finer than approximately #34 (.0063-inch diameter).

Conclusions reached indicate high solder temperatures are more destructive to wire if the tin content of the solder is too high. This destructive effect also increases as the wire diameter becomes finer. By proper control and by proper clean-stripping—in case of insulated wires, synthetic or otherwise—this danger can be avoided. Tests reveal positively that life of a given wire is greater if lead content of the solder, for any temperature, is higher.

Hitherto, one of the most widely used methods of stripping and tinning Formex-insulated wire has required that the wire be dipped into molten solder held at about 1025-1100° F. This is commonly known as the "hot dip solder method," and is a single-step operation for both stripping and tinning such coated wire. Although an efficient method, it has a major drawback in that high temperatures are required for proper removal of synthetic insulation.

In this method, laboratory tests show two effects: 1) the wire suffers a reduction in diameter in the stripped and tinned section; 2) some embrittlement of the wire occurs due to the high temperatures encountered.

The crux of the investigation of the hot dip solder method shows other factors. Synthetic rosin-coated wire must be dipped, above a critical temperature of 932° F., into molten solder. Polyvinyl acetal insulation is transformed by the heat, and insulation in this action apparently serves as a flux to permit tinning of the copper wire in the same dipping operation. More positive and complete stripping and tinning are obtained at slightly higher temperatures, approximately 1025-1100° F. For example, in the small wire sizes of #29 H.F. (Heavy Formex) and #40 H.F., the action is completed in about 10 and three seconds, respectively, both at about 1050° F.

Further, if the wire is kept in the hot solder long enough, the submerged section is completely eaten away. "Long enough" is an inadequate expression here; for #29 H.F. wire it represents about 20 seconds, and for #40 H.F., 5-6 seconds. The leeway for #29 is relatively appreciable, but not for #40 wire. Heavy Formex will not properly strip and tin below the indicated times, and fine wire suffers by this tight control. Although stripping-tinning action may be held through close control to the minimum time required, some copper loss can be expected. Higher temperatures, up to 1175° F., reduce the minimum dipping times, but also shorten the destruction times. Number 40 H.F. is destroyed practically as the stripping and

tinning are completed.

A review of this data leads to three major conclusions:

1) The life and diameter of any small to fine size copper wire in any solder is decreased with increasing molten solder temperatures.

2) The higher the tin content of tin/lead solder, the shorter is the life of a given wire in that solder for any given solder temperature. Unfortunately, however, an all-lead solder results in a considerably weaker solder joint than tin/lead solders.

3) For a given solder composition and solder temperature, the finer the wire size (diameter) the shorter is the wire life in the solder.

Further conclusions to the tests are:

The all-around best solder of those tested appears to be the 40/60 combination, commonly referred to as soft solder. Other solders in this vicinity may offer even better properties. For certain other purposes, regardless of these findings, hard, or 60/40 solder may be best.

Some form of wire weakening or loss of tensile strength, broadly classified as embrittlement, may be imparted to copper wire from tin/lead solders in the 1000° F. temperature range.

On the basis of these facts only, it is apparent that a low solder temperature should be used for tinning and/or making joints on wire sizes finer than approximately #30-32. Preferably, these solder temperatures should be kept either within

WANTED for INDIA!

Plan now for your share in the rich Indian market. A well-known Indian firm, established for a quarter of a century, is prepared to work as sole agents in India for reputable manufacturers of radio equipment and supplies. India also needs modern plants and machinery to build up many key industries. Address inquiries to our American representative:

MAX VAN PELS
441 LEXINGTON AVE.
NEW YORK 17, N.Y.

ELECTRONIC DESIGN SERVICE

- ELECTRONIC DEVICES
- TRANSMITTERS
- RECEIVERS

RADIO

BOX 111

150° to 200° F. above the melting or liquid point of the solder used, or under 600° F. For Formex or Formvar coated wires, a low temperature insulation stripping method other than the hot tin dip method now becomes necessary. Other methods, involving high temperatures, such as the gas flame method, tend to introduce wire embrittlement and copper oxidation, and are no better.

In summary, for the safety of the wire lead being stripped, the production assembly schedule, or the final assembled piece of precision equipment—electric motor or other appliance—it is important that the fine sizes (#34-46) of synthetic coated wire be stripped, tinned and joined or soldered at temperatures at or under 600° F.

This phenomenon in wire destruction is not alone interesting, it is important and serious. Such reduction in diameter in hot tin dipping means weakened leads, perhaps production losses either at the dipping operation, or later in assembly, and an inferior product that fails in the field; this is especially true in the finer wire sizes of #34-40, or even finer.

Based upon these initial observations, detailed tests were conducted by Fairchild engineers. The tests were to determine the time required for complete destruction of copper wire. Three variables had to be considered in these tests:

1) **Wire size**—Three wire sizes, #29, #34 and #40, were selected as representative of the more commonly used small and fine wires which would suffer to some degree under this known destructive action.

2) **Solders**—Three tinning solders, 60 tin/40 lead, 40 tin/60 lead, and 0 tin/100 lead (using pure lead), gave an approximate general working range down to pure lead. This was considered an indicative selection of tinning solders.

(Incidentally, metallurgically, all solders with a melting point below 600-700° F. are defined as "soft" solders. All solders having a melting point of approximately 1100-1200° F. are considered "hard" solders; this includes silver solders. Sometimes, though, silver solder is used; its melting point is about 1200° F. All the tin/lead solders are considered "soft," but 40/60 is often referred to as "soft" solder; 50/50 as "common" solder; 60/40 as "hard" solder. The difference in solder designations, metallurgically, and in the trade, should be borne in mind.)

3) **Solder temperature**—For purposes of these tests at Fairchild's, temperature ranges of 550 to 1175° F. were selected. A 600° range represents the lowest reasonable working temperature practical, just above the melting or liquid points of soft solders. It should be noted that 60/40 solder melts and goes into the liquid state at about 400° F., 40/60 solder becomes mushy at its melting point of about 360° F., and goes into the liquid state at about 475° F., and pure lead melts to a liquid at 621° F.

The 1100° F. group, however, was considered as representing the approximate working range that would be encountered in normal practice for hot tin dip stripping of Formex. In these laboratory tests it was found that Heavy Formex coated wire

required minimum temperatures of 1005-1025° F. to be stripped.

All test samples of copper wire were stripped in advance of the synthetic insulation. This was essential because, first, the synthetic insulation would not be affected by temperatures below 1000° F.; second, all wire specimens should be in like condition for the consistency of test results. Formex was stripped from the wire samples by the new Fairchild process of stripping Formex coating by dipping the wire in two chemical solutions, leaving test specimens in thoroughly clean and usable condition.

All wire test specimens were bent into a standard hairpin shape with one side bent outward at right angles near the end opposite the loop. The specimens were handled by this projection. They were plunged, loop down, into the molten solder, only deep enough to permit the free side to remain out of the solder to about one-half its length. When this vertical projection fell over, due to the destructive action of the solder, the test specimen was considered destroyed as the wire was so eaten away as to be incapable of supporting even this small weight.


The wire life or destruction time was measured accurately from the moment of entry into the solder. The solder was kept in a temperature-controlled, electrically-heated castiron pot of two cubic inches capacity. Dross was scraped from the solder surface immediately before each test.

No attempt was made in the Fairchild investigation to determine an optimum tin/lead ratio.

All curves clearly demonstrate that temperature increase has a tremendously non-beneficial effect upon the destruction time. An unfortunate but important outcome of this analysis is that, for a given set of conditions, wire life decreases materially with decrease in wire size (diameter).

This destruction of the copper is believed to be an alloying away, or driving into, solution of the copper largely by the tin in the solder and to a smaller degree by the lead. Melting points of these three metals are: copper 1981° F., tin 450° F., and lead 621° F. In metallurgy, two metals of different melting points will result in a mixture with a lower melting point than either of the constituent metals possesses alone. Although the melting point of the copper is high, it is believed that the presence of the two other molten metals causes the copper to be dissolved into the tin/lead alloy by this action. In effect, the molten solder is the solvent.

The second detrimental condition of wire embrittlement at high temperatures has been observed. Photo-micrographic analysis of longitudinal sections of untinned and tinned wires shows a surface to subsurface coarsening of the copper crystals in 1050° F. solder dipped wire. This zone does not penetrate to a great depth. Also, a new constituent of possibly a copper-tin alloy is to be found between the solder and copper zones in the 1050° F. wire. This new constituent generally is hard and probably is a contributing factor to fatigue failure of wire. This condition has not been extensively at Fairchild Camera & Instrument, and only in a secondary sense.

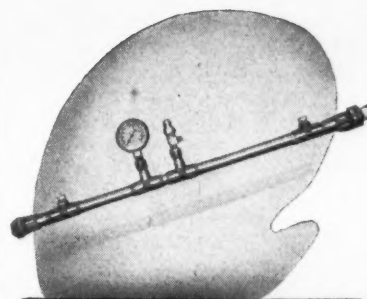

COPPER TUBING CONCENTRIC LINE

Standard stock sizes include 5/16", 1/2", 3/4", 1-1/4" and 2-1/4". Other sizes can be manufactured on special order. Johnson concentric line is accurately designed for uniform impedance and manufacturing methods insure accurate diameters of both outer and inner conductors and maintenance of spacing ratios within close limits. Insulation is Alsimag 196, conductors are pure copper, and special manufacturing techniques at joints insure lower losses.

Complete lines of fittings, gauges, valves, expansion joints, and gas equipment are also available. Write today for recommendations and prices.



JOHNSON
a famous name in Radio

E. F. Johnson Co. Waseca, Minn

NATION-WIDE
MAIL ORDER
DISTRIBUTORS
SINCE 1928



**RADIO AND
ELECTRONIC**

DEVICES

For...

**TRADE
INDUSTRY
VOCATIONAL
COMMUNICATION
PUBLIC UTILITY
and
EXPERIMENTAL
APPLICATIONS**

BURSTEIN-APPLEBEE CO.

1012-14 McGEE ST.

KANSAS CITY 6, MISSOURI

RADIO

★ JANUARY, 1945

VACUUM TUBE VOLTMETER RF - AC - DC

The result of 10 years of
Vacuum Tube Voltmeter
Engineering.



MODEL VM-27

1-3-10-30-100 volts full scale.
Peak response, r.m.s. calibration.
HIGH IMPEDANCE—4 megohms at 50
cycles, 60,000 ohms at 100 megacycles.
7 megohms for d-c.
ACCURATE—Better than 2 percent on
d-c and 60 cycles thru megacycles.
SELF-CONTAINED—115 or 230 volt
50-60 cycle line operation.



RF PROBE

Interchangeable probe included for
convenience and efficiency in making
AC and RF measurements. Input ca-
pacity 5 micro farads. Ruggedly
mounted 6H6 tube in balanced circuit.
Complete \$150 net f.o.b. Flushing, N. Y.

ACCESSORIES

To increase VM-27 range to 1000 volts.



10X AC MULTIPLIER MODEL ACM-27

Input impedance even greater than
probe alone. Flat response from 20
cycles to 200 megacycles.

\$17.00 net f.o.b. Flushing, N. Y.



10X DC MULTIPLIER MODEL DCM-27

5 megohms input resistance.


\$8.00 net f.o.b. Flushing, N. Y.

IMMEDIATE DELIVERIES

ALFRED W. BARBER LABORATORIES
34-04 FRANCIS LEWIS BLVD.
FLUSHING, N. Y.


ADVERTISING INDEX

ADVERTISER	PRODUCT	PAGE
Acme Elec. & Mfg. Co.	Transformers	9
Aerovox Corporation	Capacitors	54
Albion Coil Company	Coils	53
Allied Radio Corporation	Electronic Equipment	7
Altec-Lansing Corporation	Loudspeakers	12
American Phenolic Corporation	Plugs, Cables, Connectors, Sockets	15
Amperite Co.	Relays	54
Automatic Elec. Sales Corp.	Relays	51
Barber Labs., Alfred W.	Test Equipment	72
Bell Telephone Labs.	Institutional	61
Bliley Electric Co.	Quartz Crystals	8-B
Bridgeport Mfg. Co.	Coils	59
Burstein-Applebee Co.	Electronic Equip.	71
Cambridge Thermionic Corp.	Turret Lugs, Trans., Crystals	9, 58
Cinaudagraph Speakers, Inc.	Speakers	58
Clancy, Inc., J. R.	Television Studio	70
Concord Radio Corporation	Electronic Equipment	52
Conn. Tel. & Elec. Div.	Electrical Equipment	55
Drake Mfg. Co.	Neon Light Assemblies	52
D-X Crystal Co.	Crystals & Loop Antennas	60
Eitel-McCullough, Inc.	Tubes & Vacuum Pumps	57
Electronic Laboratories, Inc.	Vibrator Power Supplies	8a
Electronic Mechanics, Inc.	Insulating Materials	1
Electro-Voice Corporation	Microphones	14
Federal Tel. & Radio Corp.	Cable, Wire	2
Formica Insulation Co., The	Laminated Plastics	11
Goodrich Co., The B. F.	Insulation Material	67
Hallicrafters Co., The	Communication Equipment ..	10
Harvey Radio Co.	Radio & Electronic Equip. ...	56
Harvey Radio Labs., The	Electronic Instruments ...	Cover 3
Hytron Corporation	Tubes	13
Jensen Radio Mfg. Co.	Acoustic Equipment	49
Johnson Co., E. F.	Transmitter Components 4, 66, 68,	71
Ken-Rad Tube & Lamp Corp.	Electronic Tubes	48
Maguire Industries, Inc.	Help Wanted	66
McElroy Mfg. Co.	Wireless Tel. Apparatus	64
Murray Hill Books, Inc.	Technical Books	43
Mycalex Corp. of America	Insulating Materials	16
National Union Radio Corp.	Electronic Tubes	8
Racon Electric Co.	Speakers	69
Radio Corp. of America	Audio (Chanalyist)	47
Raytheon Production Corp.	Tubes	Cover 2
Rider, John F. Publ., Inc.	Technical Books	62
Sigma Instruments, Inc.	Relays	60
Small Motors, Inc.	Small Motors	50
Sperry Gyroscope Co., Inc.	Radio-Electronic Devices ..	Cover 4
Sprague Electric Co.	Resistors	45
Stupakoff Ceramic & Mfg. Co.	Ceramics	65
Surprenant Elec'l Insulation Co. ...	Plastic Insulations	64
Sylvania Elec. Prod., Inc.	Tubes	6
Tech Laboratories	Attenuators	56
Thordarson Elec. Mfg. Co.	Transformers	14
Triplett Elec. Instru. Co.	Portable Instruments	62
Universal Microphone Co.	Microphones	63
U. S. Treasury Dep't	War Bonds	71
Van Pells, Max	Distribution	70
Western Electric Co.	Help Wanted	68
Wholesale Radio Labs.	Tube Base Calculators	46
Wrigley Jr., Co., Wm.	Institutional	44



HARVEY UHX-25

A 25-Watt General Purpose Radio-Tel-
ephone Transmitter—Available for op-
eration between 1.5 M.C. and 30 M.C.

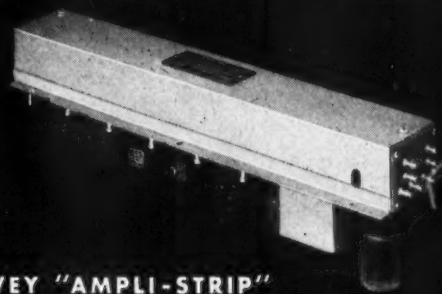

HARVEY "AMPLI-STRIP"

For I-F and AUDIO Amplification.

OF CAMBRIDGE

RADIO AND ELECTRONIC EQUIPMENT


The units illustrated are representative of HARVEY OF CAMBRIDGE design and construc-
tion "know-how" as well as precision of
manufacture and testing. Each is a preci-
sion product designed and developed by
HARVEY OF CAMBRIDGE to fill specific needs
in the radio-electronic fields.

Some, like the 206 PA Power Supply
and the "Ampli-Strip" are new develop-
ments resulting from HARVEY's one-hundred
per cent war work.

Others, like the UHX-25 Transmitter and


Marine 25 Radio Telephone are typical
of HARVEY OF CAMBRIDGE products which
have long been recognized as standards
of quality and dependability.

Years of exclusive specialization in the
manufacture and development of this
type of equipment are your guarantee of
complete satisfaction from all HARVEY OF
CAMBRIDGE products and of competent, in-
telligent assistance in bringing to a suc-
cessful solution any of your present or
projected radio-electronic problems.

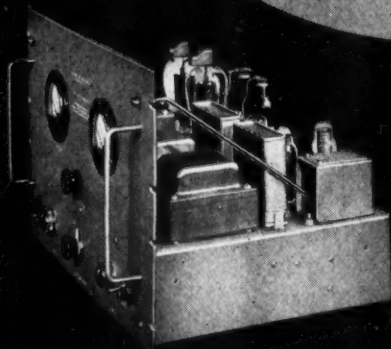

HARVEY Regulated Power Supply 206 PA

For laboratory D.C. Source—Range 500
to 1000 volts.

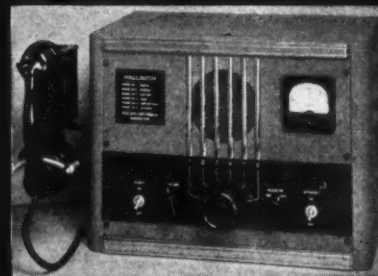


HARVEY MARINE 25

A 6-Channel Marine-Radio Telephone.

HARVEY

OF CAMBRIDGE

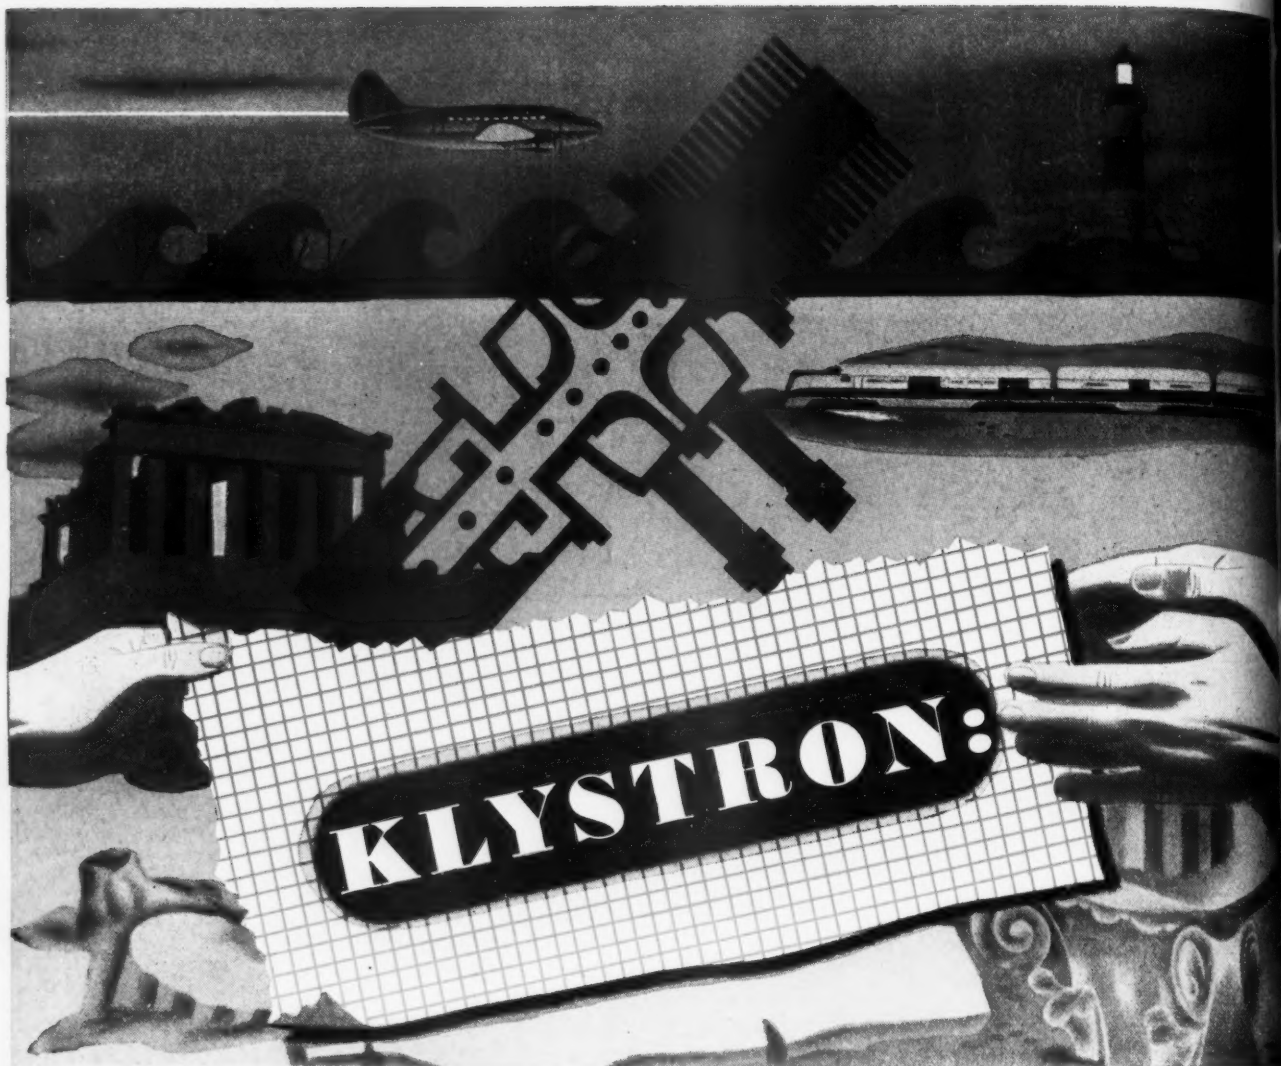

The Greeks gave us a word for it . . . now we give it to *you*

WHEN Sperry first developed its velocity-modulated, ultra-high-frequency tube, the word "KLYSTRON" was registered as the name of the new device.

This name — from the Greek, as coined by scientists of Stanford University — is an apt description of the bunching of electrons between spaced grids within the tube.

"Klystron" is a good name. So good, that it has come into widespread use as the handy way to designate *any* tube of its general type,

whether a Sperry product or not.

This is perfectly understandable. For the technical description of a Klystron-type tube is unwieldy, whether in written specifications, in conversation, or in instructing members of the Armed Forces in the operation of devices employing such tubes.

These conditions have prompted many requests from standardization agencies—including those of the Army and Navy—for unrestricted use of the name Klystron. In the public interest, Sperry has been glad to

comply with these requests . . .

From now on, the name KLYSTRON belongs to the public, and may be used by anyone as the designation for velocity-modulated tubes of any manufacture.

Sperry will, of course, continue to make the many types of Klystrons it now produces, and to develop new ones.

On request, information about Klystrons will be sent, subject to military restrictions.

SPERRY GYROSCOPE COMPANY, INC. GREAT NECK, N. Y.

Division of the Sperry Corporation



LOS ANGELES • SAN FRANCISCO • NEW ORLEANS
HONOLULU • CLEVELAND • SEATTLE

GYROSCOPICS • ELECTRONICS • RADAR • AUTOMATIC COMPUTATION • SERVO-MECHANISMS